WESTSIDE DRIVE SEWER PLANNING NHDES Project No. D2020-0607

EXETER, NEW HAMPSHIRE



FINAL - MAY 23, 2022



Portsmouth, New Hampshire UE File No. 2588

Table of Contents

1. Project Description	
1.1. Project Background	
1.2. Conditions Requiring Improvements	
1.3. Project Goals and Deliverables	
1.3.1. Task #1 – Public Participation and CSS Approach	
1.3.2. Task #2 - Mapping and Base Plan Development	
1.3.3. Task #3 – Subsurface Investigation and Evaluation	
1.3.4. Task #4 – Basis of Design Planning Document and Conceptual Design	ı 4
1.3.5. Task #5 – Town Sewer Asset Management Plan (AMP) Supplement	
1.3.6. Project Deliverable Summary	
2. Existing Conditions	
2.1. Location and Project Boundaries	
2.2. Maps and Water Bodies	5
2.3. Subsurface Conditions	
2.4. Existing Infrastructure	
2.4.1. Sewer System	
2.4.2. Road Surface Condition	
2.4.3. Drainage System	
2.4.4. Water System	
2.4.5. Private Utilities (electric, cable, gas)	
2.5. Ownership	
2.6. Environmental Assessment and Little River Flood Stage	
3. Summary of Findings and Identified Project Needs	
3.1. Summary of Findings	
3.2. Roadway Restoration Alternatives	
4. Recommended Basis of Design	
4.1. Roadway Improvements	
4.2. Municipal Water Improvements	
4.3. Drainage Improvements	
4.4. Private I/I Mitigation	
4.5. Sewer Improvements	
4.6. Engineer's Opinion of Probable Cost	
4.7. Anticipated Permitting	
5. Recommended Next Steps	

List of Figures

- Figure 1 Vicinity & Location Map
- Figure 1A Existing Drainage Patterns
- Figure 2A Existing Conditions
- Figure 2B House Inspection Results
- Figure 2C Road Condition Analysis
- Figure 3AConceptual Roadway Plan #1 (Perimeter Sidewalk)
- Figure 3B Conceptual Roadway Plan #2 (No Sidewalk)
- Figure 4A Conceptual Drainage Improvements Plan
- Figure 4BConceptual Drainage improvements Profile Key

Figure PRO#1 Conceptual Drain Profile Outfall #1

Figure PRO#2 Conceptual Drain Profile Outfall #2

Figure PRO#3 Conceptual Drain Profile Outfall #3 (North Profile)

Figure PRO#4 Conceptual Drain Profile Outfall #3 (South Profile)

Appendices

- A. Approved Engineering Report Phase Contract
- B. Public Input Questionnaire
- C. Public Information Neighborhood Meeting No. 1
- D. Public Information Neighborhood Meeting No. 2
- E. Survey Data
- F. Geotech Report
- G. Internal Building Inspection Summary and Reports
- H. Road Condition Analysis
- I. Drainage Structure Inspections
- J. Water Asset Management Plan Excerpts (2015)
- K. FEMA Flood Map (2020)
- L. FEMA Letter of Map Revision (2018)
- M. CSO LTCP Update Report Excerpts (2017)
- N. Engineer's Opinion of Probable Cost

1. **Project Description**

The primary objective of this study was to develop a report phase preliminary design report for the Westside Drive Neighborhood to help mitigate private Infiltration and Inflow (I/I) and plan for future neighborhood infrastructure projects. Private I/I sources (primarily illicit sump pumps connected to the sewer) were previously identified as problematic in this neighborhood so the focus of this study was to identify a basis of design to help address illicit sump pumps while considering the neighborhood's other infrastructure needs.

1.1. Project Background

Underwood Engineers, Inc. (UE) and Town of Exeter, New Hampshire (The Town) entered into the *Westside Drive Sewer Planning Report Phase Engineering Contract* on August 3, 2020 (Appendix A). The scope of work and engineering contract was approved and partially funded using New Hampshire Department of Environmental Services (NHDES) Clean Water State Revolving Loan Fund (CWSRF) planning funding and built on UE's previous wastewater work for the Town. The following are some of the key reports that served as the foundation for this study:

- *Phase III Infiltration and Inflow Evaluation, January 14, 2013* (Phase III I/I Study): This UE study built on previous investigations by others to evaluate Infiltration and Inflow (I/I) in the Town's wastewater collection system. This document served as the Town's Combined Sewer Overflow (CSO) Long-Term Control Plan (LTCP) and identified that a significant portion of I/I in the Town's system originates from private sources. I/I flow peaks were observed to be 10 times higher than sanitary flow during flow metering and the Westside Drive neighborhood was recommended as a location where the Town could perform future private I/I mitigation work.
- Public Outreach and Private I/I Mitigation Program (2015), January 12, 2016: UE assisted the Town develop a Town-wide public information mailer and private I/I policy that was supported at all levels of the Town government. This program helped educate sewer users about I/I, why I/I causes issues for the Town's sewers, and how users can help remove private sources of I/I from the sewer. The program included a 5-year illicit sewer connection 'amnesty' program to encourage and provide users time to voluntarily remove private I/I sources from the sewer without fear of enforcement.
- Combined Sewer Overflow (CSO) Long Term Control Plan (LTCP) Update, (January 30, 2017) This study updated the Town's CSO LTCP and recommended continued private I/I mitigation including addressing private I/I issues in the Westside Drive Neighborhood (see Section 1.2).

Previous sewer investigations found that the majority of I/I in Exeter's wastewater collection system was from private sources which causes sewer flow spikes that can lead to CSOs. The Town's Phase III I/I study and CSO LTCP recommended that private I/I mitigation considerations were necessary for effective overall I/I reduction. However, it was recognized that



private I/I investigations can be intrusive to users and costly, so private I/I investigations were focused in small 'pilot' areas with the goal that the findings in the smaller 'pilot' areas could be applied to other areas of the Town's sewer system. The Westside Drive Neighborhood was one of three (3) private I/I pilot area in the Town's Phase III I/I study and CSO LTCP. The other private I/I study areas included the Jady Hill Neighborhood where the Town completed an infrastructure project several years ago and the neighborhood around Downing Court.

1.2. Conditions Requiring Improvements

The Town's Phase III I/I study and CSO LTCP found that sump pumps illicitly connected to the

sanitary sewer were a significant source of private I/I in Exeter's system and many illicit the Westside Drive sump pumps in Neighborhood were found connected to the sewer. Unfortunately, redirecting sump pumps from the sewer was found to be challenging in this area because small lots, high groundwater, and limited street drainage infrastructure limited viable alternative sump pump discharge locations. The primary goal of this study was to develop a plan to improve sump pump management in this neighborhood that was also consistent with Westside Drive's other infrastructure needs.



The 2017 *CSO LTCP Update* evaluated three alternatives to mitigate private I/I in the Westside Drive Neighborhood. These alternatives focused on providing residents with a better location to discharge illicit sump pumps and included:

- 1. Roadside drainage swales
- 2. Perforated underdrain with sump pump/drain service connections
- 3. Sump pump force main system

Schematics of these alternatives are provided (Appendix M). The 2017 *CSO LTCP* recommended roadside swales at that time as the lowest capital cost option. However, it also recommended additional evaluation and public participation to confirm the feasibility of swales which served as the foundation/basis for the evaluations performed during this study.

1.3. Project Goals and Deliverables

The tasks in the approved Scope of Services (Appendix A) were intended to gather information to help meet the goals and advance the project basis of design. This report is organized to the extent possible around the NHDES guidance provided within the *Basis of Design Reports for Stormwater Infrastructure Projects (CWSRF Funded), November 2021* as requested by NHDES where those elements are consistent with the approved Scope of Work, but some stormwater/watershed evaluations may need to be supplemented as future tasks. A summary of goals and work performed under each task is as follows:



1.3.1. Task #1 – Public Participation and CSS Approach

Public participation was an important goal of the process used to develop this basis of design report. A simplified Context Sensitive Solutions (CSS) process developed originally by AASHTO and NHDOT was used help gain support of the stakeholders and develop more effective concepts. As opposed to traditional approaches the CSS process used for this study used public participation to collect information and listen to the public/stakeholders prior to presenting concepts/solutions. This task included work sessions with the Town and NHDES as well as public information meetings to solicit input from residents and stakeholders about the project. This work was performed during times of COVID-19 restrictions so sensitivity was needed for public interactions. The following meetings were held:

- <u>Project Kickoff Meeting (September 2, 2020)</u>: Kickoff meeting with the Town to establish lines of communication and plan for project activities.
- <u>Public Educational Mailer and Questionnaire (October 2, 2020)</u>: UE assisted the Town develop a letter and questionnaire to introduce neighborhood residents to the upcoming project, inform them of upcoming field activities, notify them of the upcoming public input meeting, and solicit resident's early input about the project using a voluntary questionnaire. This letter was mailed to the Westside Drive neighborhood residents and posted on the Town website. A copy this mailer is provided (Appendix B).
- <u>Public Information & Input Meeting #1 (October 28, 2020)</u>: UE helped facilitate a public meeting to introduce the project to residents and solicit public input at the start of the planning process prior to developing alternatives. The meeting was held via Zoom, included a summary of questionnaire results that had been received, and concluded with an aerial map of the neighborhood that was 'marked-up' realtime during the virtual meeting as residents voiced input. A copy of the presentation and annotated map is provided (Appendix C). During this meeting residents identified improvements to neighborhood drainage and improved options for basement sump pump discharge as critical needs to be incorporated into the plan.
- <u>Internal Building Inspections (October/November 2020)</u>: UE contracted Flow Assessment Services to perform building inspection to target the buildings that were not previously performed in 2009 as part of the *Phase III I/I Study*. Some of the residents (11) did not allow inspection due to COVID 19 concerns, but provided illicit connection information via survey. A total of 88% of the residences in the neighborhood have been inspected/surveyed to date. Building inspection forms including 2009 and 2020 inspections are provided (Appendix G).
- <u>Status Meeting with Town (March 25, 2021)</u>: UE facilitated a work session with the Town staff to review findings of the field investigations and preliminary design concepts.



- <u>Update Meeting with Town and NHDES (June 16, 2021)</u>: UE facilitated a work session with Town staff and NHDES to review the status of the project and work completed to date.
- <u>Work Session with Town and NHDES (September 14, 2021)</u>: UE facilitated a work session with Town staff and NHDES to review work completed to date and prepare for the next public information meeting.
- <u>Public Information & Input Meeting #2 (September 20, 2021)</u>: UE helped facilitate a public meeting to review preliminary design concepts and solicit public input. The meeting was held via Zoom and a copy of the presentation is provided (Appendix D). During this meeting residents reinforced the need for drainage and sump pump management improvements but also expressed a desire for pedestrian safety.

1.3.2. Task #2 - Mapping and Base Plan Development

UE created a base plan for the project using a combination of field survey and existing Town GIS information to develop preliminary design concepts. The base plan was compiled in AutoCAD Civil 3D using horizontal datum NHSPC, NAD83 (2011), and vertical datum NAVD88 consistent with Town standards so the base plan could serve as a foundation to build future design. A copy of the base plan with the survey points turned on is provided (Appendix E).

1.3.3. Task #3 – Subsurface Investigation and Evaluation

R.W. Gillespie (subconsultant to UE) performed one (1) day of borings on October 13, 2020. Eight (8) borings were advanced and groundwater piezometers were installed in four (4) of the borings. Findings are summarized in RW Gillespie's *Geotechnical Engineering Evaluation* report dated December 28, 2020 (Appendix F) and will be discussed in the existing conditions section of this report.

1.3.4. Task #4 – Basis of Design Planning Document and Conceptual Design

This task is to compile the findings and recommendations of this study into a report provided herein. See discussion in Section 1.3.6 below.

1.3.5. Task #5 – Town Sewer Asset Management Plan (AMP) Supplement

Upon completion of basis of design, UE will provide the Town with a supplement to incorporate the relevant portions of the project into the Town's Sewer Asset Management Plan.

1.3.6. Project Deliverable Summary

The purpose and deliverable of this evaluation was to <u>develop a preliminary design document for</u> <u>the Westside Drive Neighborhood that could be used as a tool for future I/I mitigation and</u> <u>project development</u>. The report provided herein summarizes the findings approved Scope of Services project Tasks 1 through 5 (Appendix A):



2. Existing Conditions

2.1. Location and Project Boundaries

The Westside Drive neighborhood is located on the west side of Exeter and is accessed from NH Route 111 (Front St./Kingston Rd.). The neighborhood was constructed in the mid to late 1970s and consists of approximately 90 single family homes built on private 0.2 to 0.5 acre lots. The neighborhood consists of approximately 30 acres and is bounded to the northwest by Front St., the southwest by the Little River, the southeast by the Boston and Maine Railroad, and to the northeast by a wooded strip comprising the back lots of adjacent neighborhoods around Charter and Carrol Streets. Westside Drive is a loop road with one access point to Front St. and the neighborhood also includes interior crossroads (Blanche, Tilton, Scammon, Silvio, Laperle) to access interior lots (Figure 1).

2.2. Maps and Water Bodies

The Westside Drive neighborhood is located along the Little River which is part of the Great Bay watershed. Runoff from the neighborhood (discussed in more detail under drainage system section) flows to the Little River which combines with the Exeter River approximately 0.7 miles southeast of the neighborhood. Approximately 0.5 miles downstream of the confluence with the Little River, the Exeter River goes over the head of tide falls in downtown Exeter and becomes the tidal Squamscott River (Figure 1).

2.3. Subsurface Conditions

The subsurface boring investigation found that the soils in the neighborhood consist of varying amounts of silty sand fill on top of native silty/clayey soils. Groundwater levels were close to the ground surface throughout the neighborhood and above the ground surface (flowing out of the piezometer) in east/northeast portions of the neighborhood. Road base materials (i.e. gravel below the pavement) were found to be 0.5' to 3' thick consisting of silty sand. Grainsize analysis showed that the road base materials did not meet NHDOT Standards due to the high fines content. The native materials found below the road base consisted of silt/clay with varying amounts of sand. An approximate 2' thick layer of organic peaty material was observed below the road base at MW-1 and B-4 approximately 3'-5' below the ground surface. A thinner peaty layer was also observed at B-2. Boring logs and geotechnical report are provided (Appendix F).

2.4. Existing Infrastructure

The existing infrastructure in the neighborhood includes municipal sewer, water, roads and drainage and private gas, electric and cable. A schematic of existing utilities is provided (Figure 2A).

2.4.1. Sewer System

The neighborhood is served by approximately 5,500 feet of 8" PVC gravity municipal sewer mains that convey wastewater to a pumping station located near intersection of Westside Drive and Court St. Select portions of the sewer mains (approximately 1,100') were CCTV inspected during the Town's *Phase III I/I Study* and the sewers were found to be in good condition. Twenty (20) sump pumps (36% of sump pumps in the neighborhood) were found to be illicitly connected to the sewer during building inspections/surveys (Figure 2B). The primary focus of sewer system improvements includes providing a viable location for residents to redirect their basement sump pumps away from the sanitary sewer.



2.4.2. Road Surface Condition

The existing roads (~5,500 feet) are constructed of bituminous asphalt paving approximately 40'-50' wide with non-functioning, deteriorated sidewalks and bituminous curb. UE evaluated the roadway surface conditions of the neighborhood roads in accordance with Road Surface Management System (RSMS) standards in March 2021. Condition assessment forms are



2.4.3. Drainage System

provided (Appendix H). RSMS condition ratings ranged from 40 to 60 meaning the roads have deteriorated to a condition beyond maintenance overlays and reconstruction is recommended (Figure 2C). The road profile and crown has regressed so that they do not effectively convey/drain stormwater in many areas. The areas with the poorest RSMS condition ratings were in the northeast portion of the site and corresponded with areas of high groundwater and peaty materials and areas with most severe drainage issues identified during public input.

The existing drainage includes five (5) outfalls that discharge the Little River directly (3) or to a wooded wet area on the east side of the neighborhood (2). Surface runoff generally flows radially away from the center of the neighborhood to each existing drainage outfall. The Little River flows south along the west side to the neighborhood toward the Exeter River and receives stormwater from the west and north portions of the neighborhood. The wooded wet area on the east side of the neighborhood that receives stormwater from the central/east portion of the neighborhood flows south to a stone culvert railroad crossing and ultimately discharges to the Little River at a location upstream of the neighborhood (Figure 1A).

There are few catch basins to effectively collect stormwater given the wide roadway impervious area (40'-50' wide) in the neighborhood compared to other neighborhood streets in Town and has limited/no outfall stormwater treatment. Improvements to the stormwater system and providing a location for residents to discharge their sump pumps was the highest priority identified during public input meetings #1 and #2. UE visually evaluated the condition of the existing neighborhood drainage infrastructure and inspection reports and photographs are provided (Appendix I). Description of the drainage components are grouped below by each outfall.

<u>Outfall #1:</u> The drainage system that conveys stormwater to this outfall includes one (1) precast concrete catch basin and drain manhole that collects stormwater from the northwest portion of the neighborhood and outfalls to the Little River. The structures appeared to be serviceable condition, but the outfall pipe was observed hanging over the stream embankment. The outfall pipe also appeared to have a reverse slope and did not appear to be functioning properly (photo right). During public participation, residents identified drainage issues in this catchment indicating that improvements are needed to effectively collect and convey stormwater in this area.

<u>Outfall #2:</u> The drainage system that conveys stormwater to this outfall includes one (1) block drop inlet that collects stormwater from the southwest portion of the neighborhood and outfalls overland to the Little River. The catch basin structure was in poor condition with limited cover over the CMP outlet pipe and erosion was observed downstream of the outfall due to insufficient scour protection (photo right). During public participation, residents identified drainage issues in this catchment indicating that improvements are needed to effectively collect and convey stormwater in this area.



<u>Outfall #3:</u> The drainage system that conveys stormwater to this outfall includes one (1) block drop inlet that collects stormwater from the southeast portion of the neighborhood and outfalls to a wet area along the east side of the site. The catch basin structure was in poor condition with limited cover over the outlet pipe (Appendix I). During public participation, residents identified drainage issues in this catchment indicating that improvements are needed to effectively collect and convey stormwater in this area.

<u>Outfall #4:</u> The drainage system that conveys stormwater to this outfall includes one (1) block drop inlet (photo right) that collects stormwater from the east-central portion of the neighborhood and outfalls to a wet area along the east side of the site. The catch basin structure was in poor condition with limited cover over the outlet pipe and surcharged outlet conditions (Appendix I). During public participation, residents identified drainage issues in this catchment indicating that improvements are needed to effectively collect and convey stormwater in this area.



<u>Outfall #5:</u> The drainage system that conveys stormwater to this outfall was the largest in extent, appeared to be in the best condition, and appeared to be the only potentially salvageable site drainage infrastructure. It generally consists of 4' precast concrete diameter and brick catch basins with 12" PVC, HDPE, RCP, and CMP pipes in serviceable condition, but pipe conditions should be confirmed with CCTV and may be undersized. Outfall #5 is 15" HDPE that is hanging over the Little River embankment with limited outlet protection (photo right).



2.4.4. Water System

The neighborhood is serviced by Town municipal water that is understood to be composed of approximately 5,500 feet of 8" AC pipe. The Town's *Public Water System Asset Management Plan* by Tata & Howard, May 2015 (Water Asset Management Plan) identified the Westside Drive Neighborhood as an area with potentially corrosive soils and that "the structural integrity of AC water mains can deteriorate over time, thereby becoming sensitive to pressure fluctuations or nearby construction activities. In addition, external influences such as soil type and high groundwater can corrode AC mains, thus reducing the strength further" (excerpts Appendix J). Since issuance of that plan, the Town has reported that water breaks have been increasingly problematic in the neighborhood which may be due to corrosivity of the soils and high groundwater conditions observed during this study. Future infrastructure construction activities in the Westside Drive Neighborhood may exacerbate existing reported water break issues.

2.4.5. Private Utilities (electric, cable, gas)

The Neighborhood is serviced by overhead electric/cable and underground gas. Representatives from those utilities said that they were not aware of any major planned utility upgrades in the Neighborhood. However, it is likely that select private utility relocation/replacement may be necessary during major municipal infrastructure work in the Neighborhood.



2.5. Ownership

The neighborhood is served by Town-owned public streets and utilities (water, sewer, and drainage), private utilizes (gas, electric, and cable), with privately-owned single-family lots/homes. Property boundaries shown on the UE's figures and appendices is based on Geographical Information System (GIS) and other information provided by the Town. Boundary survey and roadway Right-of-Way (ROW) determinations were outside the scope of this work, but the following is our understanding of some of the property ownership constraints that may impact future infrastructure improvements and warrant future investigation:

<u>Roadways:</u> It is understood that the existing roadway ROW is 50' wide. However, the limit of pavement approaches 50' wide in some areas so future roadway construction activities may impact areas outside the existing ROW. Furthermore, the reference for the assumed ROW limits (from the centerline, etc.) should be considered/defined relative to possible changes future pavement edge/limits and utility relocations. Therefore, a ROW determination and survey is recommended to be included as part of future phases of the work and temporary construction easements may be necessary.

Drainage Outfalls: It is understood that the Town does not have specific drainage easements for drainage infrastructure that extends outside the roadway ROW limits. This is of particular importance for the drainage outfall pipes and aprons that extend radially from the neighborhood streets. Although we understand that the Town may have a prescriptive easement along existing pipe alignments, most of the existing drainage was identified as poorly functioning and likely in need of replacement and may not be ideally located. It is recommended that the Town obtain drainage easements as part of future phases of work and include consideration for drainage relocation and expanded outlet protection and/or treatment (if feasible and appropriate).

2.6. Environmental Assessment and Little River Flood Stage

The 100-year flood stage of the Little River was reviewed to evaluate its impact to the functionality drainage infrastructure. The Westside Drive Neighborhood abuts a section of the Little River that was included in a 2018 FEMA FIRM Map Revision associated with removal of the Great Dam in Downtown Exeter and includes revised stage/flow information of varying recurrence frequency (Appendix K & L). The NGVD elevations reported in the FEMA document were corrected on the provided drainage profiles (discussed later) by 0.76' to account for the lower NAVD88 datum used by the Town. Environmental review reports, pollutant loading calculations, and comparison of stormwater treatment alternatives were outside the scope of this evaluation and should be included in future phases of the work as appropriate. It is anticipated that additional basis of design evaluations required to satisfy the requirements of future NHDES stormwater funding will be completed near the beginning of the next phases of the work and the 30% design.

3. Summary of Findings and Identified Project Needs

3.1. Summary of Findings

The evaluations performed during this study and described in Sections 1 and 2 identified the following limitations and infrastructure deficiencies/improvements that should be considered in planned capital improvements plan for the Westside Drive Neighborhood:

- 1. Neighborhood-wide drainage improvements Public participation (Section 1.3.1) identified an increased need for overall neighborhood drainage improvements than what was previously understood and reinforced the need for infrastructure improvements to help residents manage their sump pump discharges. Stormwater treatment is proposed to be achieved through reduced impervious area and in-line treatment (deep sumps and hoods). Additional end-of-pipe treatment may be technically feasible at Outfall #2 but would require easements.
- 2. Closed drainage system extensions for sump pump management High groundwater conditions identified during this study (Section 2.3) prevents effective use roadside swales to help manage sump pump discharges. The roadside swale alternative was previously recommended in the CSO LTCP Update (2017) as the lowest cost option but is no longer considered a viable alternative based on the findings of this study. Similarly, the sump pump force main system alternative (Appendix M) is not considered viable because it would present logistical implementation challenges and would not address other neighborhood drainage needs. Therefore, closed drainage extension with sump pump service connections was found to be best feasible alternative to manage sump pump discharges because it would also help provide a framework for other needed drainage improvements.
- 3. Road reconstruction The road surface condition assessment (Section 2.4.2) indicated that the roads have deteriorated to the point where they need reconstruction so trench repairs should not be considered for infrastructure improvements. Road reconstruction would provide opportunity to re-establish the road profile/crown necessary to improve drainage and allow for mitigating the impact of peat underlying the road in the northeast corner of the neighborhood. The road base materials do not meet NHDOT specifications, but the geotechnical report (Appendix F) recommended that it may be possible to amend reclaim with added stone to improve road performance/durability. Reduction of the impervious road width would have additional environmental benefits of non-point source mitigation.
- 4. Water main replacement Replacement of the water main is recommended to be included in the project. The combination of corrosive soils, high groundwater, increasing frequency of water main breaks, risk of construction activities causing additional damage, roadway reconstruction to mitigate restoration costs, and economy of scale indicate that



including water main replacement as part of the capital improvements for the neighborhood is consistent with wise long-term utility planning. Due to corrosive soils either HDPE or poly-wrapped DI pipe is recommended.

3.2. Roadway Restoration Alternatives

Two roadway restoration alternatives were considered based on the feedback from the Public Information Meeting #1 to encourage traffic calming along the Westside Drive perimeter road and incorporate the Town's desire to reduce non-point nutrient stormwater sources to the Great Bay Estuary. Schematics of these alternatives are provided (Figures 3A and 3B) and include the following:

- Alternative #1 Reduced Roadway Width and Perimeter Sidewalks
 - Approximately 3,800' of perimeter sidewalks and new curb. The paved roadway travel way would be reduced to 24' in these areas.
 - Interior roads without sidewalk (approx. 1,700') paved roadway width would be reduced to 28' and are wider than areas with sidewalks to help facilitate pedestrian safety.
 - Engineer's Opinion of Probable Cost (2024) = \$6,300,000 (cost includes other utilities discussed later)
- Alternative #2 Reduced Roadway Width with Select Sidewalk Improvements
 - Approximately 600' of sidewalk would be replaced at the northwest corner of the neighborhood where sight distance for traffic is limited.
 - All roads (approx. 5,500') paved roadway width would be reduced to 28' wide. This proposed width includes an additional 4'-6' beyond typical 11'-12' travel lanes to accommodate neighborhood pedestrian safety needs identified during public input.
 - Engineer's Opinion of Probable Cost (2024) = \$6,000,000 (cost includes other utilities discussed later)

These alternatives were presented at the Public Information Meeting #2 for feedback from the public. There was mixed feedback about the proposed road width change and how it would affect the use of the roadways for children playing and existing on-street parking, but consensus that additional front yard green space would be appreciated and that provisions for pedestrians should be included. UE has also observed that the many residents walk the neighborhood during our site visits and recommend that perimeter sidewalks (Alternative #1) be incorporated into the project if budgets allow. Pedestrian safety is considered in both alternatives, but the addition of a perimeter sidewalk would improve the overall project functionality and help mitigate resident's concerns about pedestrian safety.



4. Recommended Basis of Design

UE's recommended basis of design incorporates the consensus of the Neighborhood Meeting (Sidewalks – Alternate #1 and improved drainage) while meeting the goals of I/I reduction, stormwater treatment, and complete asset renewal. The basis of design includes the following:

4.1. Roadway Improvements

Recommended roadway improvements include:

- Roadway reclamation incorporating supplemental stone (28' wide). Travel way reduced by approximately 15 to 25 feet.
- Strip existing pavement/sidewalks along roadway edges and restore with loam and seed (~22' total including both sides).
- 4" bituminous pavement (24' wide) on streets with sidewalk.
- 3,800' of curb and concrete sidewalk (5' wide).
- 4" bituminous pavement (28' wide to accommodate pedestrians) on interior streets without proposed new sidewalk.
- Regrade/re-establish road profile and crown to improve drainage.
- Mitigate the impact of poor subgrade materials by removal or with other technologies (such as geotextile) and approach should be refined during final design.

4.2. Municipal Water Improvements

Recommended municipal water improvements include:

- Install approximately 5,500' of new 8" watermain. The new main should be wrapped with polyethylene or be composed of non-corrosive materials to mitigate the corrosive soils reported to exist in the neighborhood.
- Replace approximately 90 water services to the ROW.
- Install approximately 8 hydrant assemblies.
- Provide temporary water during construction to mitigate the risk of water breaks and facilitate water main replacement.

4.3. Drainage Improvements

Recommended conceptual drainage improvements are shown (Figures 4A & 4B) and include:

- Install approximately 1,800' of roadway perimeter underdrain in the northeast corner of the neighborhood where high groundwater (above the road surface) was observed.
- Perform stormwater hydraulic modeling to confirm drain sizing. The following was assumed for the Engineer's Opinion of Probable Cost (Appendix N):
 - Approximately 1,700' of 12" HDPE drain. Consider using perforated drainpipe to help mitigate high groundwater conditions.
 - Approximately 1,000' of 15" to 24" HDPE drain. Consider using perforated drainpipe to help mitigate high groundwater conditions.



- Approximately 35 new drain structures to collect stormwater more effectively in areas where drainage issues were identified. Structures to incorporate 4' deep sumps where feasible and consider incorporating other in-basin technologies (such as separators) to help capture pollutants prior to discharge.
- Replace two (2) drainage outfalls on the west side of the neighborhood (Outfalls #1 & #2) and improve outlet protection. Consider incorporating end-of-pipe stormwater treatment at Outfall #2 since site conditions at this location may allow the addition of treatment (such as rain gardens). Conceptual drainage profiles have been provided to evaluate the feasibility of avoiding utility conflicts and showing the 100-year flood elevation at these sites (Figures PRO#1 and PRO#2).
- Replace one (1) drainage outfall on the east side of the neighborhood (Outfall #3), eliminate the poorly functioning Outfall #4, and direct drainage to the reconstructed Outfall #3. Conceptual drainage profiles have been provided to evaluate the feasibility of avoiding utility conflicts at these sites (Figures PRO#3 and PRO#4).
- Re-use the existing drainage infrastructure that conveys stormwater to Outfall #5, but confirm the suitability of reuse with CCTV inspection and hydraulic stormwater modeling during final design.

4.4. Private I/I Mitigation

Recommended private I/I mitigation improvements include:

- Install approximately 1,400' of 8" PVC/HDPE sump collectors on interior roads connected to the drainage system with a drop inlet at each end.
- Provide sump pump drain service connections to drain lines at the edge of ROW for interior properties (50 assumed).
- Homeowner would be responsible to connect sump pump discharge to the drain service provided by the Town.
- It is assumed and topography allows most properties around the perimeter of the neighborhood to discharge sump pumps towards the back of their lots.

4.5. Sewer Improvements

Inspected sewers were in good condition and no sewer improvements are recommended except where utility conflicts are encountered. However, it is recommended that all sewers be CCTV'd in a future phase to locate laterals for utility planning and the condition of the sewer mains should be also confirmed at that time.



4.6. Engineer's Opinion of Probable Cost

The \$6,200,000 Engineer's Opinion of Probable Project Construction Cost for this alternative is provided for anticipated 2024 construction. We have also provided an opinion for roadway improvement Alternative #2 for comparison (Appendix N). For planning purposes, the cost of the work for each utility is approximately:

- Roadway with Sidewalk \$2,200,000 (roadway also required for drainage imp.)
- I/I and Stormwater \$1,500,000
 Water \$2,600,000
- TOTAL \$6,300,000

The eligibility determination may differ from the breakdown provided above and should be refined with final design. Also note that the opinion of costs is higher than those that were previously provided to account for inflation observed in recent bids and also include a 3.5% annual escalation factor to help the Town budget for anticipated 2024 construction.

4.7. Anticipated Permitting

The following permits are anticipated for the work pending the findings of future wetlands delineation:

- NHDES wetlands permitting for outfall improvements
- NHDES shoreland permit
- NHDES alteration of terrain permit by rule (pending final construction scope)
- NPDES construction general permit

5. Recommended Next Steps

The following is recommended to advance the project toward final design and implementation:


- Present the findings and recommendations of this report in a public forum to satisfy the NHDES funding requirements and close the current CWSRF Loan.
- Pursue NHDES ARPA, CWSRF, and DWSRF funding opportunities for next phases of the work. The Town was selected for 2021 ARPA stormwater funding for phase 2 of this project and CWSRF may also offer principal forgiveness for eligible portions of the project cost. The following tasks are anticipated to take advantage of these funding opportunities:
 - Funding applications and environmental report
 - Update this basis of design report to incorporate NHDES Watershed Management Bureau requirements including:
 - Site characteristics (receiving water use, hydrologic soil group, impervious cover, land use, pre and post-construction pollutant loading estimates)
 - Receiving water flow and water quality data
 - Water quality improvements alternatives
 - Project schedule
 - Cost summary of selected alternative
 - Long-term operation and maintenance
 - Estimated pollutant load reductions


Advance final design including the following:


- Consider performing a roadway ROW determination to better define the extents and location of the existing ROW during final design.
- Confirm existing drainage easements and obtain easements for required drainage work outside the existing ROW. Include provisions for improved outlet protection and stormwater treatment and possible drain relocation during final design.
- Perform hydraulic stormwater modeling to confirm required stormwater improvements capacity/sizing during final design.
- Perform CCTV of sewers to confirm service locations and sewer main condition.
- Perform wetland delineations where wetland impacts are anticipated.
- Obtain necessary permits (Section 4.7) during final design.
- Perform a work session in the field and invite residents to review conceptual roadway layout prior to completing final design.





Figures

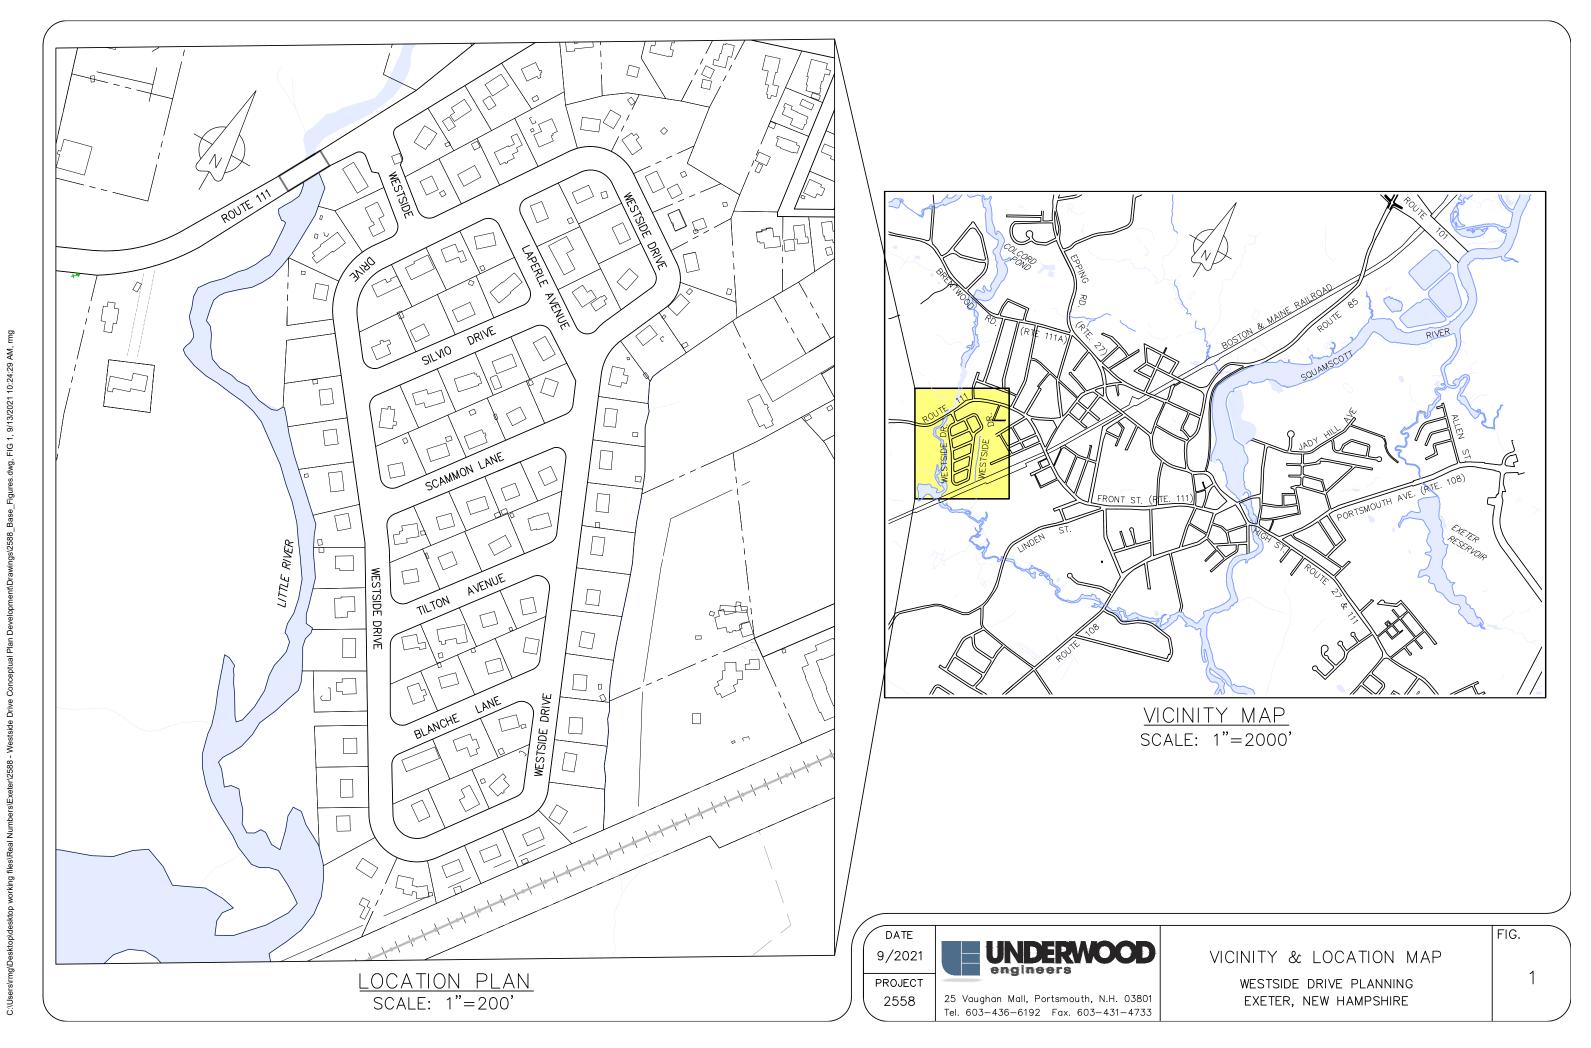

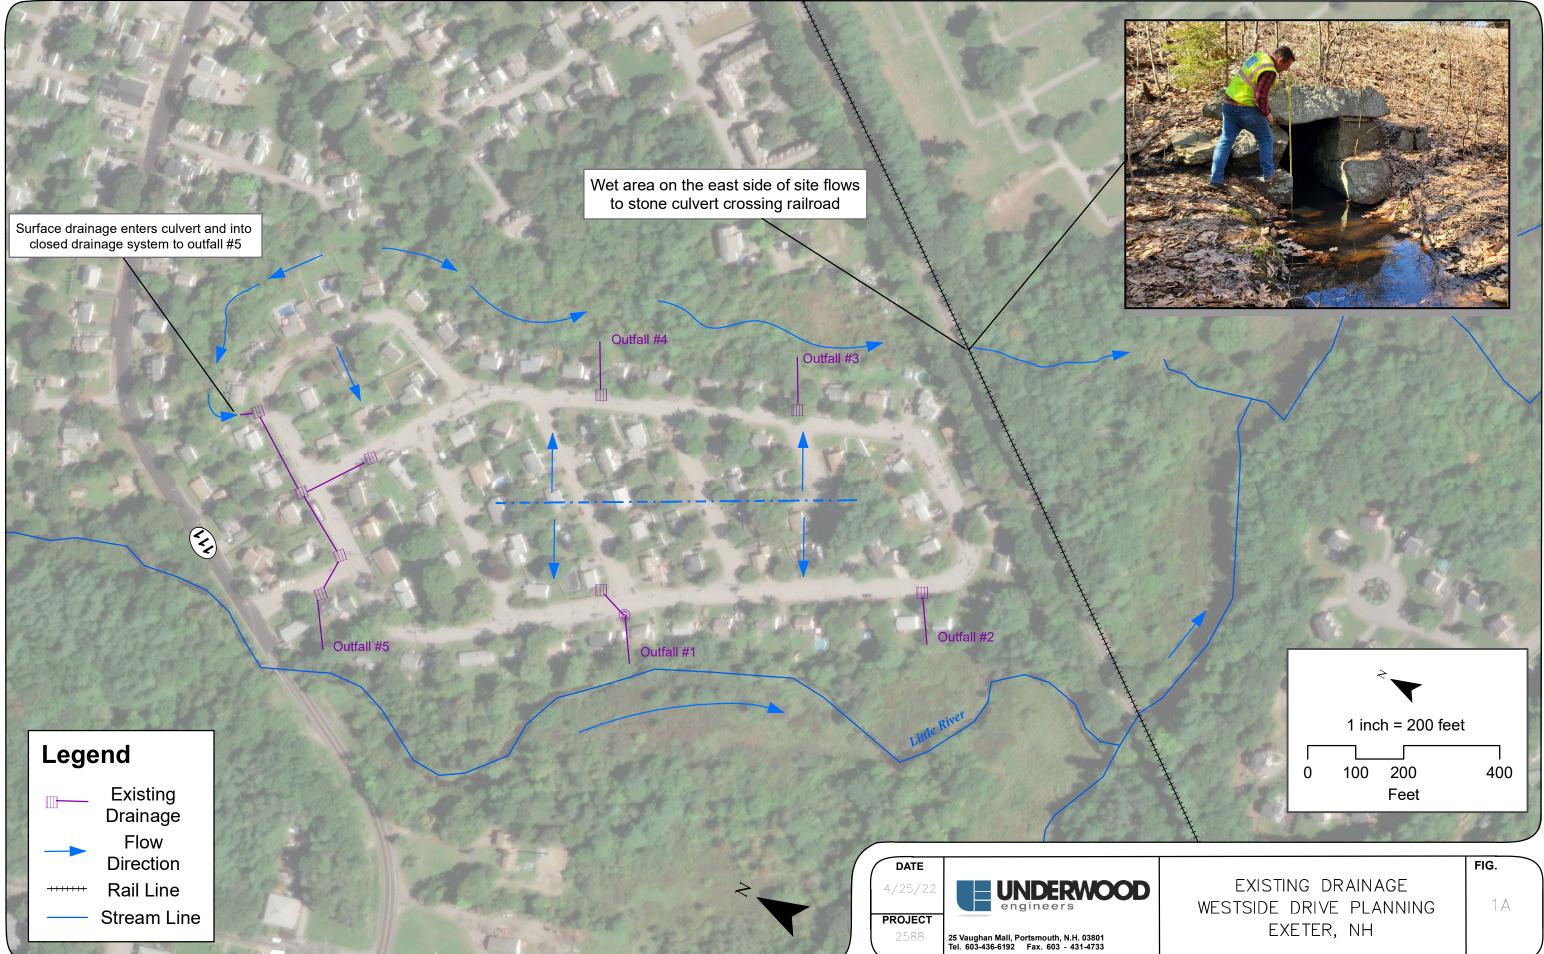


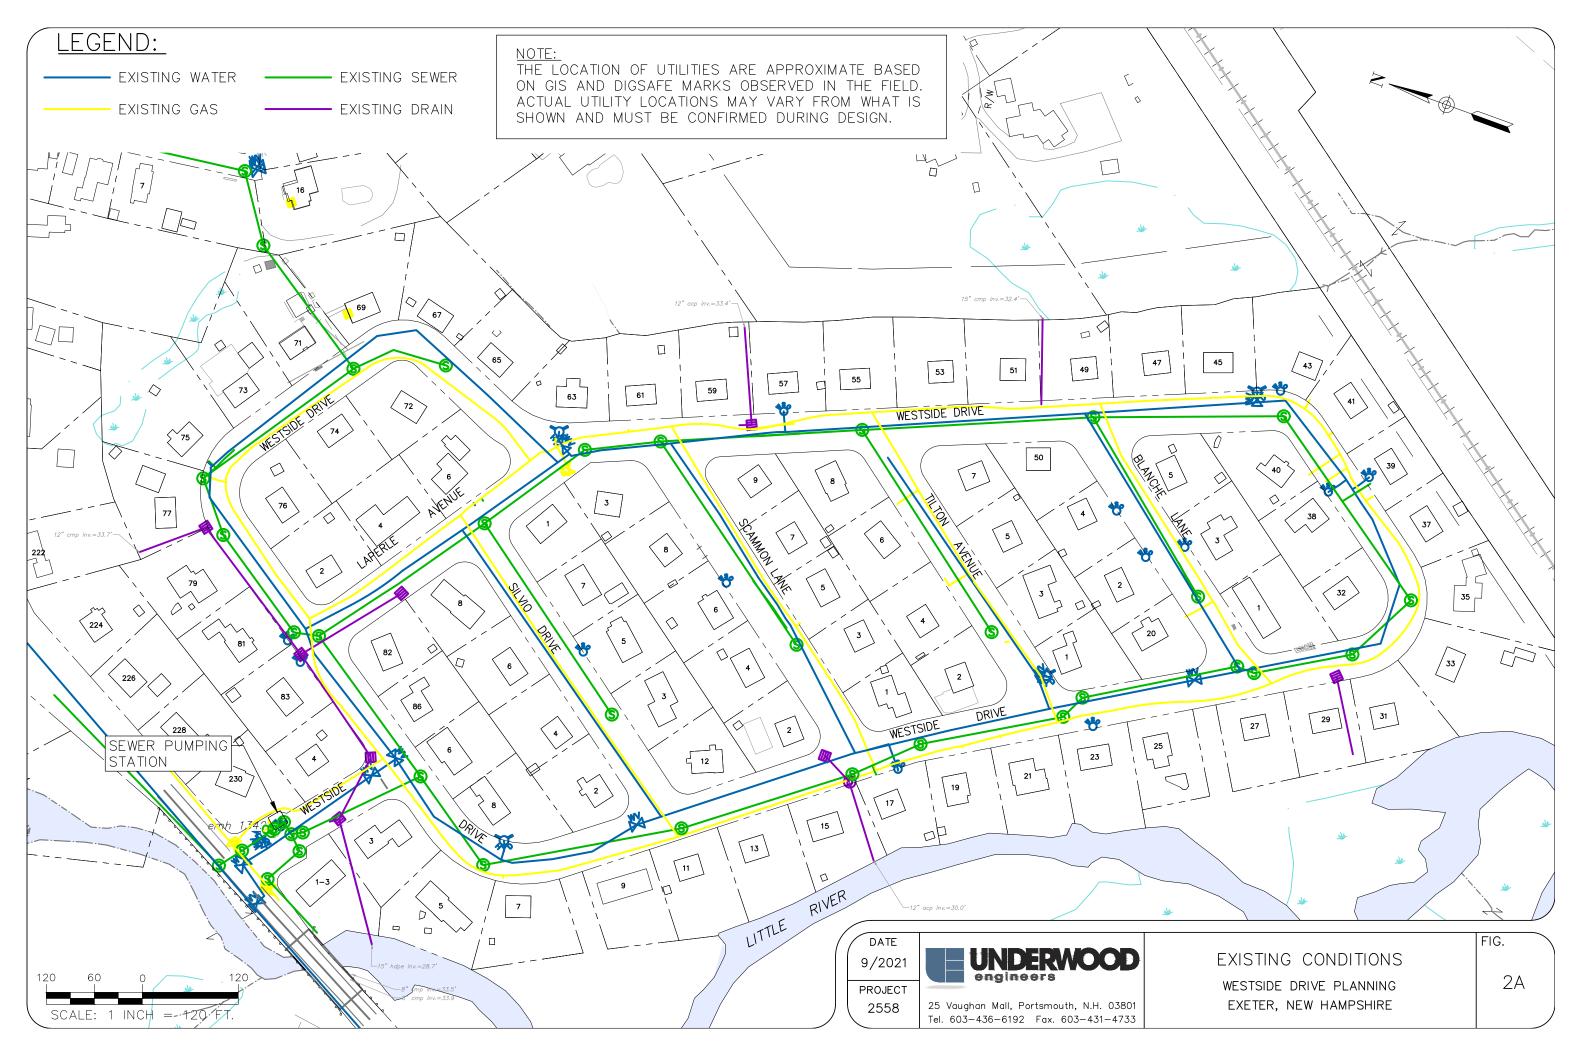

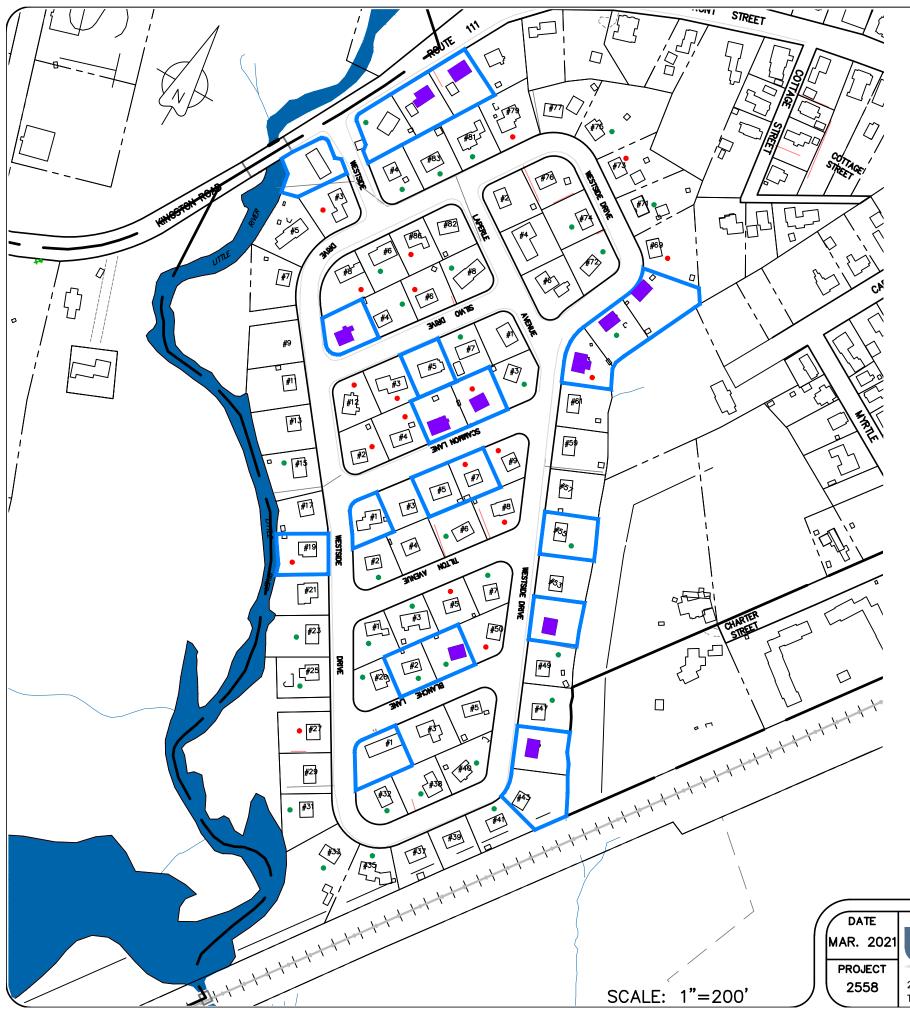

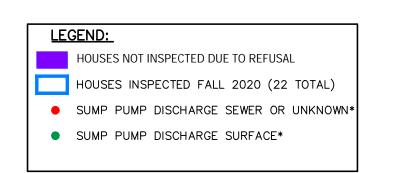


NOTE:

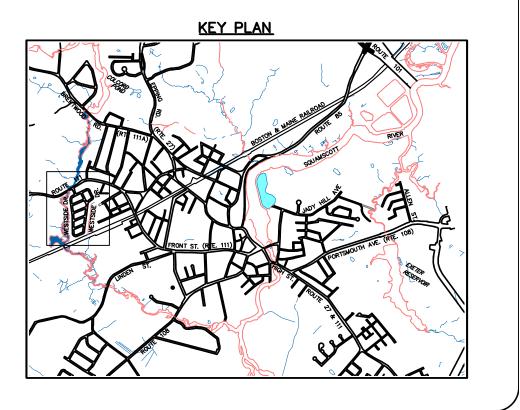






1. INFORMATION SHOWN WHERE INTERNAL INSPECTION NOT PERFORMED WAS BASED ON HOMEOWNER SURVEY.


HOUSE INSPECTION RESULTS	FIG.	
WESTSIDE DRIVE PLANNING EXETER, NEW HAMPSHIRE	2B	

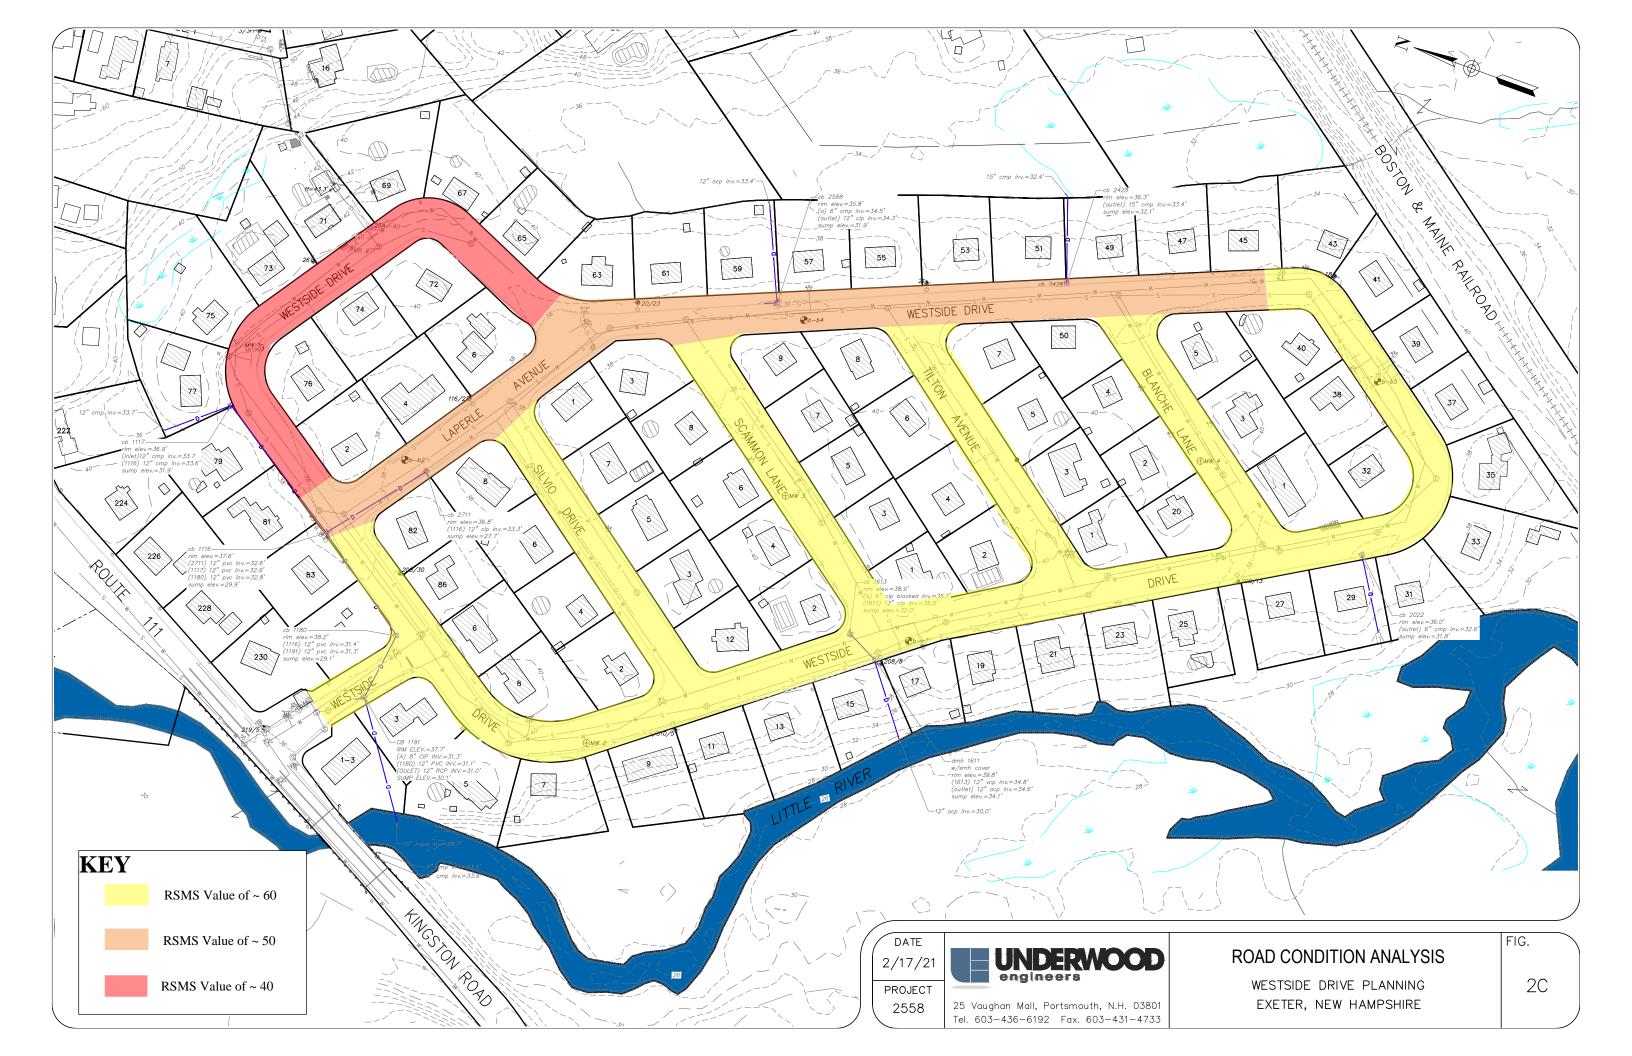

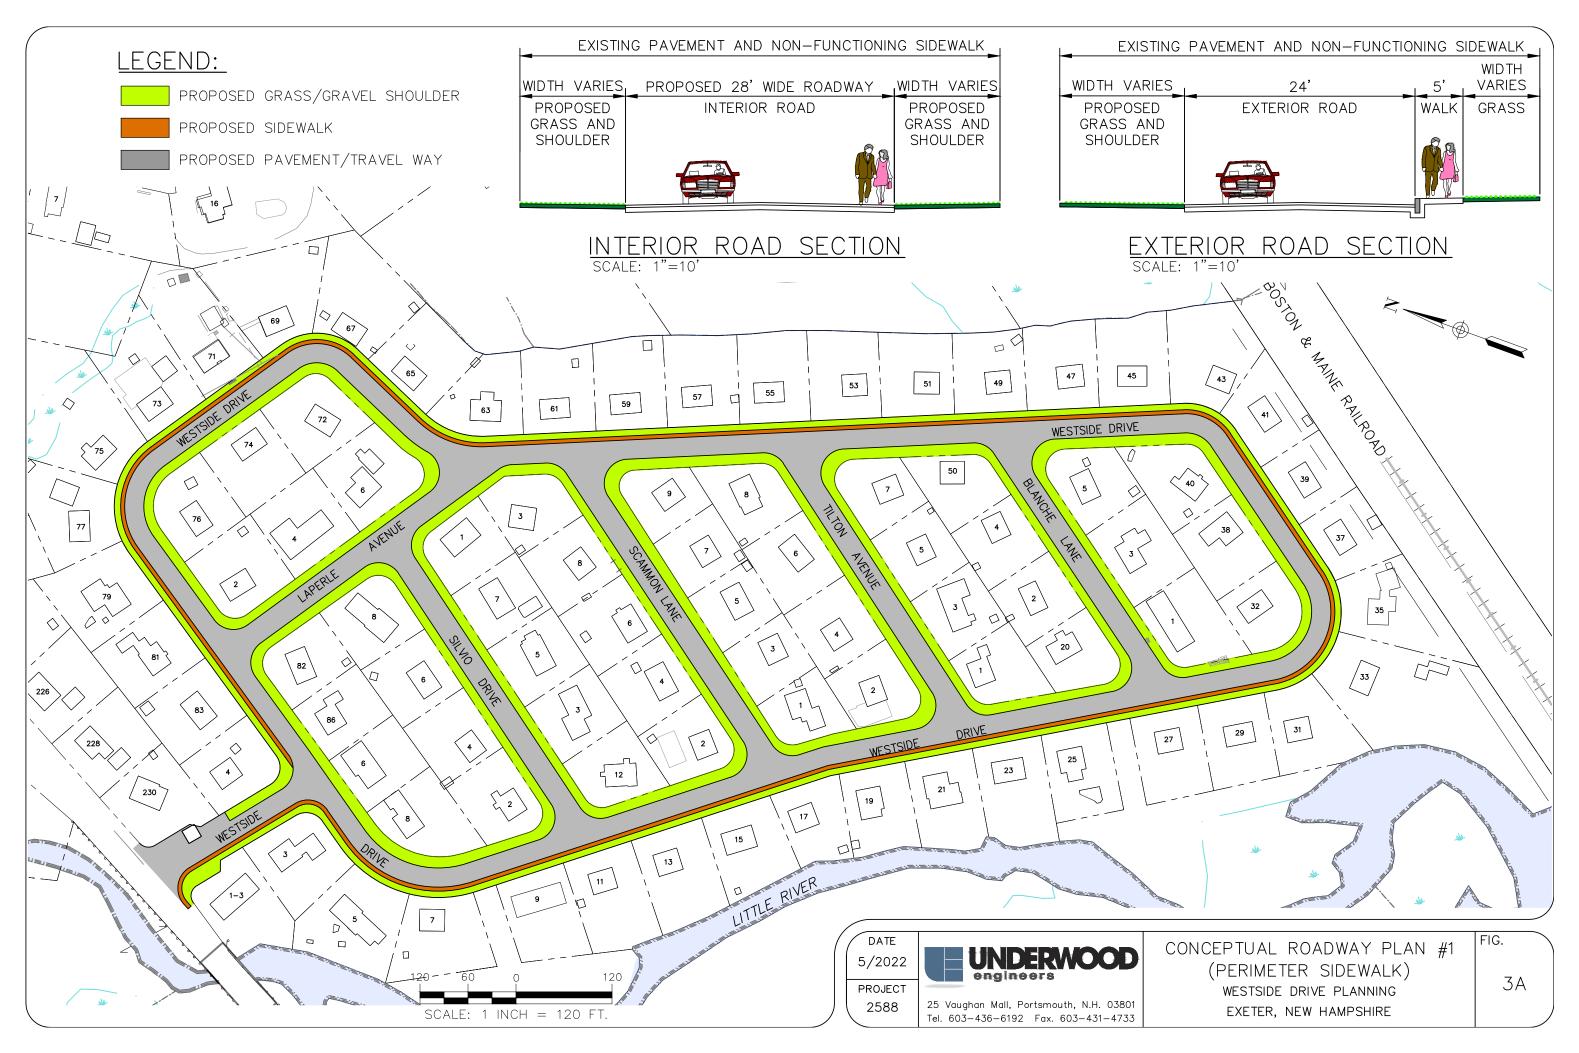

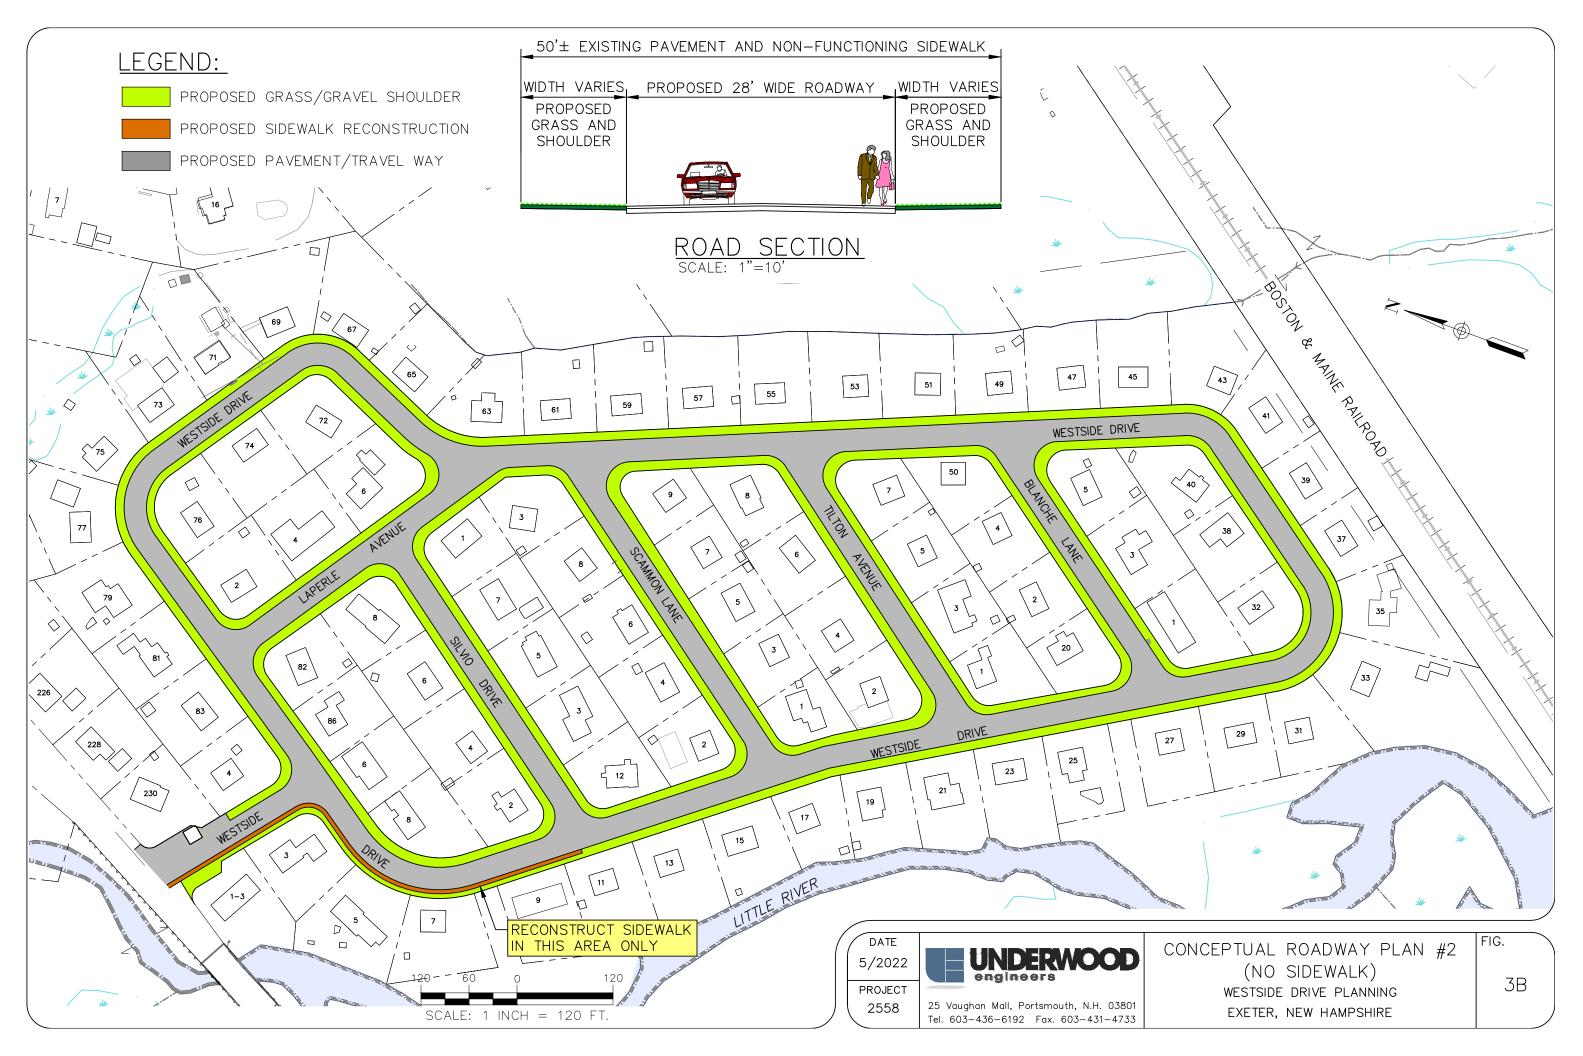

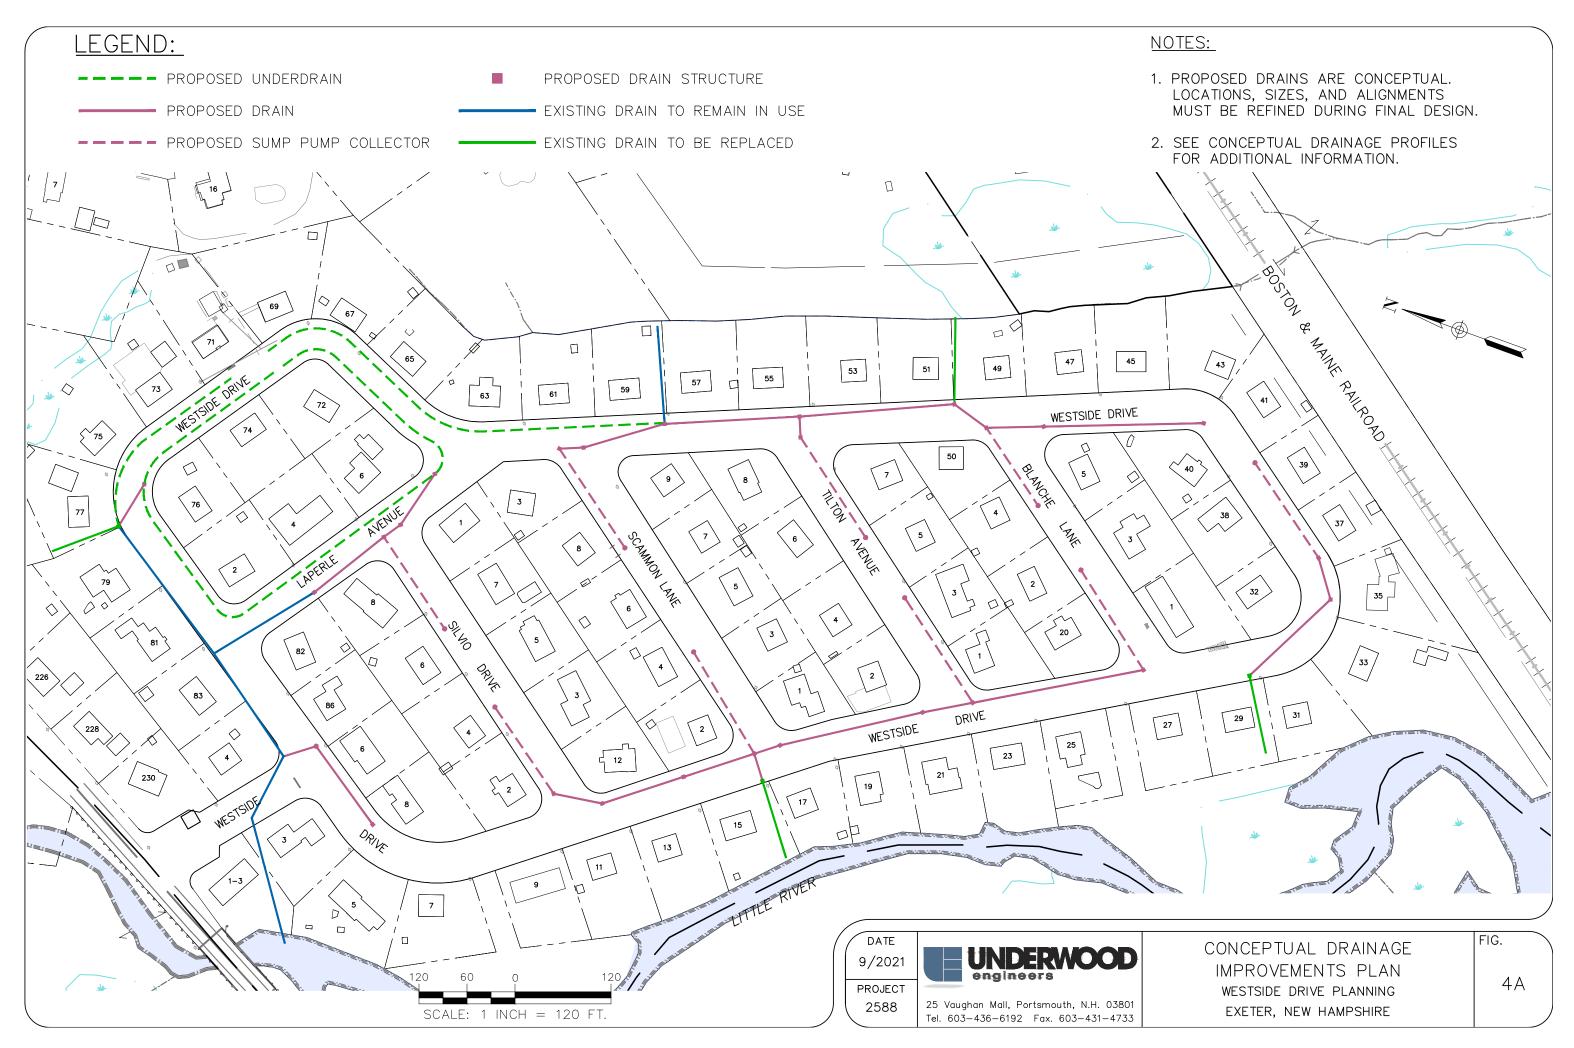

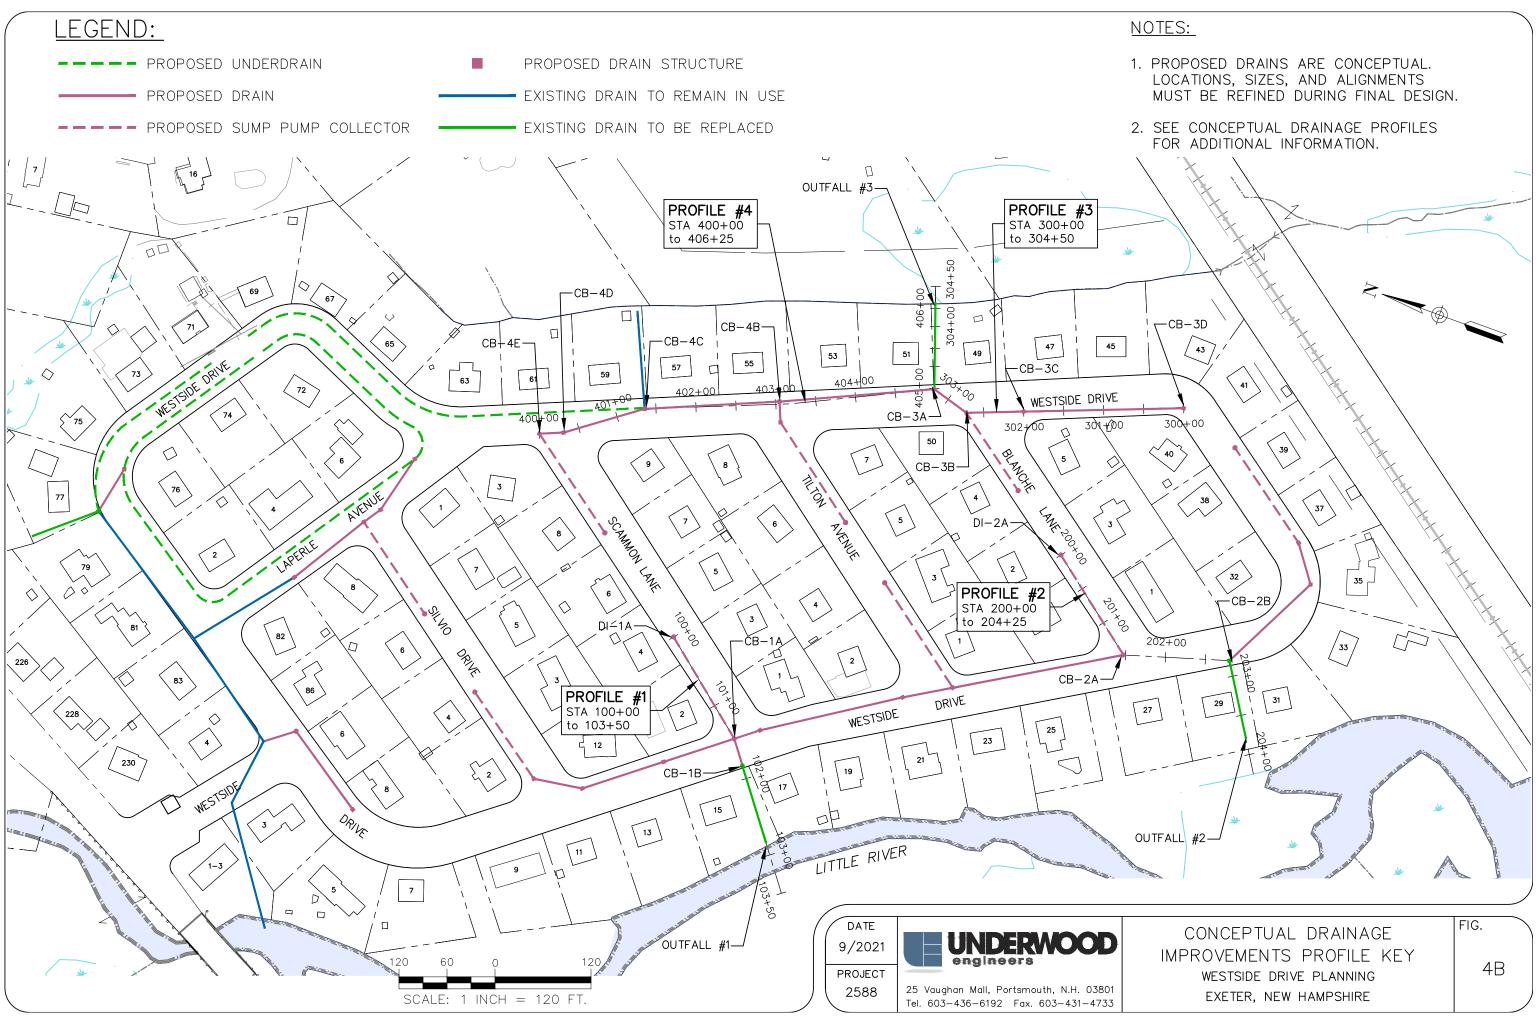




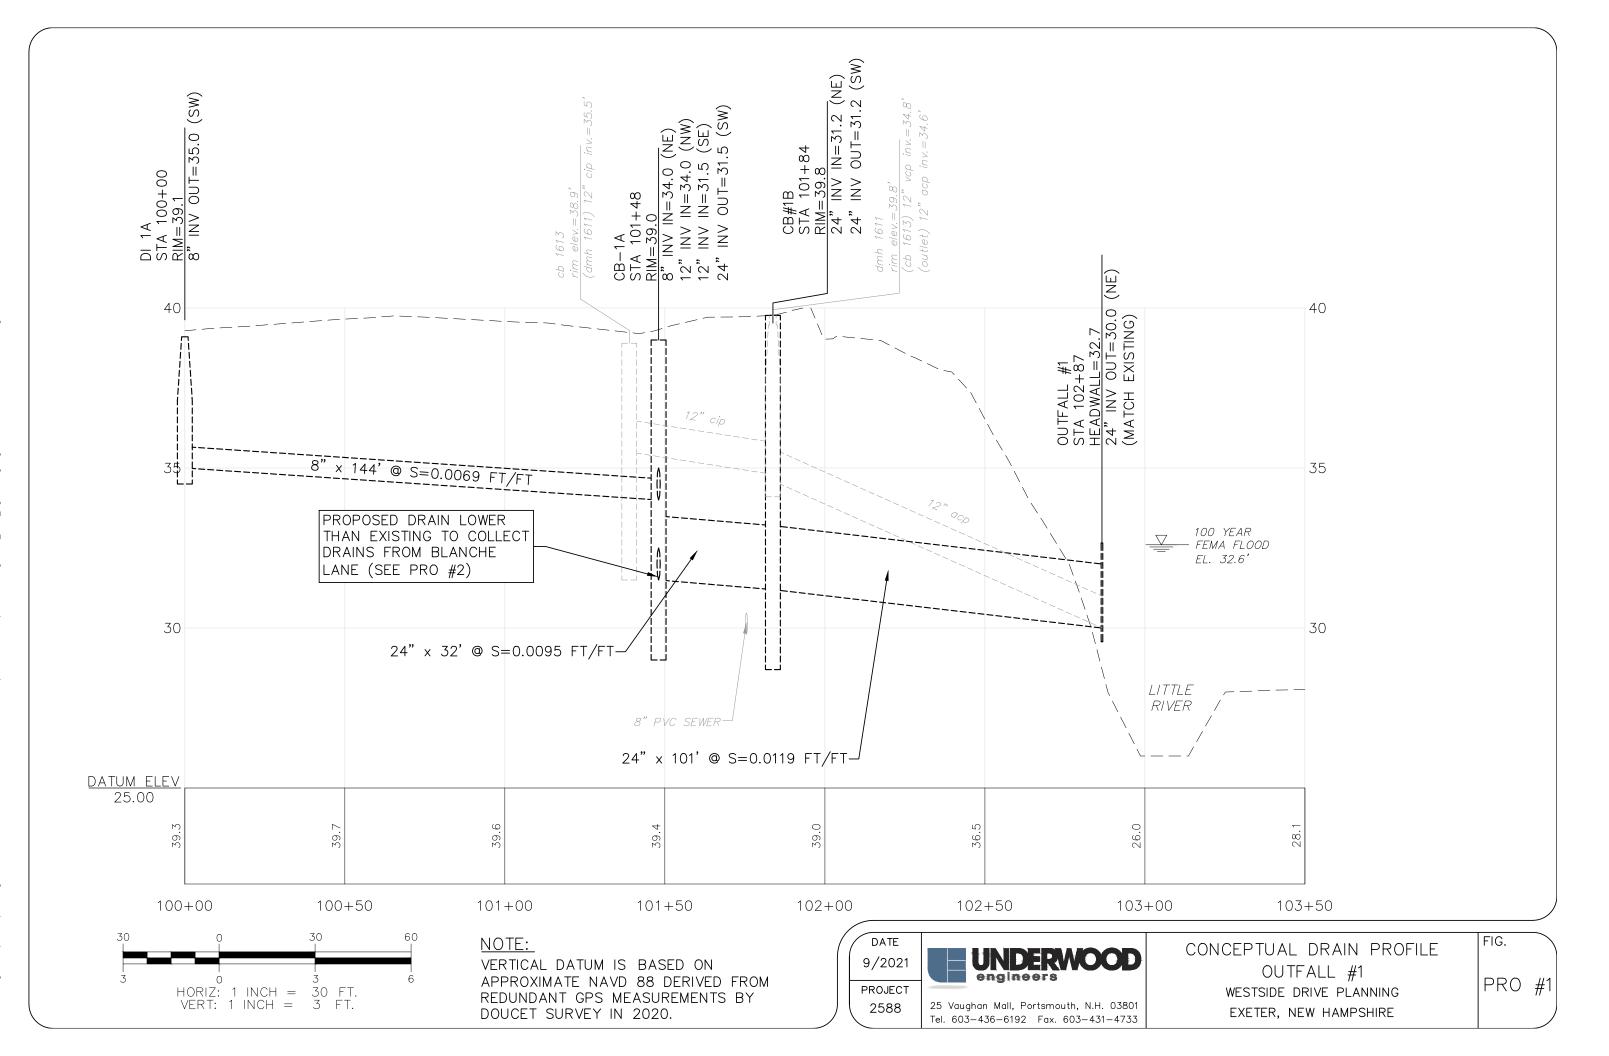


Fig PRO 1, 9/13/2021 10:33:16 AM, rmg łwg,

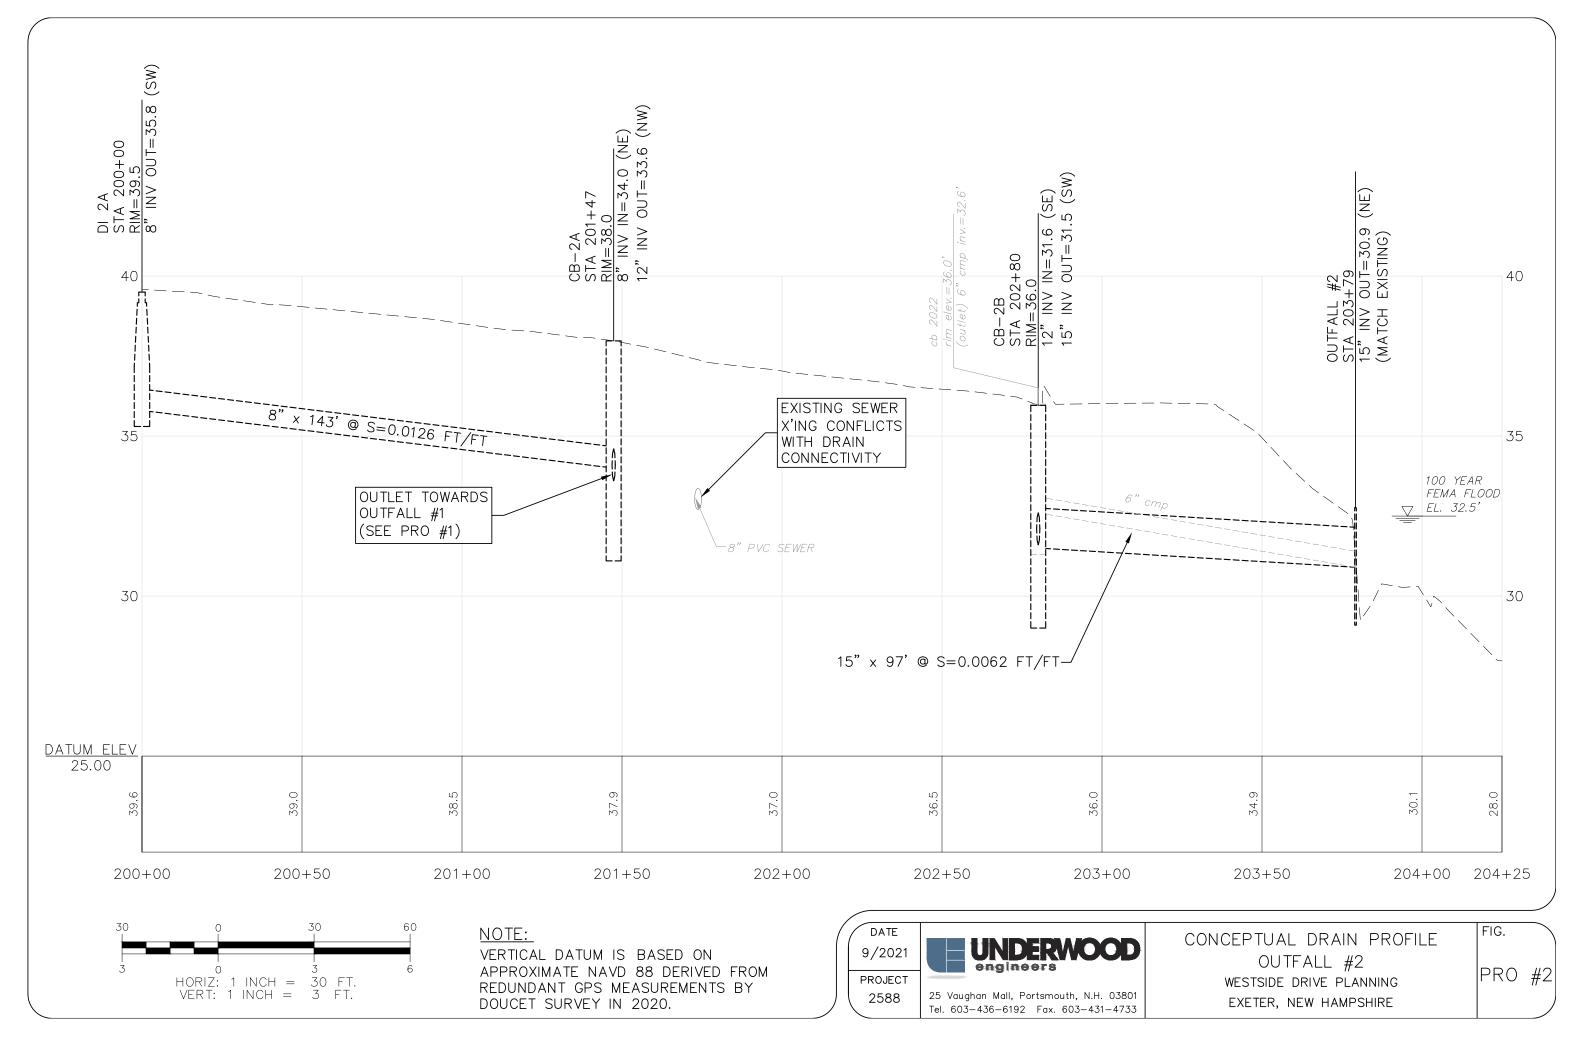

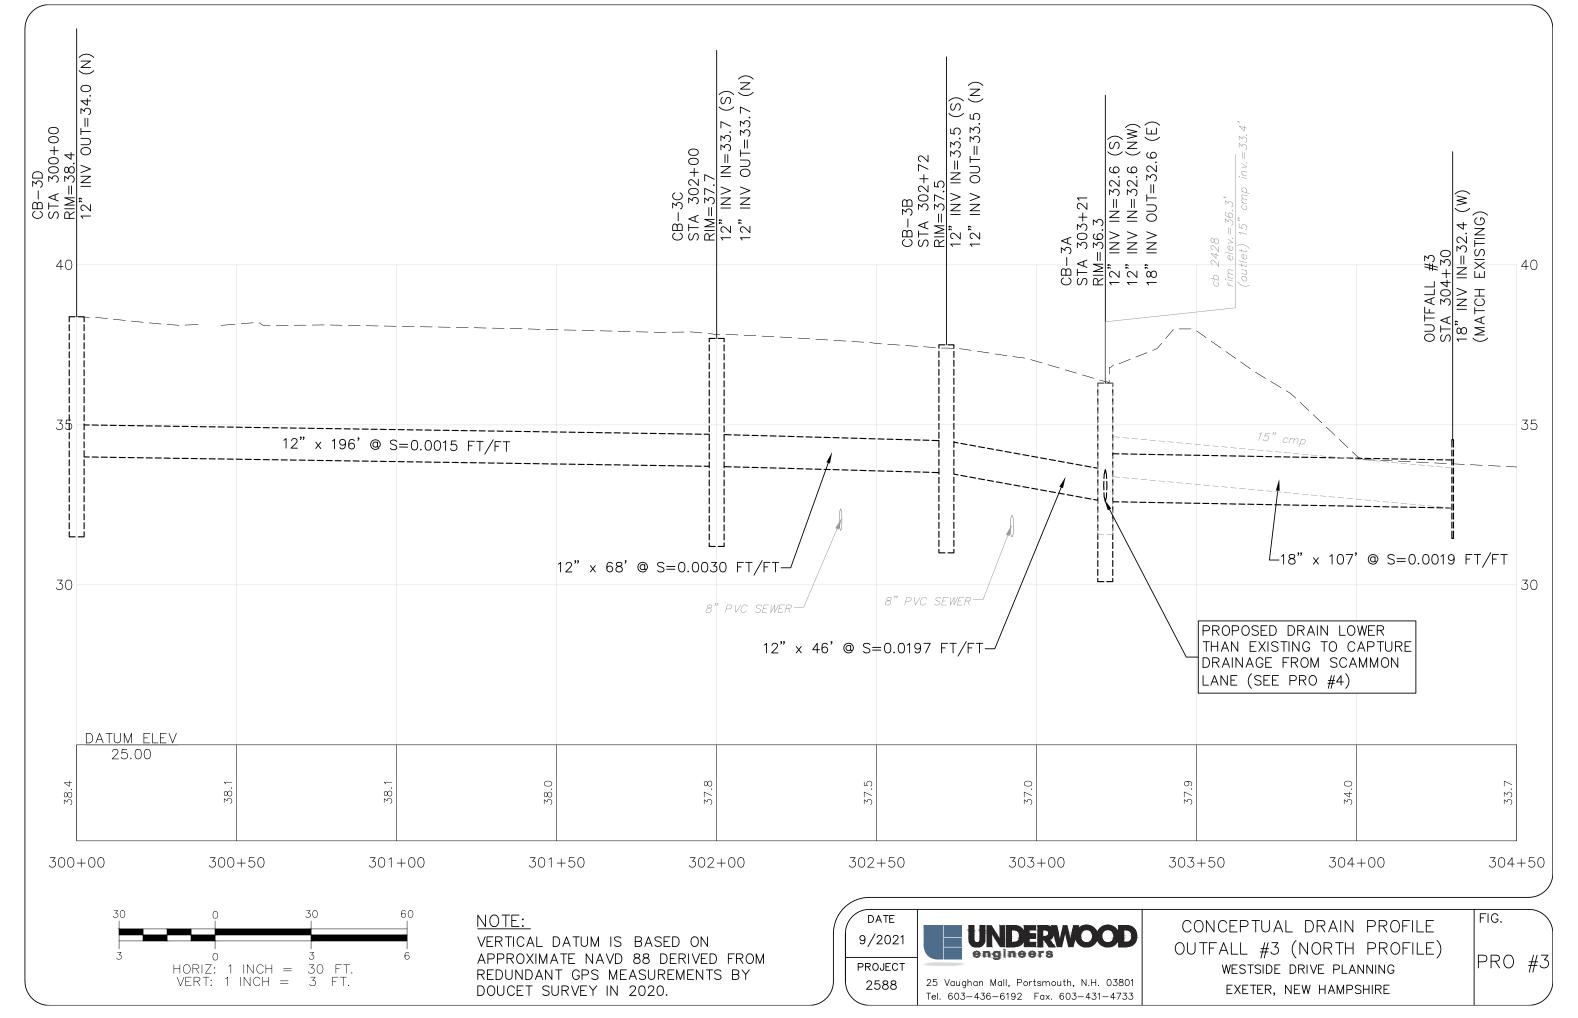

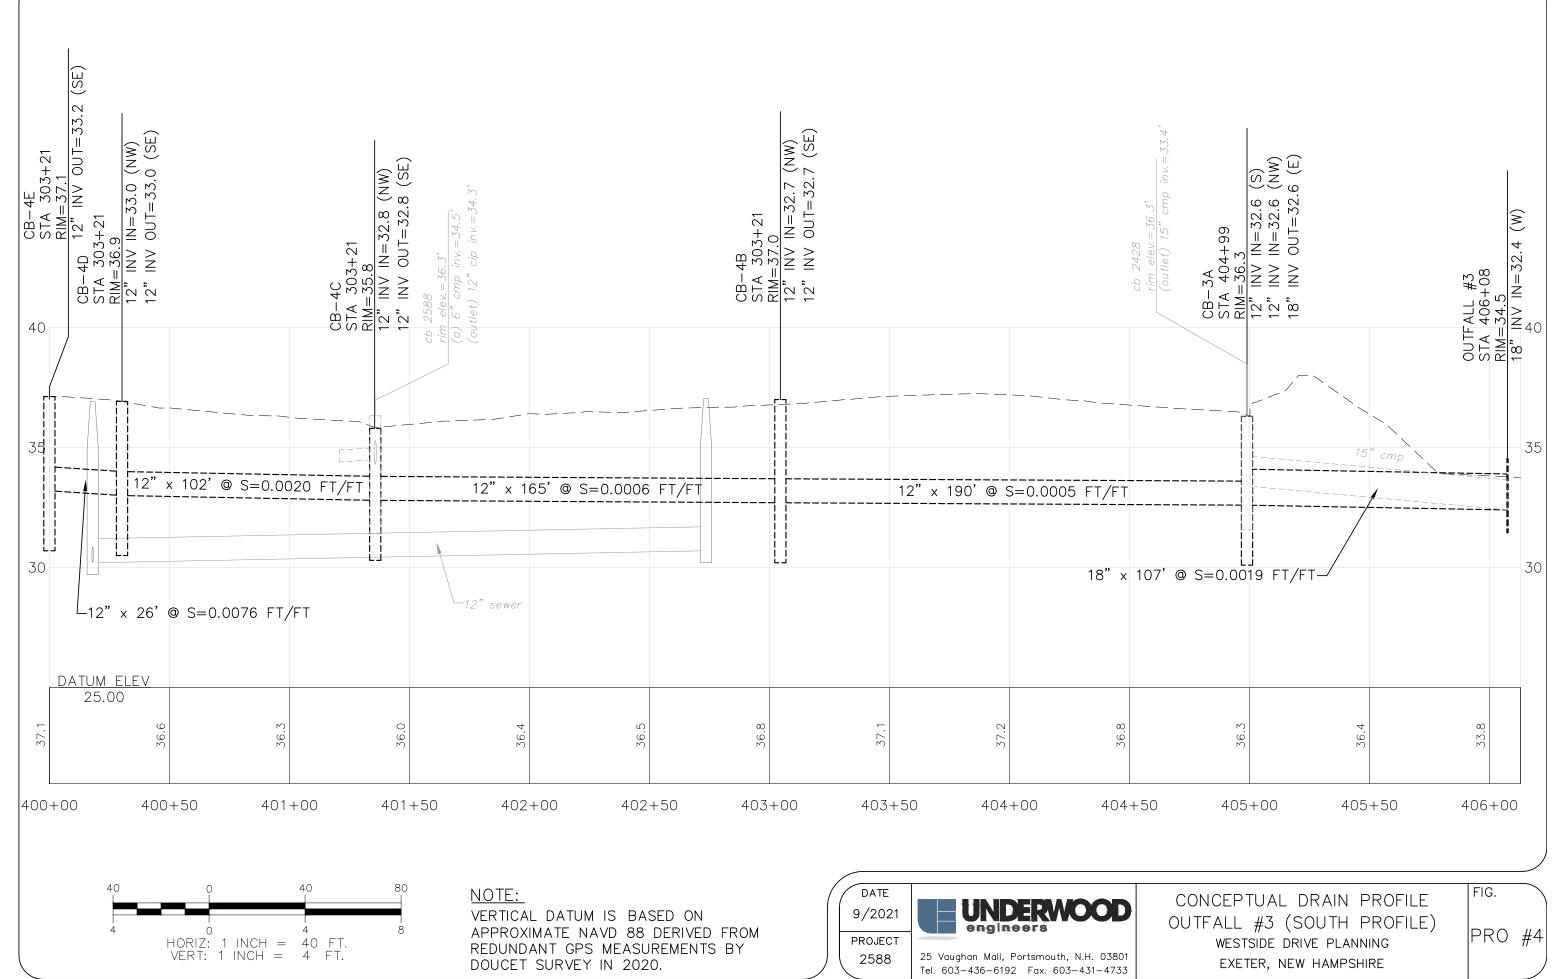

dwg, Fig PRO 4, 9/13/2021 10:36:05 AM, rmg

Appendix A Executed Report Phase Engineering Contract

ENGINEERING REPORT PHASE CONTRACT FOR PROFESSIONAL SERVICES FOR TREATMENT WORKS

TOWN OF EXETER, NEW HAMPSHIRE

This AGREEMENT made and entered into at <u>Rockingham</u> County, New Hampshire, this <u>3</u>⁻⁻⁻⁻⁻⁻⁻ day of <u>August</u> 2020, by and between Town of <u>Exeter, NH</u> hereinafter called the OWNER, <u>Underwood Engineers, Inc.</u> hereinafter called the ENGINEER.

WITNESSETH:

WHEREAS, the OWNER intends to examine the need, alternatives and cost of constructing Treatment Works including <u>develop a report phase preliminary design for the Westside Drive Neighborhood</u> that could be used as a tool for future I/I mitigation and project development. A detailed description of the scope of services is provided as Attachment A and a Certificate of Insurance is provided as Attachment B.

hereinafter called the PROJECT, and

WHEREAS, professional sanitary engineering services are required to prepare an engineering report, and

WHEREAS, such services are of a distinct professional nature and hence not subject to the bidding process,

NOW THEREFORE, in consideration of these premises and of the mutual covenants herein set forth, the OWNER hereby retains the ENGINEER to furnish the following engineering services in connection with the proposed PROJECT; and it is agreed by and between the OWNER and the ENGINEER as follows:

I. Services to be performed by the ENGINEER

A. The ENGINEER agrees to produce a complete and definitive Engineering Report to meet current division requirements and to perform any and all engineering incidental thereto. The detailed scope of the work is as outlined in the attached Plan of Study.

Δ.

B. Furnish to the OWNER two (2) copies of information needed for the acquisition of easements, site options for interceptor sewers within _____ calendar days after the Engineering Report has been approved by the New Hampshire Department of Environmental Services, Water Division, hereinafter called the DIVISION.

C. Furnish four (4) copies of the Engineering Report to the OWNER and two (2) copies to the DIVISION. Additional copies to be available at cost.

D. Prepare applications with supporting and associated documents for Federal, State and other grant or loan programs,

1. Assists the OWNER in securing grants or loans by State, Federal and other grant or loan agencies.

E. Provide the DIVISION with one copy of design calculations, work sheets, field notes, estimates and other data generated in preparing the Engineering Report in a form satisfactory to the DIVISION.

II. The OWNER'S Responsibilities

A. Assist the ENGINEER by placing at his disposal all available information pertinent to the PROJECT, including previous reports and other data relative to the reports.

B. Make provisions for the ENGINEER to enter upon public and private lands, municipal facilities and industrial establishments as required to perform work under this AGREEMENT.

III. Time of Completion

A. The ENGINEER agrees that he will submit to the DIVISION and the OWNER for approval after modification or revision as recommended by the DIVISION and agreed to by the ENGINEER the completed report within ______ consecutive calendar days following the acceptance of the contract by the OWNER, and deliver same to the OWNER within <u>30</u> calendar days following the date of final approval by the DIVISION.

B. It is agreed by the parties to this contract that failure by the ENGINEER to complete the work within the time stipulated under III, A, above may be considered sufficient basis for the debarment of the ENGI-NEER from the DIVISION'S Roster of Prequalified Engineers as provided for under New Hampshire Code of Administrative Rules Env-Wq 603.08, or the Assessment of liquidated damages as provided for under RSA 485-A: 4, XII.

IV. Compensation to be Paid the ENGINEER

A. Method of Payment - Amount of Fee

1. Payment to the ENGINEER, for services rendered, shall be according to the following schedule:

Monthly billing based on hours and rates by labor category with mark-up and incidental expenses in accordance with the attached fee schedule.

2. The OWNER agrees to pay and the ENGINEER agrees to accept for all services under this AGREEMENT, a fee not to exceed

Ninety Seven Thousand and Six Hundred

Dollars (\$97,600),

and the ENGINEER agrees that the work proposed is sufficient to satisfactorily complete the study and that the monies to be paid are adequate. The attached fee schedule with labor category, hours, hourly rate, markup, incidental expenses, and fees for special services, shall be the basis for billing for engineering services.

> a. The ENGINEER agrees that prior to submitting the report to the DIVISION for formal approval he shall make revisions in the report as recommended by the DIVI-SION and agreed to by the ENGINEER without additional compensation. After formal approval if it becomes necessary to update the report for reasons beyond the control of the ENGINEER, payment for such revision or revisions shall be made to

G: PROJECTS: HEXETER, NHINNUMBIN 2834 - Salem Street Area Utility Design/Westside Drive Proposal Exeter, Engineering Contract doc Exeter, Engineering Contract

the ENGINEER on a basis to be negotiated with the DIVISION.

V. Additional Covenants

A. The ENGINEER agrees to assign in active charge of this PROJECT for the life of the contract a Project Engineer who is a permanent employee of the ENGINEER and who is a "qualified sanitary engineer" as defined under the DIVISION'S "Rules and Regulations for the Prequalification of Consulting Engineers." The Project Engineer shall be*

Cole S. Melendy, P.E.

 See appended resume describing the candidate's qualifications for the assignment.

Any proposed change in identity of the Project Engineer on the PROJECT shall first be approved by the DIVISION before transfer of responsibility is made. Failure of the ENGINEER to abide by the above covenant is agreed to be sufficient basis for debarment of the ENGINEER from the DIVISION'S Roster of Prequalified Consulting Engineers as provided for under New Hampshire Code of Administrative Rules Env-Wq 603.08.

B. The ENGINEER agrees to be solely responsible for all bills or claims for payment for services rendered by others and for all services and materials employed in his work, and to indemnify and save harmless the OWNER, and all of the OWNER'S officers, agents and employees against all suits, claims or liability of every name and nature arising out of or in consequence of the negligent acts or failures to act of the ENGINEER or others employed by him in the performance of the work covered by this AGREEMENT.

C. The ENGINEER further agrees to procure and maintain at his expense such workmen's compensation insurance as is required by the statutes and public liability insurance in amounts adequate to provide reasonable protection from claims for bodily injury, death or property damage which may result from his performance and the performance of his employees under this AGREEMENT.

D. All documents, including original drawings, design calculations, work sheets, field notes, estimates, and other data shall remain the property of the OWNER and shall be transmitted to the OWNER in clean and orderly condition on demand; however, these may be left in the possession of the ENGINEER at the OWNER'S discretion. E. The ENGINEER shall not sublet, assign or transfer any part of the ENGINEER'S services or obligations under this AGREEMENT without the prior approval and written consent of the OWNER and the DIVISION, and the contract shall be binding upon and inure to the benefit of the parties, their successors and assigns.

IN WITNESS WHEREOF, the parties hereto have affixed their hand and seals at Rockingham

County, New Hampshire, the day, month, and year first above written.

ENGINEER:

By: <u>Keith A. Pratt, P.E., President</u> (Authorized Representative*)

Date: 7.30-20

By: <u>W. Steven Clifton, Vice President</u> (Authorized Representative*) Date: 7-30-2020

OWNER

By: <u>Russell Dean, Town Manager, Exeter, New Hampshire</u> (Authorized Representative*)

Date: 8/3/20

APPROVED: **

DEPARTMENT O	F ENVIRONMENTAL SERVICES
Water Division	Dennis D. Greene
Bv:	

(Authorized Representative) Date: _______

* Signatures should be supported by appropriate document.

It is agreed that as an act in furtherance of its statutory authority to approve engineering agreements for treatment works, the DIVISION's approval does not impose any contractual obligation or liability on the State of New Hampshire, the Department of Environmental Services or the Division.

GiPROJECTS/BXETER, NHNNUMB/N2834 - Salem Street Area Utility Design/Westslde Drive Proposal/Exeter.Engineering Contract docExeter.Engineering Contract

ENGINEERING REPORT PHASE CONTRACT For Professional Services for Treatment Works

Approved as to form:

At a meeting of the Partners/Directors of <u>Underwood Engineers</u>, Inc., held on ______,

at which all the Partners/Directors were present, except _

it was

VOTES: That all contracts may be signed by any one of the following:

Keith A. Pratt, President and W. Steven Clifton, Vice President

morra A true copy Attest: Colleen A, Morrow, Secretary/Treasurer

Place of Business: 25 Vaughan Mall, Portsmouth, NH 03801-4012

Page 4 of 4

Date of this Contract:

I hereby certify that I am the Clerk of <u>Underwood Engineers. Inc.</u>, that <u>Keith A. Pratt</u> is the duly elected <u>President</u>, and that <u>W. Steven Clifton</u> is the duly elected <u>Vice President</u>, and that the above vote has not been amended or rescinded and remains in full force and effect as of this date.

Collect a. Morrow

Clerk - Colleen A. Morrow, Secretary

ADDENDUM

TO PROFESSIONAL ENGINEERING SERVICES CONTRACT FOR TREATMENT WORKS

THIS ADDENDUM to the ENGINEERING CONTRACT FOR PROFESSIONAL SERVICES FOR TREATMENT WORKS (the "Agreement") made effective this ______ day of _______ 2020, by the Town of _______, New Hampshire, hereinafter referred to as the "Owner", and UNDERWOOD ENGINEERS, INC. hereinafter referred to as the "Engineer", a New Hampshire corporation with its principal place of business at 25 Vaughan Mall, Portsmouth, New Hampshire 03801-4012.

--- WITNESSETH ---

<u>RECITALS</u>

WHEREAS, the **Owner** requires, and the **Engineer** agrees to provide certain professional engineering services (the "Services") in connection with engineering design of treatment works (hereinafter referred to as the "Project") at <u>Westside Drive in Exeter</u>, New Hampshire;

WHEREAS, the Addendum is incorporated into the Agreement by reference herein and made part thereof.

NOW THEREFORE, in consideration of the undertakings of the parties hereinafter set forth, the Owner and the Engineer, agree as follows:

Insurance

During the term of the AGREEMENT and any extension, ENGINEER must carry and maintain the following insurance:

(A) Commercial general liability coverage with limits of at least \$1,000,000 per occurrence and \$2,000,000 aggregate applicable to the work and services performed under this AGREEMENT. The commercial general liability policy must also contain contractual liability applicable to the contractual indemnification obligation set forth in this AGREEMENT;

(B) Automobile liability coverage of at least \$1,000,000 combined single limit (each accident);

(C) Umbrella liability coverage of at least \$10,000,000 \$5,000,000;

(D) Professional liability coverage with minimum limits of \$1,000,000 per claim and \$3,000,000 aggregate;

(E) Workers' compensation coverage meeting State of New Hampshire required limits and providing employer's liability coverage.

Prior to execution of this AGREEMENT, ENGINEER must furnish to OWNER a certificate of insurance proving it carries the insurance described above. The certificate must indicate that the OWNER and its officials, agents, employees and volunteers are named as an additional insured on ENGINEER's commercial general liability, automobile liability, and umbrella liability

 Addendum
 Page 1
 Engineering Services Contract

 G:\PROJECTS\EXETER, NH\NNUMB\N2834 - Salem Street Area Utility Design\Westside Drive Proposal\Comments June 2020\Addendum to Contract - Lim liab.doc

policies on a primary and noncontributory basis. If ENGINEER's liability policies require certain policy provisions or endorsements to effectuate OWNER's additional insured status, then ENGINEER must provide such policy provisions or endorsements prior to execution of this AGREEMENT.

Indemnification

The Consultant agrees, to the fullest extent permitted by law, to indemnify and hold harmless the Client, its officers, directors and employees (collectively, Client) against all damages, liabilities or costs, including reasonable attorney's fees and defense costs, to the extent caused by the Consultant's negligent performance of professional services under this Agreement and that of its subconsultants or anyone for whom the Consultant is legally liable.

IN WITNESS WHEREOF, the parties hereto have affixed their hand and seals at <u>Rockingham</u> County, New Hampshire, the day, month, and year first above written.

Underwood Engineers, Inc. ENGINEER

By: Keith A. Pratt, P.E., President (Authorized Representative) Date: 7-30-20____

By: W. Steven Clifton, P.E., Vice President (Authorized Representative*) Date: 7-30-2020

Town of Exeter, NH OWNER:

By: (Authorized Representative*) Date: <u>8/3/20</u>

Signatures should be supported by appropriate document.

Addendum Page 2 Engineering Services Contract G;\PROJECTS\EXETER, NH\NNUMB\N2834 - Salem Street Area Utility Design\Westside Drive Proposal\Comments June 2020\Addendum to Contract - Lim liab.doc

		DER NH SAG &	2141 1	Form Approved DES 11/00					
PAL	RTI-GENERAL								
1. GRANTEE / LOANEE 2. GRAN									
3. NAME OF CONTRACTOR OR SUBCONTRACTOR 4. DAT									
Underwood Engineers, Inc.									
5. ADDRESS OF CONTRACTOR OR SUBCONTRACTOR	(Include ZIP)	6. TYPE O	F SERVICE T	O BE FURNISHED					
25 Vaughan Mall, Portsmouth, New Hampshire 038	01-4012								
PARTI	- COST SUMMAR	. <u>Y</u>							
		HOURLY	ESTIMATED						
7. DIRECT LABOR (Specify labor categories)	HOURS	RATE	COST	TOTALS					
rincipal	24	\$64.50	\$1,548.00						
r. Project Manager	16	\$54.50	\$872.00 \$3,572.00						
roject Manager	74	\$47.00 \$43,00	\$3,182.00						
r. Project Engineer	253	\$33.00	\$8,349.00						
roject Engineer roject Engineer (II)		\$33.00	\$0.00						
r. Resident Engineer	0	\$35,00	\$0.00						
Lesident Engineer	0	\$25.00	\$0.00						
	132	\$33.00	\$4,356.00						
Clerical	22	\$24.50	\$539.00	AND DANS PARTY LED					
DIRECT LABOR TOTAL:	「「「「「「「「「」」」 (1)	LITTER CARACTER	THE REAL PARTY AND	\$22,418.0					
		DIAR	ESTIMATED						
8. INDIRECT COSTS (Specify indirect cost pools)		x BASE = \$22,418.00	COST \$39,455.68						
	1.70	\$22,410.00	\$35,433.00						
INDIRECT COST TOTAL:	PERCENTER.			\$39,455.					
9. OTHER DIRECT COSTS			TOTAL A LINE	S A STA					
a, TRAVEL			ESTIMATEL COST						
(1) TRANSPORTATION (\$0,365 per mile)			\$0.00						
(11) TRANSPORTATION (50.305 BEF IIIIG)				Sec					
(2) PER DIEM			\$0.00	-					
(2) PER DIEM TRAVEL COSTS TOTAL:	terre de Cerc		\$0.00 \$0.00 ESTIMATEI						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES	QTY	COST	\$0.00 \$0.00 ESTIMATEL COST						
(2) PER DIEM TRAVEL COSTS TOTAL:	QTY 200	COST \$0,54	\$0.00 \$0.00 ESTIMATEI COST \$108.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W)	QTY 200 1000	COST \$0.54 \$0.10	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color)	QTY 200 1000 400	COST \$0,54 \$0.10 \$0,30	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints	QTY 200 1000 400 40	COST \$0.54 \$0.10 \$0.30 \$1.50	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00 \$60.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc.	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00 \$60.00 \$551.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL:	QTY 200 1000 400 40	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00 \$60.00 \$551.00 \$939.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc.	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00 \$60.00 \$551.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00 \$60.00 \$551.00 \$939.00 ESTIMATEL						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc.	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0.00 \$0.00 ESTIMATEL COST \$108.00 \$100.00 \$120.00 \$551.00 \$551.00 ESTIMATEL COST \$9,820.00 \$8,500.00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$120,00 \$551,00 \$939,00 ESTIMATEL COST \$9,820,00 \$8,500,00 \$6,600,00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$100,00 \$120,00 \$60,000 \$551,00 \$939,00 ESTIMATEL COST \$9,820,000 \$8,500,00 \$6,600,000 \$24,920,000						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$100,00 \$120,00 \$60,00 \$551,00 \$939,00 ESTIMATEL COST \$9,820,00 \$8,500,00 \$6,600,00 \$24,920,00 ESTIMATEL						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108.00 \$100.00 \$100.00 \$120.00 \$60.00 \$551.00 \$939.00 ESTIMATEL COST \$9,820.00 \$8,500.00 \$6,600.00 \$4,920.00 ESTIMATEL COST						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$100,00 \$120,00 \$60,00 \$551,00 \$939,00 ESTIMATEL COST \$9,820,00 \$8,500,00 \$6,600,00 \$24,920,00 ESTIMATEL						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Mise. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT d. OTHER (Specify categories)	QTY 200 1000 400 40 551	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108.00 \$100.00 \$100.00 \$120.00 \$60.00 \$551.00 \$939.00 ESTIMATEL COST \$9,820.00 \$8,500.00 \$6,600.00 \$24,920.00 ESTIMATEL COST \$0,00 \$0,00						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT d. OTHER (Specify categories)	QTY 200 1000 400 40 551 'AL:	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$100,00 \$120,00 \$551,00 \$939,00 ESTIMATEL COST \$9,820,00 \$6,600,00 \$6,600,00 ESTIMATEL COST \$0,000 \$0,0000 \$0,0000 \$0,0000 \$0,0000 \$0,0000 \$0,0						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT d. OTHER (Specify categories) OTHER SUBTOTAL: e. OTHER DIRECT COSTS TOTAL:	QTY 200 1000 400 551 'AL:	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$100,00 \$120,00 \$60,00 \$551,00 \$939,00 ESTIMATEL COST \$9,820,00 \$6,600,00 \$6,600,00 \$6,600,00 ESTIMATEL COST \$0,000 \$0,0000 \$0,000 \$0,0000 \$0,0000 \$0,0000 \$0,0000 \$0,0000 \$0,						
(2) PER DIEM TRAVEL COSTS TOTAL: b. EQUIPMENT, MATERIALS, SUPPLIES (Specify categories) Mileage Copies (B/W) Copies (Color) Prints Misc. EQUIPMENT SUBTOTAL: c. SUBCONTRACTS Doucet Survey, Inc. R.W. Gillespie & Associates, Inc. Flow Assessment SUBCONTRACTS SUBTOT d. OTHER (Specify categories)	QTY 200 1000 400 40 551 'AL:	COST \$0.54 \$0.10 \$0.30 \$1.50 \$1.00	\$0,00 \$0,00 ESTIMATEL COST \$108,00 \$100,00 \$100,00 \$120,00 \$551,00 \$939,00 ESTIMATEL COST \$9,820,00 \$6,600,00 \$6,600,00 ESTIMATEL COST \$0,000 \$0,0000 \$0,0000 \$0,0000 \$0,0000 \$0,0000 \$0,0	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5					

.

COMPETITOR'S CA 13.	TALOG LI	STINGS, II basis for pi	N-HOUSE	II - PRICE S ESTIMATE ison)	S, PRIOR C	QUOTES		ARKET LICE(S)	PROPOSED PRICE
13.									
		PAR	T IV - DIR	ECT LABO	R BY CAT	EGORY			
14. INSERT THE APPROPE NOT BE LIMITED TO T SUBSURFACE, CADAS SERVICES, ETC.	THOSE CAT	EGORIES SI	HOWN IN TI , ADMINIST	HE CONTRA	CT DOCUM SPECTION,	ENTS SUCI	ł AS DESIGI WGS., STAR	N, SURVEY,	
Work category	Task 1	Task 2	Task 3	Task 4	Task 5	Task 6	Total Hours	Rate	Cost
Principal	8	2	2	12			24	\$64.50	\$1,548.0
Sr. Project Manager	12			4			16	\$54.50	\$872.0
Project Manager	36	8	8	20	4		76	\$47.00	\$3,572.0
Sr. Project Engineer	0			62	12		74	\$43.00	\$3,182.0
Project Engineer	40	12	12	173	16		253	\$33,00	\$8,349.0
Project Engineer (II)							0	\$33.00	\$0.0
Sr. Resident Engineer							0	\$35.00	\$0.0
Resident Engineer							0	\$25.00	\$0.0
Technician	12	20	4	88	8		132	\$33.00	\$4,356.0
Clerical	18	2	2				22	\$24.50	\$539.0
Tota] - Direct Isaboy (l								\$22,418.(

comments:

Underwood Engineers, Inc. (UE) will use our existing knowledge of the Exeter's wastewater collection system to develop a planning document for the Westside Drive Neighborhood that is consistent with the Town's NHDES Clean Water SRF Planning Grant. Some of UE's previous wastewater work for the Town that was used to develop this scope of work includes:

- Phase III Infiltration and Inflow Evaluation, January 14, 2013 (Phase III I/I Study) wherein UE built on previous investigations by others to evaluate Infiltration and Inflow (I/I) in the Town's wastewater collection system. This document served as the Town's Combined Sewer Overflow (CSO) Long-Term Control Plan (LTCP) and identified that a significant portion of I/I in the Town's system originated from private sources.
- Public Outreach and Private I/I Mitigation Program (2015), January 12, 2016 wherein UE assisted the Town develop a Town-wide public information mailer and private I/I policy supported at all levels of the Town government.
- Combined Sewer Overflow (CSO) Long Term Control Plan (LTCP) Update, (January 30, 2017) which recommended private I/I mitigation including private I/I pilot areas.

The Westside Drive neighborhood was identified as a private I/I pilot area in the Town's Phase III I/I study and CSO LTCP. To help gain support of the stakeholders and develop effective concepts UE's project approach includes a simplified Context Sensitive Solutions (CSS) process developed originally by AASHTO and NHDOT. As opposed to traditional approaches, the CSS focuses on defining the problem and framework <u>prior</u> to developing alternatives. This requires mechanisms that first collects information on issues and listening to the public/stakeholders to understand the current challenges prior to presenting concepts.

The primary objective is to <u>develop a report phased preliminary design for the Westside Drive</u> <u>Neighborhood that could be used as a tool for future I/I mitigation and project development</u>. It is intended that the CSS process will be used to include the following considerations for overall project planning and concepts:

- Evaluate alternatives to reduce roadway and sidewalk impervious area (possible non-point nutrient source mitigation considerations)
- Evaluate the adequacy of existing storm drain systems and the feasibility of additional drainage systems, drainage outfall limitations (Little River stage height), and private drainage tie-ins

, · / ·

- Evaluate alternatives to reduce groundwater impacts to the roadway
- Evaluate alternatives for private sump pump mitigation and separation from the sewer
- Feasibility of stormwater BMPs for water quality
- Water system condition considerations and planned improvements

- Roadway and sidewalk safety improvements
- Timing of utility improvements with roadway repairs
- Town participation for work on private property
- Private utility (gas, electric, cable, telephone) improvements

Underwood Engineer's Scope of Services includes:

Task #1 - Public Participation and CSS Approach

Prepare for and assist with facilitating the following for CSS and Public Information Process as described above:

- Kickoff Meeting with DPW
- Stakeholder/Public Input Meeting #1
 - o Introduce project to public and abutters
 - o Gain input on apparent problems within the work area
 - o Gain input on wants for improvements from abutters
 - o Allow attendees to identify problem areas on preliminary base plans (aerial photo/GIS)
- Develop Conceptual Alternatives
 - Work with Town staff to develop alternatives based on input from public input meetings and general understanding of costs for types of improvements
 - o Attend work sessions (2) with DPW to refine concepts
- Stakeholder/Public Input Meeting #2
 - Present selected alternative concepts to public and abutters
 - o Receive general feedback and comments

The information and feedback gathered through the CSS process will be incorporated into the conceptual planning documents and design plans described in later phases of the project.

Task #2 - Mapping and Base Plan Development

Develop Base Maps for use in conceptual designs and public meeting support including the following:

- Town GIS data (property lines, buildings, and utility information)
- Supplemental topographic survey to locate the following:
 - o Roadway centerline
 - o Edge of Pavement
 - o Roadside Drainage Swales
 - o Drainage Structures and Inverts
 - o Sewer Manholes
- Field investigations to establish 4 temporary benchmarks
- Aerial photography

Deliverable will be a base plan of the project area in 2019 Autocad Civil3D format using Horizontal Datum NHSPC, NAD83(2011) and Vertical Datum NAVD88.

Task #3 - Subsurface Investigation and Evaluation

Perform one day of borings to evaluate subsurface conditions and install monitoring wells to evaluate groundwater conditions over time. This task will include 1 day of subsurface investigations that are anticipated to include up to:

- o Eight (8) borings approximately 10' deep to evaluate subsurface soil conditions
- o Four (4) groundwater monitoring wells to evaluate groundwater conditions over time
- o Grainsize distribution tests to evaluate road base materials and estimate soil permeability

o Geotechnical Summary Report

Task 4 – Basis of Design Planning Document and Conceptual Design Plans

UE will perform the following evaluations and incorporate findings and information gathered during Tasks 1 through 3 into a basis of design planning technical memorandum for the Westside Drive Neighborhood.

Sewer/Water Service Location and Private I/I Mitigation

Review the existing house inspection forms that were previously performed by UE (2009). UE will provide supplemental inspections (20 assumed -3 days) for properties not previously inspected if access is granted by the property owner. Critical information from inspections includes:

- Water service location
- Sewer service location and depth where it exits the building
- Drainage systems
- Illicit sewer connections

Findings will be summarized in a technical memorandum. UE will incorporate this information into the design concepts and work with the Town to develop a strategy to address private I/I in the project area.

Roadway Condition and Drainage System Evaluation

Evaluate roads and sidewalks for safety improvements and potential for reducing impervious cover. This does not include design of the pavement section at this time. Evaluate the condition of existing drainage systems to identify alternatives to mitigate identified deficiencies, expansion of drainage system to accommodate I/I, and potential for water quality BMPs. The findings of the geotechnical investigation (particularly groundwater levels) will be considered in evaluating the feasibility of drainage alternatives and roadway recommendations.

Water System Evaluation

Evaluate the need for water system improvements based on the recommendations of the water system Asset Management Program. Improvements will not be designed during this phase but will be identified to incorporate into the future construction project.

Private Utility Improvements

Coordinate with contacts for responsive available private utility providers (gas, electric, cable, telephone) to document their long-term private utility improvement plans within the neighborhood and consider the feasibility and cost of private utilities improvements (such as underground electric) into the basis of design for the neighborhood.

Engineer's Opinions of Probable Cost and Conceptual Design Plans

UE will provide engineer's opinion of probable cost for up to three (3) design alternatives included in the Basis of Design Planning Document. UE will develop conceptual design plans for the project for the selected alternative by the Town.





Task 5 – Town Sewer AMP Supplement

The Town's sewer system AMP will be used as a base and will be refined for the specific project elements developed for the Westside Drive Planning Document (Task 4). In addition, the findings and lessons learned through the Westside Drive planning project, particularly as they relate to Private I/I mitigation, will be used to supplement the Town's system-wide AMP.

Information to be Provided by the Town:

- Town GIS information
- Water System AMP
- Private utility contact information
- Westside Drive Pumping station O&M manual and pump curves
- Westside Drive Pumping station pump records for the past 3 years

Deliverables:

Compile a planning document and conceptual design summarizing the findings of Tasks 1 through 5 including the following:

- CSS Public Input Stakeholder Meetings (2)
- Work sessions with the Town (2)
- Provide Basis of Design Planning Memo which includes considerations for:
 - o Private I/I Mitigation
 - o Pumping Station Evaluation
 - o Roadway and Drainage Evaluation
 - o Water System Evaluation
 - o Private utility improvement considerations
 - o Preliminary cost estimate for design alternatives (up to 3)
- Conceptual design base plan for the selected alternative
- Supplement for the Town's overall wastewater collection system AMP

Work Not Included

- Typical Roadway Section recommendation
- Cadastral and easements
- Jurisdictional wetland delineations
- Final Survey, Design and Specifications
- Application, permit application and fees
- Any other services not explicitly stated above

Schedule (Field Investigations and Meetings Pending COVID 19 Health Guidelines)

Contract Authorization	June 2020
NHDES Application (by Town)	June 2020
Kickoff Meeting with DPW,	July 2020
• Field Investigations (Geotech, House Inspections, etc.)	July-September 2020*
CSS meetings and Process	August – Dec. 2020*
Basis of Design Planning Memo	Jan 2021
Conceptual Design Plans	May 2021

			Attachment B	UNDER-1 OP ID: I						
ACORD.	CER	ICATE OF LIA	BILITY INSURANCE							
THIS CERTIFICATE IS ISSUED AS CERTIFICATE DOES NOT AFFIRM BELOW. THIS CERTIFICATE OF REPRESENTATIVE OR PRODUCER	ATIVELY	OR	NEGATIVELY AMEND, DOES NOT CONSTITUT	FXTER		R'THE COV	/ERAGE AFFURDED B	YIH	E PULICIES I	
IMPORTANT: If the certificate hold If SUBROGATION IS WAIVED, subj this certificate does not confer righ	nt to th	a tar	ms and conditions of th ficate holder in lieu of su	e polic ch end	y, certain po orsement(s).	olicies may r	AL INSURED provision equire an endorsement	sorb As	e endorsed. tatement on	
this certificate does not confer rights to the certificate holder in lieu of such endorsement(s). PRODUCER 781-245-5400 Propuese 781-245-5463 Propuese 781-245-5463 Propuese 781-245-5463 Propuese 781-245-5463 Propuese Frax Propuese Frax										
Wakefield, MA 01880 Christopher A. Poole				INGILDE		d Casualty	DING COVERAGE		NAIC # 29424	
INSURED	•			INSURE	RB' Hartford	I Insurance	Company		30104 29459	
INSURED Underwood Engineers, Inc. 25 Vaughan Mali Unit 1 Portsmouth, NH 03801-4012	:		· · ·	INSURE	XI Sner	ty insurance	e Company ance Company		37885	
· · · · · · · · · · · · · · · · · · ·				INSURE						
			:	INSURE						
COVERAGES (ERTIFIC	ATE	NUMBER:		•		REVISION NUMBER:			
THIS IS TO CERTIFY THAT THE POLIC INDICATED. NOTWITHSTANDING AN CERTIFICATE MAY BE ISSUED OR M EXCLUSIONS AND CONDITIONS OF SL	IES OF II REQUIR		RANCE LISTED BELOW HA		EDUCED BY F	PAID CLAIMS.	D NAMED ABOVE FOR T DOCUMENT WITH RESPEND HEREIN IS SUBJECT TO	HE PO CT TO O ALL	LICY PERIOD WHICH THIS THE TERMS,	
INSR TYPE OF INSURANCE	ADDL.	SUBR	POLICY NUMBER		POLICY EFF	POLICY EXP (MM/DD/YYYY)	Limit	S	4 000 000	
A X COMMERCIAL GENERAL LIABILITY							EACH OCCURRENCE	\$	1,000,000 300,000	
CLAIMS-MADE X OCCUR			08SBAAE2950		06/01/2020	06/01/2021	DAMAGE TO RENTED PREMISES (En occurrence)	\$	10,000	
	_						MED EXP (Any one person)	\$	1,000,000	
							PERSONAL & ADV INJURY GENERAL AGGREGATE	\$ \$	2,000,000	
GEN'L AGGREGATE LIMIT APPLIES PER:							PRODUCTS - COMP/OP AGG	s	2,000,000	
							THORSETS SUMMER THE	\$		
B AUTOMOBILE LIABILITY							COMBINED SINGLE LIMIT (Ea accidant)	\$	1,000,000	
X ANY AUTO			08UECAZ8237		06/01/2020	06/01/2021	BODILY INJURY (Per person)	\$		
X AUTOS ONLY AUTOS			ļ				BODILY INJURY (Per accident)	\$		
HIBEDS ONLY NON-SWAES				·	•		PROPERTY DAMAGE (Per accident)	<u>s</u>		
					······	<u> </u>		\$	5,000,000	
A X UMBRELLA LIAB X OCCUR			08SBAAE2950		06/01/2020	06/01/2021	EACH OCCURRENCE	\$	5,000,000	
EXCESS LIAB CLAIMS- DED X RETENTION \$ 10	000		100D/ALL000				AGGREGATE	ŝ		
C WORKERS COMPENSATION					<u> </u>		X PER OTH-	1		
AND EMPLOYERS' LIABILITY	IN		08WBCAG4M6D	•	06/01/2020	06/01/2021	E.L. EACH ACCIDENT	ş	1,000,000	
ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory In NH)	NNA						E,L, DISEASE - EA EMPLOYE	E \$	1,000,000	
If yes, describe under DESCRIPTION OF OPERATIONS below					0.010 11	00/01/077	E.L. DISEASE - POLICY LIMIT	5	1,000,000 2,000,000	
D Arch/Engrs	1		DPR9960463		06/01/2020	06/01/2021	Aggregate		5,000,000	
Prof Liability							Aggrogate		010001400	
DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required) For Proposal Purposes Only										
				.		-				
CERTIFICATE HOLDER					CELLATION	1				
Underwood Enginee 25 Vaughan Mail Uni	:1			I ΤΗ	E EXPIRATIO	IN DATE TH	DESCRIBED POLICIES BE IEREOF, NOTICE WILL CY PROVISIONS.	CANCE BE I	illed Before Delivered in	
Portsmouth, NH 038	1-4012			AUTH	ORIZED REPRES	LAT	20			
ACOPD 25 (2016/03)							CORD CORPORATION	ΔHr	lahts reserved.	

- 6- er - 6-

ACORD 25 (2016/03)

. . .

.

Appendix B Questionnaire



EXETER PUBLIC WORKS DEPARTMENT

13 NEWFIELDS ROAD • EXETER, NH • 03833-3792 • (603) 773-6157 •FAX 772-1355 <u>www.exeternh.gov</u>

October 2, 2020

Town Resident Exeter, NH 03833

Re: Westside Drive Area Utility Improvements Exeter, New Hampshire

Dear Exeter Resident:

The Town is currently working with Underwood Engineers, Inc. to develop a plan for municipal infrastructure improvements within the Westside Drive Neighborhood. This work is part of the Town's ongoing work to provide reliable utility services to residents and is also recommended by the Town's sewer system CSO Long Term Control Plan with EPA.

We are sending this letter to encourage neighborhood residents to get involved with helping us identify long-term sewer, drainage, roadway, and water improvement needs and goals for the project. As a first step, *please fill out and return the attached questionnaire pamphlet with the included pre-paid envelope by October 15th*. You can also complete the survey online at the website below.

Please be aware that preliminary field evaluations will begin in the coming weeks (surveyors, drillers, building inspections, etc.) to gather information and these efforts are just an early step in the project planning process. We would appreciate it if you can maintain safe distances around the street crews.

Inspectors from Underwood Engineers and Flow Assessment Services will be working to confirm the location and material of sewer services exiting the houses within in the neighborhood. This typically includes inspecting the basement piping. Inspectors will be in the neighborhood this October between 8 am and 4 pm to request access to your basement. This information is an important part of the project planning, but we understand if you do not feel comfortable allowing access at this time. The inspectors will have identification and will be following proper safety protocols related to COVID-19. For homes that we are unable to access, we will follow up with a phone call to ask questions and request photos of the service if possible.

A Town Hall-style Zoom meeting is scheduled for <u>Wednesday, October 28, 2020 at 6:30 pm</u>. This is to provide you with more information and solicit additional input. For more information on this project regarding schedules, updates, and how to access the Zoom meetings please visit

Page 2 of 2 October 2, 2020

the Town's website below:

https://www.exeternh.gov/publicworks/westside-drive-area-utility-improvement-project

Thank you very much for your time and assistance.

Very truly yours,

TOWN OF EXETER

Jennifer Mates, P.E. Assistant Town Engineer

PROJECT GOALS

- Improve Town utilities and roadways in the . neighborhood
- Improve drainage issues •
- Reduce the amount of Stormwater and Groundwater entering the Town's Sewer System from private sump pumps, drains, etc. This helps protect the environment from combined sewage overflows and will help reduce wastewater treatment costs for everyone in Town.


How can everyone help reduce stormwater and groundwater from entering the sewer system?

This schematic shows typical solutions for removing private sources of stormwater/groundwater from entering the Town's sewer system.

Brochure produced by: Public Works Department 13 Newfields Rd Jennifer Mates, PE Assistant Town Engineer 603-418-6431, jmates@exeternh.gov

NEXT STEPS


- Please complete this questionnaire and mail back • to the Town of Exeter with the provided prepaid envelope.
- You can also complete this questionnaire online and stay up to date on the Town's website: https://www.exeternh.gov/publicworks/westsidedrive-area-utility-improvement-project
- The Town will have staff, surveyors and soil scientists in the field collecting data.

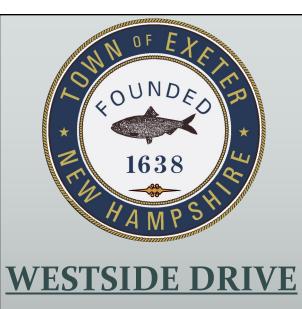

<u>AREA</u>

OUESTIONNAIRE



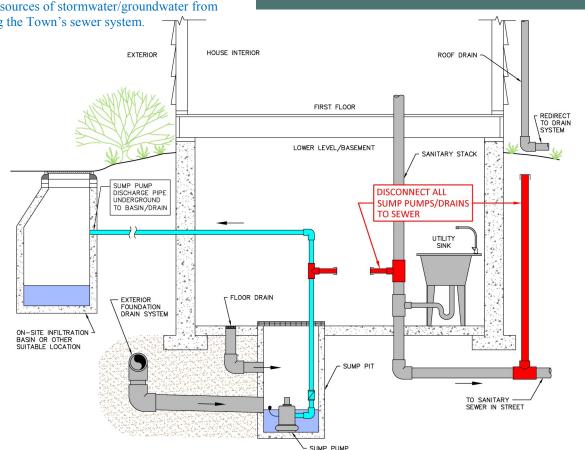

QUESTIONNAIRE

Name:
Address:
ADDRess
Email:
DHONE

Please review the schematic on the reverse of this pamphlet for additional information and complete the following questionnaire:

1. Do you have a sump pump (Circle one)? Yes or No

IF YES, WHERE DOES IT DISCHARGE (CHECK ALL THAT APPLY):
□ Onto ground outside □ Basement sink
□ Cellar floor drain □ Basement sewer pipes

□ Other

2. DO YOU HAVE ANY OF THE FOLLOWING CONNECTED TO THE SEWER (CHECK ALL THAT APPLY)?
□ Floor drain □ Foundation Drain □ Yard Drain
□ Roof Drain □ Gutters w/ Downspouts □ Sump Pumps Comments_______

3. HAVE YOU EXPERIENCED?
Odors

Flooded Basement


Sewer Backups

Sewer Pipes Clogged

Other

4. Would you like a Town representative to assist you with the completion of this questionnaire or other technical assistance? **Yes or No**

5. DO YOU NOTICE DRAINAGE ISSUES IN YOUR NEIGHBORHOOD? IF SO PLEASE MARK UP THE AERIAL PHOTO SHOWING WHERE AND PROVIDE ADDITIONAL COMMENTS.

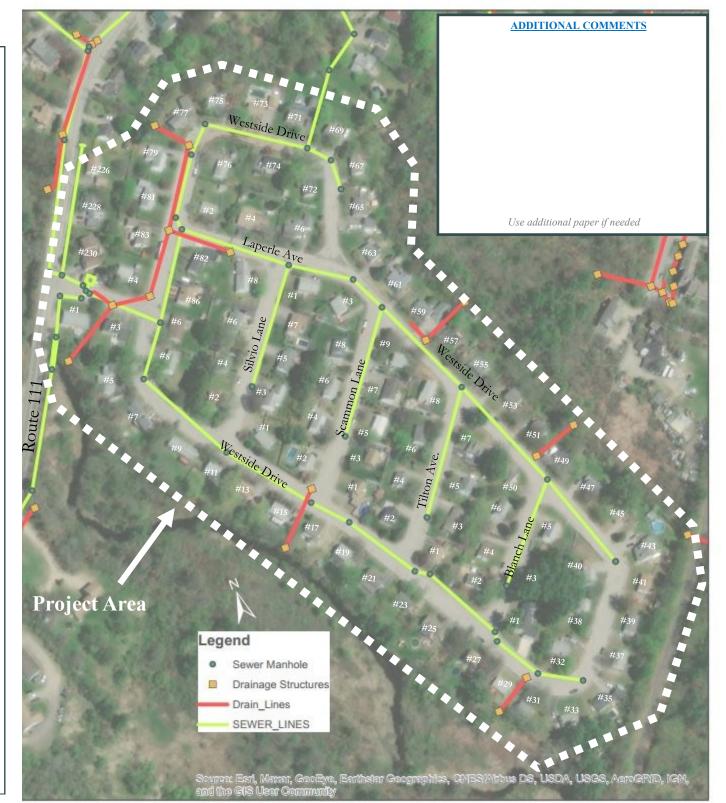

Survey Results Westside Drive Planning October 2020

House							Online or	2. Sump		4. Connections		6. Contact	
number	street name	Name1	Name2	Name	phone	email			3. Discharge location?	to sewer?	5. sewer/drainage problems?	y/n	
1	Blanche Lane	MACDONALD CHRISTOPHER	MACDONALD DANIELLE										
2	Blanche Lane	HARDENBOOK ADAM	HARDENBOOK LISA										
3	Blanche Lane	FEDELSKI KAREN											
4	Blanche Lane Blanche Lane	MCKINSTRY SAVANNAH CORNELIUS DANIEL & ANGELA	MCKINSTRY MICHAEL	Michael McKinstry	6035835739	mjmckinstry@gmail.com	Online	у	Onto ground outside	N/A	flooded basement	n	Yes. There are a couple areas alon and many large potholes in these a behind Laperle also has a lot of bro something else.
230	Front St	SABATOS ALENA	LINGLEY GREGORY										
1	Laperle Ave	DEOLIVEIRA SCHELLAS J	DEOLIVEIRA KARI										
2	Laperle Ave	O'MALLEY KAREN	STOWE DAVID				_						
3	Laperle Ave	BELTON KEVIN	-	-	-					-			
4	Laperle Ave Laperle Ave	CHICHESTER LISA & DARRELL PETTORUTO JOHN	+	-	+		+						
6	Laperle Ave	PEREIRA JOSEPH	FINOCCHIO KATRINA										
1	Scammon Lane	PATRICKO JUDY			1								
2	Scammon Lane	OSTROFF SAM	OSTROFF MONIKA										
											sewer backups, sewer pipes clogged (approx.		After the drainage is repaired the s
3	Scammon Lane	BARBIN DOUGLAS		Douglas & Robin Barbin	603-772-6866	robinbarbin@comcast.net	mailed	n	N/A	floor drain, found	30 years ago, 1 time)	n	them that" should be removed - m
4	Scammon Lane	SWEENEY JOHN	-	-	-					-			
5	Scammon Lane Scammon Lane	LEONARD MICHAEL MOREAU DAVID F					-			-			
7	Scammon Lane Scammon Lane	BAKER DEBRA & ROBERT SWEENEY GEORGE		Robert/Debra Baker	6039446584	double.h@comcast.net	Online	Y	Sewer pipes	sump pump	flooded basement	N	Yes, throughout the entire Neighbo evacuate road drainage at perimete puddle/pond on streets and unders to evacuate to river, and unable to sewer to evacuate. No opportunity and above basement floor. Like co discussion thank you Robert Baker
9	Scammon Lane	HALLETT GEORGE		George Hallett	(603)772-8427	george_hallett@yahoo.com	Online	v	Sewer pipes	sump pump	flooded basement	n	The whole housing project has very are high
2	Silvio Drive	WILLETT ELAINE		ecorge Hullett	(000)//2 0121	george_nanon@janeo.com		,	server pipes	sump pump			5
3	Silvio Drive	KELLY JOHN											
4	Silvio Drive	SMITH DOUGLAS	GOUDREAULT CHERYL										
5	Silvio Drive Silvio Drive	HADLEY JEFFREY GIANG PLANKONE	HADLEY TARA	Tara Hadley	N/A	N/A	Online	N	N/A	N/A	N/A	N	N/A
7	Silvio Drive	HELLIESEN WALTER		Walter Helliesen	6036866752	whelliesen@gmail.com	Online	у	Onto ground outside	N/A	flooded basement	n	*The loop area of Westside drive # to the even side. *There is a drain I during the 1994 reconstruction of c that many houses that had never h blocking off our garage as it was n curbing disappeared as the street u driveway so water flowed away from
8	Silvio Drive	PITTENDREIGH MARK											
1	Tilton Ave	METZ NICHOLAS JAMES	-							-			
2	Tilton Ave Tilton Ave	LUKER KAITLIN MARTIN PAUL											
3	Tilton Ave	GOVE DANIEL											
4	Tilton Ave	KING LORI											
5	Tilton Ave	WALKER PAUL H		Paul Walker	6037788469	pwalker02@hotmail.com	Online	Y	Sewer pipes	у	N/A	n	i have not.
6	Tilton Ave	PEARCE JOSEPH											
7	Tilton Ave	TERANDO JOHN					-						
7	Tilton Ave Tilton Ave	STUER ERIK ALLEN MELISSA	STEPHEN MARSHAL				-						
0	THEOTAVE	ALLEN WILLISSA	STEFFIEIN WIAKSHAL										1 Westside driveway floods from ru
1	Westside Dr	TOUSIGNANT DARLENE		Darlene Tousignant	603-778-7010	dtousignant@myfairpoint.net	mailed	n	N/A	N/A	none	n	driveway - town repaved once afte
3	Westside Dr	GRAY BRIAN T	GRAY CASSANDRA A										
3	Westside Dr	TOUSIGNANT DARLENE											
4	Westside Dr	OLIVIER PATRICIA					-						
5	Westside Dr Westside Dr	STEELE GLEN LEAR CHESTER & BARBARA					-						
0	westside Di	LEAR CHESTER & DARDARA		-			-						
7	Westside Dr	BLAIS ARTHUR & SHANNON		Shannon & Arthur Blais	6035607244	sablais0516@gmail.com	Online	N	N/A	N/A	Flooded basement - Prior to purchasing home in December 2019, under previous ownership. Prior owners disclosed basement flooded from the "Mother's Day Flood" in 2006. Clogged sewer pipes - During inspection of home for purchase in December, camera in sewer pipes revealed heavy "sludge" in pipes. Recent work in August occurred to both indoor/outdoor pipes leading to sewer system. Work was approved by Town and completed by plumber and excavator who were bonded to the Town.		No but have only been here since
8	Westside Dr	COOMBS ANNE M		Shannon & Arthur Diais	000001244	casalooo rowymail.com	0	14					
9	Westside Dr	MATTERA TREVOR & KATHERI	NE				1			ł		1	
11	Westside Dr	GARDNER JOSEPH	GARDNER GINA										
12	Westside Dr	MANIX RICHARD											
13	Westside Dr	PORCH JAMES								 			
13	Westside Dr	OUELLETTE MARK								+		1	Yes, corner of Tilton and westside
15	Westside Dr	STAGNONE PHILIP & MEGAN		Megan Stagnone	N/A	meganstagnone@gmail.com	Online	Y	Onto ground outside	N/A	Clogged sewer pipes	N	between 15 &17 appears to be bro


7. drainage issues?
and the sources.
is along Westside Drive where water pools across the whole road after storms, hese areas that return each year, despite patching. The portion of Westside Dr. t of brown rust color staining, not sure if this is due to a water/drainage issue or
I the streets really need to ber paved over and the sidewalks (if one would call ed - most of them are horrendous.
eighborhood, including standing water. Obviously catch basins only designed to rimeter, No drainage for center streets/yards causing groundwater to underground. No route for groundwater (above basement floors even in August) ble to be absorbed easily in high water:stormy months. Only option to pump into tunity to dig a dry well to pump to since water table only 12-24" below ground, ike constantly bailing out a rowboat. Feel free to contact me for further Baker
as very bad drainage the sub pumps run year round all the time the water levels
Irive #67 to 79 is always wet with water running from the high (odd) side downhill drain between #2 and #4 Laperle that creates ice issues all winter. *In general, on of our neighborhood, the height of the road was increased to such a point ever had water in their basements needed to have sump pumps. We ended up was now below grade level and water would flow in off the street. Many areas of street was now higher than the sidewalk. We ended up having to repave our ay from the house. Thank you for putting this forward on the DPW agenda.
rom runoff of Westside D every time it rains - it puddles water gets under e after putting in a runoff to river - it needs to be paved again.
since December 2019.
stside drive near #1 Tilton flooding, backside loop #76 flooding Road. Drain line
be broken and up on an angle

Survey Results Westside Drive Planning October 2020

							1	-		Г	1	1	1
House number	street name	Name1	Name2	Name	phone	email	Online or mailed?	2. Sump pump Y/N	3. Discharge location?	4. Connections to sewer?	5. sewer/drainage problems?	6. Contact y/n	
17	Westside Dr	MOORE MARLEEN		Marleen Moore	8023104584	marleenmmoore@gmail.com	Online	N	N/A	N/A	none	n	none
19	Westside Dr	GURSHIN DENISE & CHRISTOPH	IER										
20	Westside Dr	POWERS JAMES & SUSAN		Susan & James Powers	6035805537	palmgirl49@yahoo.com	Online	Y	Onto ground outside	N/A	flooded basement	N	the semi-circle to the left when you
21	Westside Dr	WALKER DAVID & KATHRYN		David Walker	6037735010	kdwalker95@myfairpoint.net	Online	N	N/A	N/A	flooded basement	N	After rains there is usually a large p can get very large in the Winter/Spr standing water as does the outer lo
23	Westside Dr	CALLAHAN WILLIAM					-						
23	Westside Dr Westside Dr	PARKHURST CATHERINE	6710 JJ ROBERTS	Scott A Luczko, P. E.	603-361-3196	brasius@gmail.com	Online	N	N/A	Tankless water h	N/A	N	Perched groundwater at northern e Westside Dr). Several neighbors re GW levels in backyards, causing so
27	Westside Dr	HAYWARD MATTHEW & KIMBE											
29	Westside Dr	HANNA BRIAN	NAWN LIANNA		0000077404		Online				Clogged street drain at 29 Westside resulting in water flowing down our drive, under our deck and pooling in our back yard at 31.		
31 32	Westside Dr Westside Dr	MARSHALL JOANNE ST.HILAIRE JEFFREY		Dale Pennington	6033277464	N/A	Online	Y	Onto ground outside	N/A	Seeping sewer line inside our basement.	n	N/A
33	Westside Dr	GROWER JOAN											
35	Westside Dr	LANPHEAR ROGER											
37	Westside Dr	MOSHER GARY											
38	Westside Dr	FOLEY JOHN		John R. Foley		john.richard.foley@gmail.com	Online	у	Onto ground outside	N/A	flooded basement, I lived here since 1994 and two times the basement has flooded. The first time was the "Mother's Day Flood" and the second time was just a random occurrence. All of the sudden water poured into our basement. I think there was an issue with the pumping station in the front of the neighborhood. (Sorry I don't know the dates)	n	A couple of places Big Issue: F to always have lots of water. I don't more Small Issue: Where Tilton / there.
39 40	Westside Dr	HAZELTINE BEVERLY DRISTILIARIS AARON	DRISTILIARIS MORGAN	Beverly E. Hazeltine	603-772-4184	N/A	mailed	n	N/A	N/A	N/A	n	N/A
40	Westside Dr Westside Dr	STANCHIS MARK	STANCHIS RENEE										
43	Westside Dr	TRUEMAN GLEN											
45	Westside Dr	HERRICK JAMES											
47	Westside Dr	SAMPSON MARK											
47	Westside Dr	SAMPSON CHARLES & JUDITH											
49 50	Westside Dr Westside Dr	ANDERSON CARL FILLION LUC	FILLION AUTUMN	Luc Fillion	970-819-5502	lucgfillion@gmail.com	mailed	v	basement sewer pipes	sump pump	N/A	n	Please see below for three known is
51	Westside Dr	MOYER HERBERT			570 015 5502	ideginione gridi.com	indica	у	busement sewer pipes	Sump pump			
53	Westside Dr	PAYSON JOHN											
55	Westside Dr	BATTLES SCOTT	BATTLES ALLISON	Scott Battles	603-722-5034	<u>sbah2104@gmail.com</u>	Online	у	Onto ground outside	N/A	Flooded basement, once, french drain pipe was clogged, unclogged the pipe and no other issues. Shower backed up, plumper installed new sewer pipe from the house to the town pipe, as roots cause the house pipe to separate, no issue since.	n	when it rains hard, most street drain winter, even though the drains are of freezes.
57	Westside Dr	LEWIS KAREN											
59 61	Westside Dr Westside Dr	LUPOLI CHRISTOPHER WHITEHOUSE KEITH					-						
63	Westside Dr	JOHNSON AUDRIA		Audria Johnson (Gonthier)	603-244-8464	loonybinteacher@gmail.com	Online	Y	Discharge pipe buried underground to edge of property		flooded basement, odors		Significant drainage issues on Wes 76 (I believe that is the right numbe water/puddling issues on Laperle A
65 67	Westside Dr Westside Dr	KELLOWAY GEORGE & RUTH WASHINGTON SHERRIE		George Kelloway	6036861963	blue11m8@hotmail.com	Online	Y	to rear of property	N/A	N/A	N	Westside Dr. from 63 to79.included development.Yards between Laperl resident committee or resident repre
69	Westside Dr	LESCH LAWRENCE & MICHELLE											
71	Westside Dr	GAROFANO KEVIN	GAROFANO KATHLEEN										
72	Westside Dr	MORGAN SARAH											
73 74	Westside Dr Westside Dr	BUTZER SCOTT BLONDA WILLIAM					+						
75	Westside Dr Westside Dr	ANDERSON ERIK MARSTON LESTER		Erik Anderson	6037787622	eaanderson606@gmail.com	Online	у	Onto ground outside	N/A	flooded basement		Yes there are problems with this are prolong rain the area only catch bar made out of a swamp. In past years When west side dr was resewered i why it's a swampy area. I have lived
77	Westside Dr	COMEAU KIM											
79	Westside Dr	BARTELL WILLIAM	BARTELL JOANNA	Joanna Bartell	6173086513	joannabartellnow@gmail.com	Online	Y	Sewer pipes	sump pump	flooded basement, flooded back yard	N	Yes, there is often standing water a
81 82	Westside Dr Westside Dr	BERRY CHRISTOPHER								+			
83	Westside Dr	BORIS SPEND THRIFT REALTY T	W. BEARDEN & L. WRONKO	WSKI, TT			1			ł			
86	Westside Dr	ELDRIDGE LAURIE				<u> </u>				<u> </u>			<u> </u>

7. drainage issues?
ou enter the WS
e puddle at the southern intersection of Westside Drive with Tilton Ave. It Spring when drainage is further limited. Laperle seems to always have r loop of Westside Drive in that area.
n end if the neighborhood (iron stains present on pavement; 70s section of require sump pumping due to water in basements, however we do not. High g soggy spots at the odd-numbered 20s houses.
e: Part of Westside Drive that connects to Laperle Avenue. That circle seems n't live on that part of the street so those people who do would know a lot on Ave and Westside Drive connect. There seems to always be a puddle
n issues. (Circled CBs between 77/79, 57/59, and 49/51 Westside)
rains don't seem to be able to handle the amount of water, especially in the re cleared, major amounts of water stays on the road, puddles up and
Vestside Dr (around 73, 74, 75, 76) with water in the street and in the yard on nber). These issues are along line of the drain line on the map. Some e Ave and in front of my house (63) Jed is all of Laperle Av.As shown on map there is no drainage on this side of perle and Westside dr. will often flood.Can you add my name for any future
epresentatives that will be needed or held in future, please.
The second state of the se
area. Please note this year is not typical of past years. In times of heavy basin with its 12" line gets overwhelmed. This area of west side dr. Was ars the water table is artificially is to high for houses that have basements. ed (septic) I saw the trenches they were digging had pure gray clay this is ved here for 42 years.
er and big puddles when it rains.

Appendix C Neighborhood Meeting #1

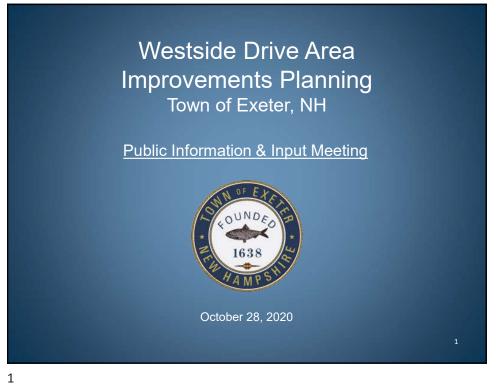



3/16/2021

Agenda


- 1. Background
- 2. Project Goals
- 3. Project Scope and Approach
- 4. Work Accomplished to Date
- 5. Public Information
- 6. Schedule
- 7. Contacts
- 8. Public Participation (Questions and Input)












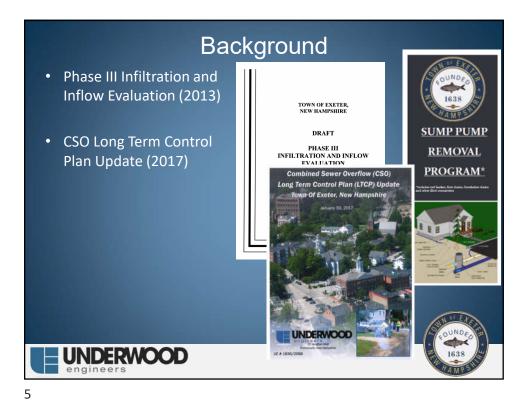

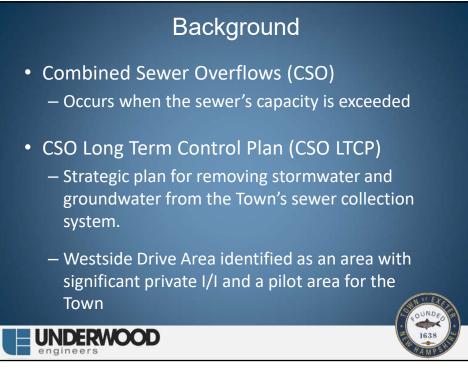

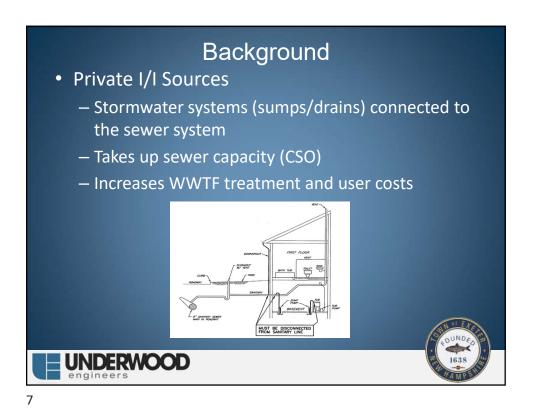

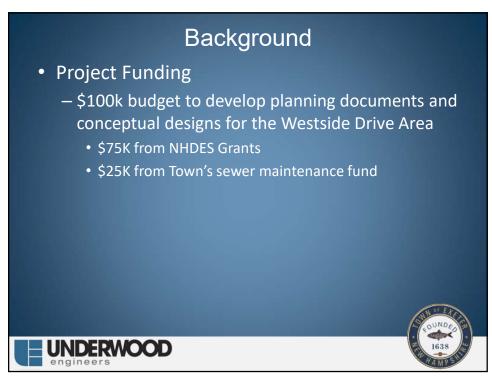


Project Goals

Develop a planning document for the Westside Drive Area to:

- Improve Town utilities and roadways within the neighborhood.
- Improve drainage issues

UNDERWOOD

- Remove groundwater/stormwater from entering the Town's sewer system.
- Solicit input/feedback from residents to incorporate other neighborhood infrastructure improvements

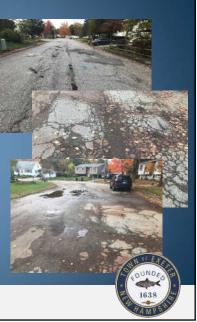


Project Scope and Approach

Planning Level Scope

UNDERWOOD

- Task 1 Public Participation
- Task 2 Mapping and Base Plan Development
- Task 3 Subsurface Investigation and Evaluation
- Task 4 Basis of Design Planning Document and Conceptual Design Plans for the preferred alternative



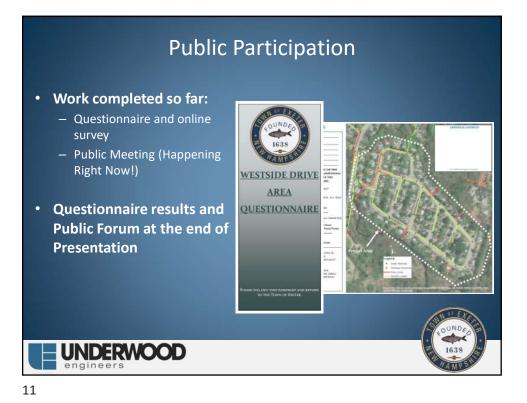






Public Engagement Meeting Listening Session


- Summarize Needs
- Blank Slate Engage Public to Collect Ideas
 - Drainage improvements
 - Utility Improvements
 - Pedestrian Safety?
 - Problem areas?

Benefit is that most of the effort is completed after public input

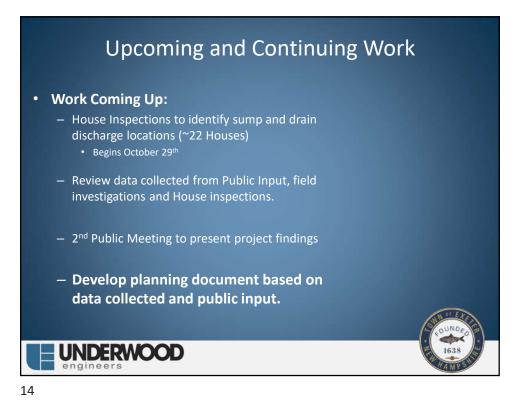


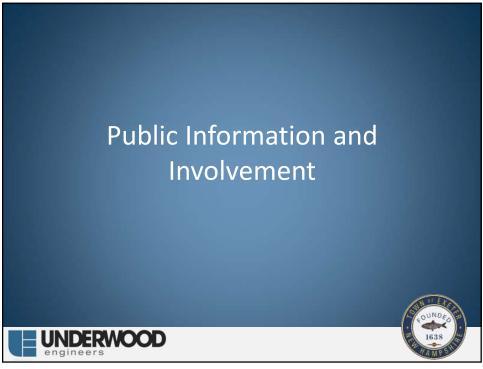


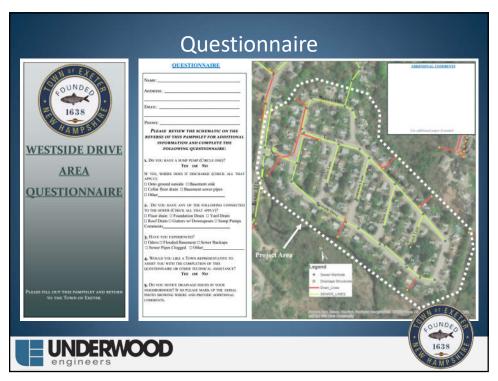


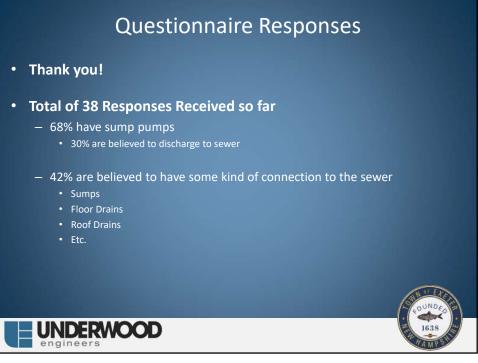



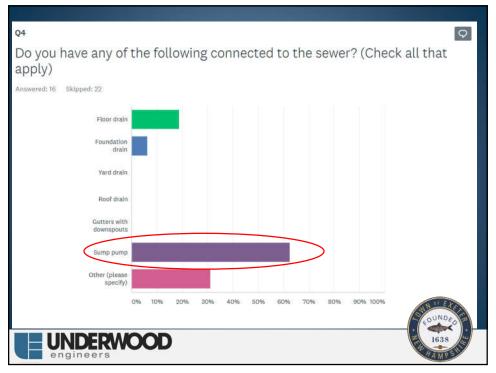


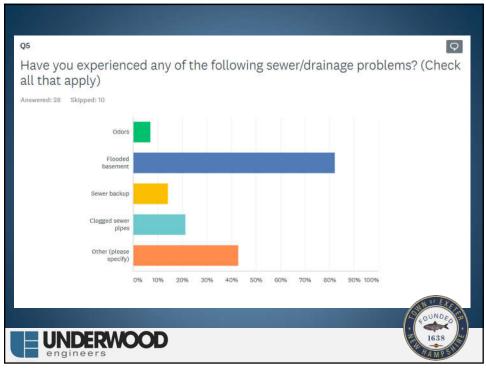

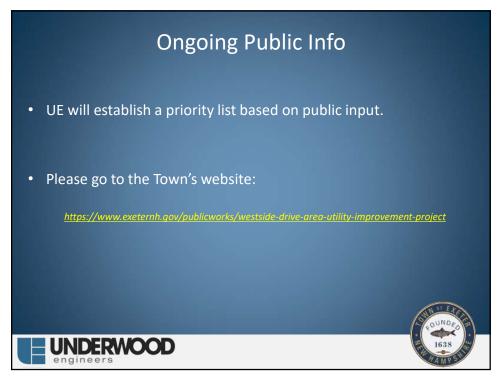


Schedule	
Project Schedule House Inspections	Begin Oct. 29 th
 Ongoing Public Information 	Winter 2020/2021
 Incorporate input and develop planning document 	Winter 2020/2021
 2nd Public Meeting to present findings 	Spring 2021
TBD	
 Final Design 	FY 2022
 Possible Construction 	FY 2023
UNDERWOOD engineers	1638 TAMP SU



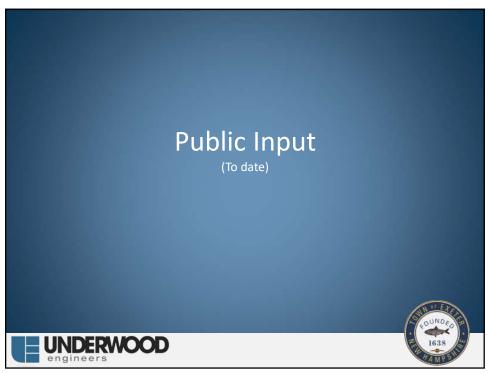





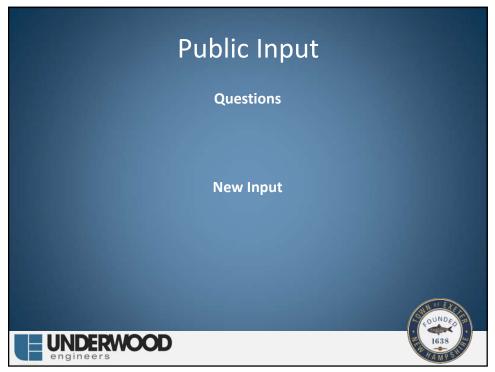



Appendix D Neighborhood Meeting #2

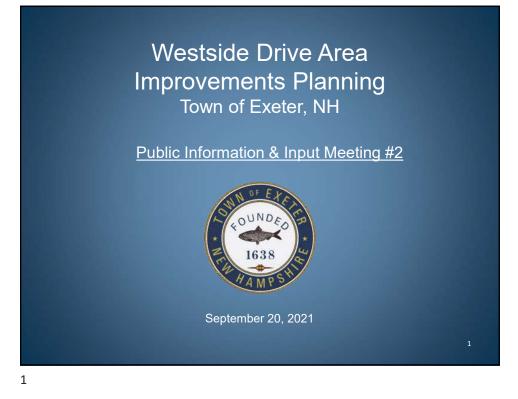

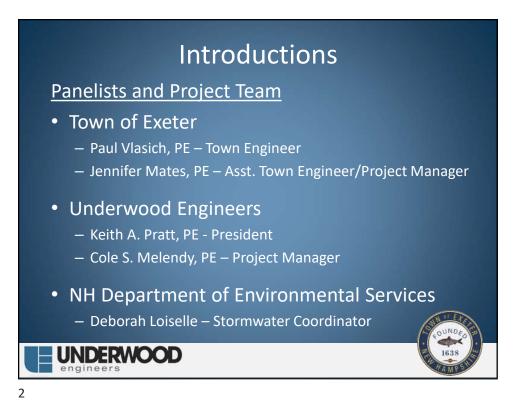


Agenda

- 1. Background
- 2. Project Goals
- 3. Project Scope and Approach
- 4. Public Information
- 5. Conceptual Plans


UNDERWOOD engineers


- 6. Next Steps and Contacts
- 7. Public Participation (Questions and Input)




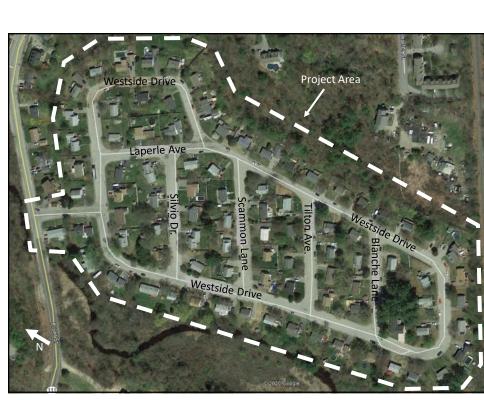


4

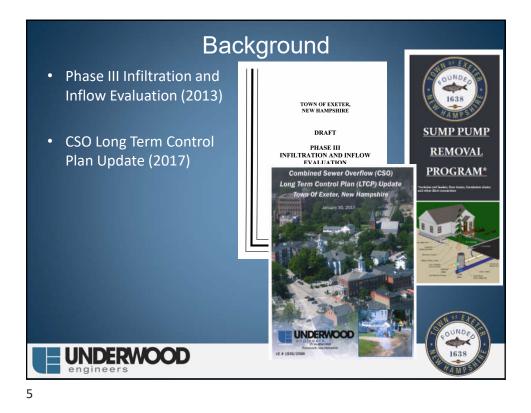


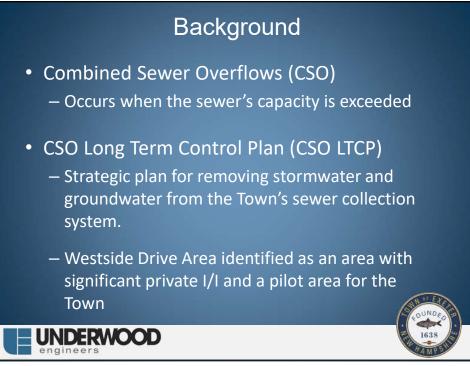


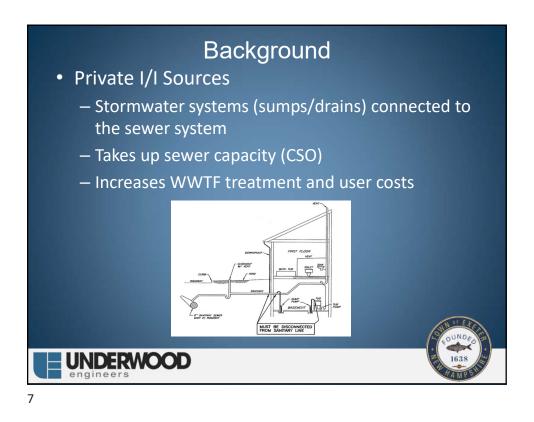

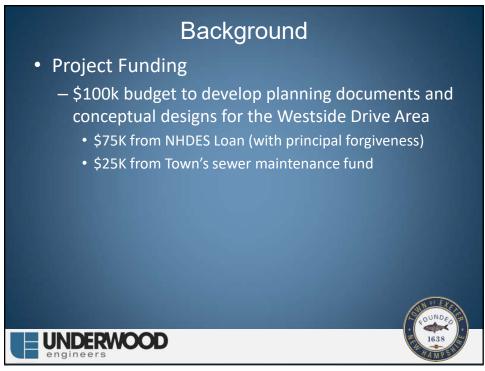



<section-header><section-header><list-item><list-item><list-item><list-item><list-item><list-item>

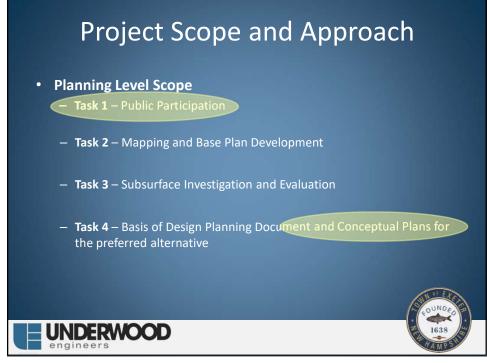


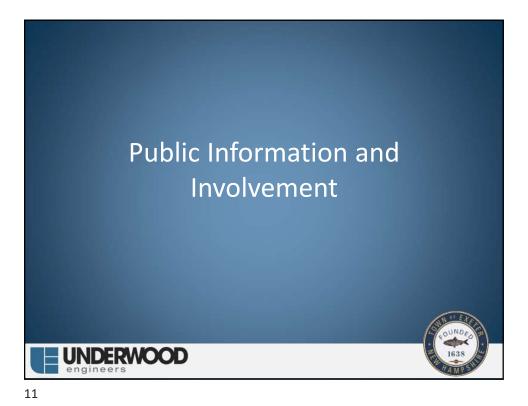


<section-header><section-header><section-header><section-header><list-item><list-item><list-item>

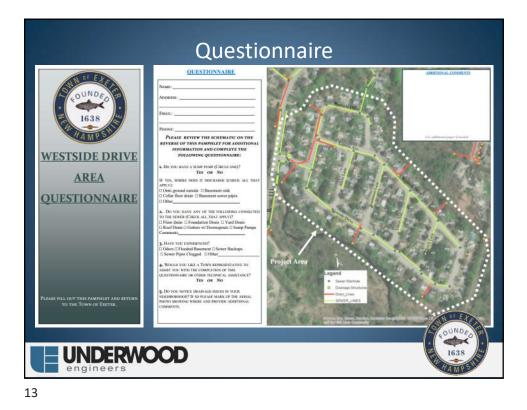

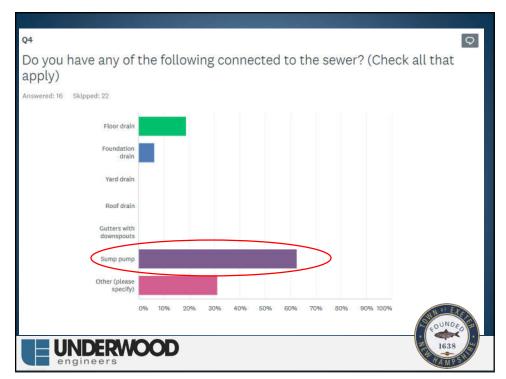

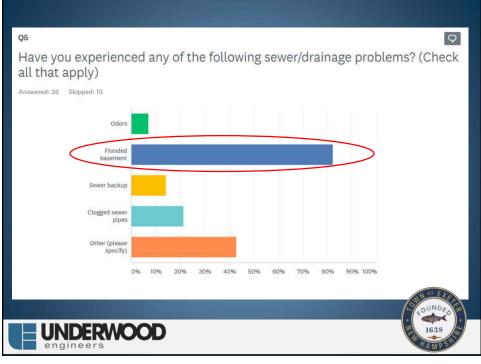


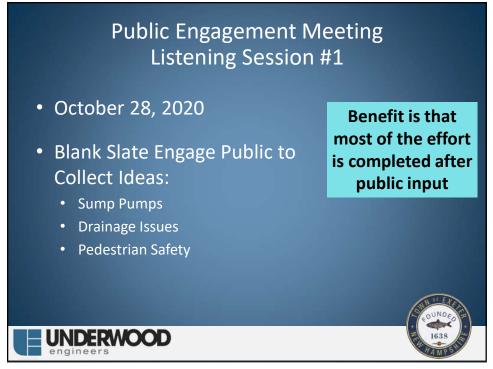








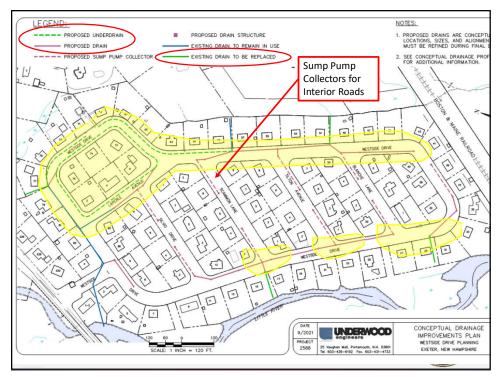






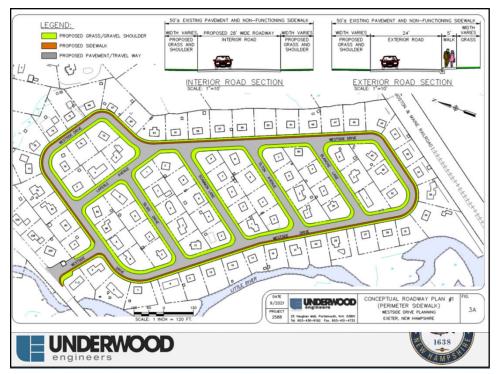



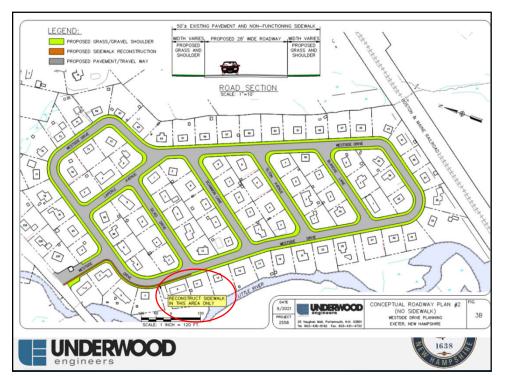





Contacts

Town of Exeter

Jennifer Mates, PE Assistant Town Engineer and Project Manager 13 Newfields Rd. (603) 418-6431 jmates@exeternh.gov

Underwood Engineers


Cole S. Melendy, PE Project Manager (603) 436-6192 cmelendy@underwoodengineers.com



30

<section-header><section-header><section-header><section-header><section-header><section-header><section-header><section-header><section-header><image><image><image><image><image><image><image><image><image><image><image>

Appendix E Raw Base Plan

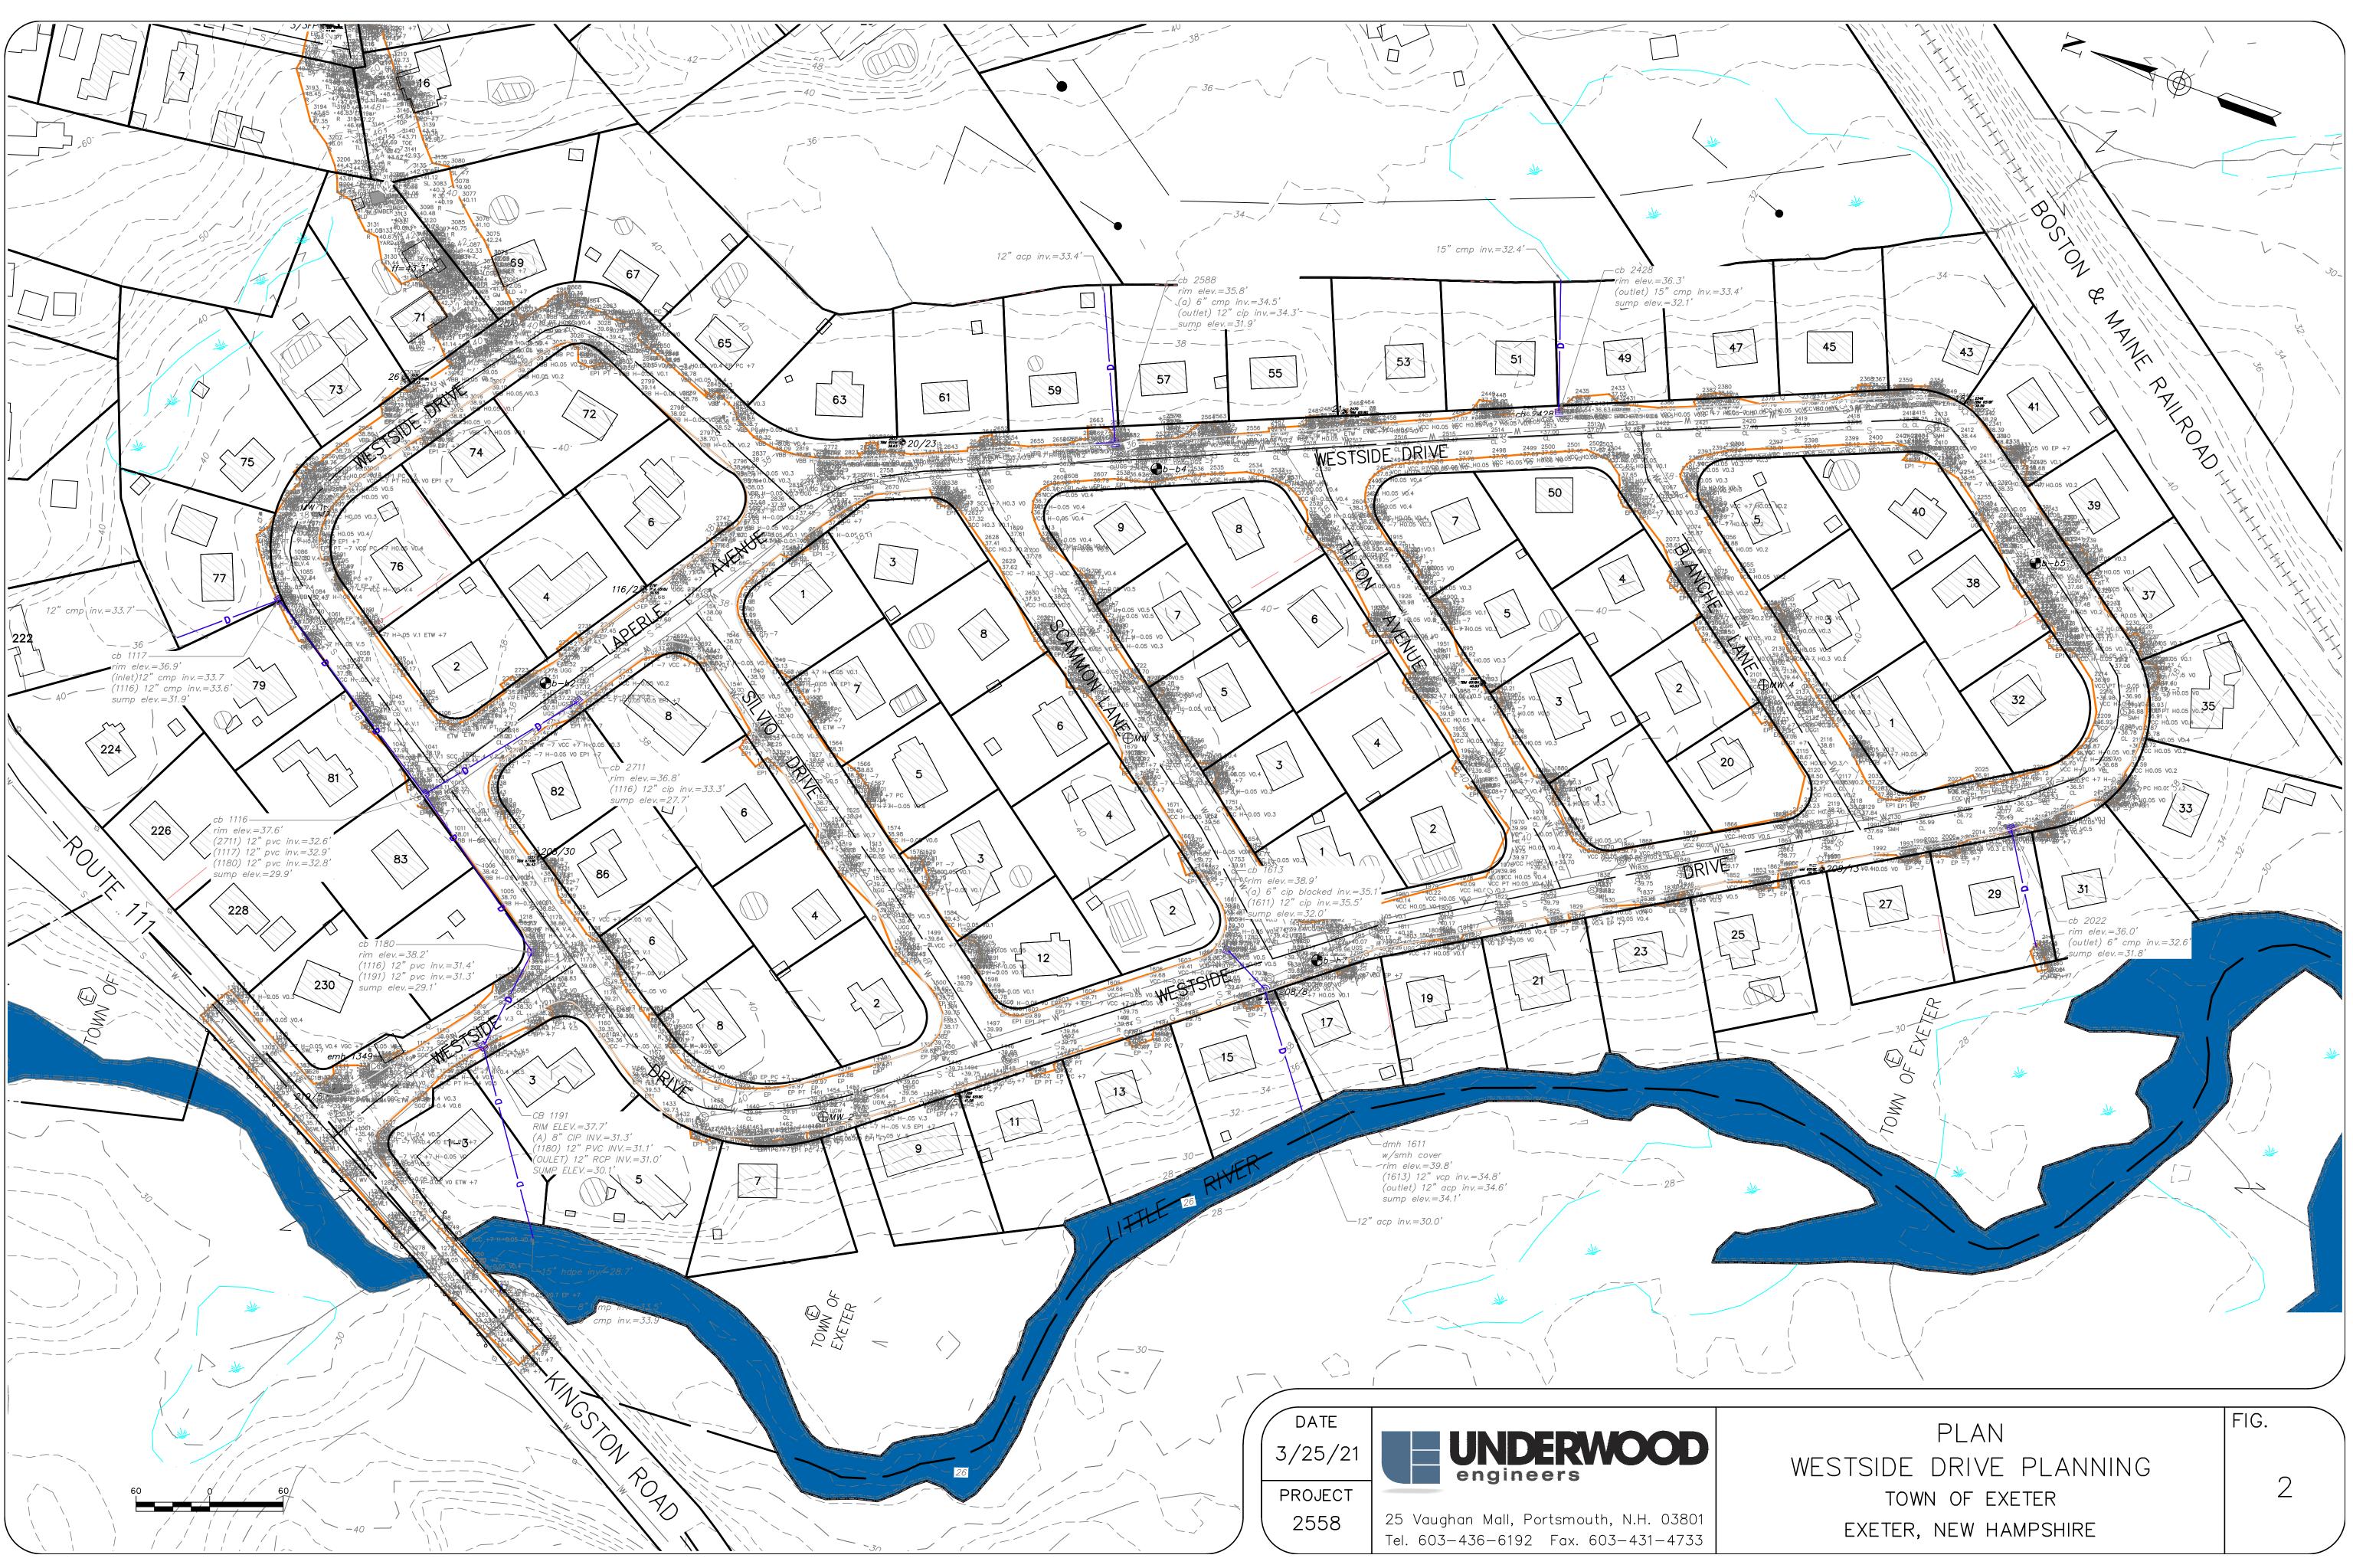

Appendix F Geotech Report



28 December 2020

Erik B. Nichols, Project Engineer Underwood Engineers, Inc. 25 Vaughan Mall, Unit 1 Portsmouth, New Hampshire 03801

Subject: Geotechnical Engineering Evaluation Westside Drive Area Infrastructure Improvement Project Exeter, New Hampshire RWG&A Project No. 0515-187

Dear Mr. Nichols:

R. W. Gillespie & Associates, Inc. (RWG&A) is pleased to provide the attached geotechnical engineering evaluation for the Westside Drive Area Infrastructure Improvement Project to be built in Exeter, New Hampshire. This evaluation was undertaken in general accordance with the Subconsultant Agreement for Professional Services between Underwood Engineers, Inc. (UE) and RWG&A, authorized by UE on 23 September 2020.

RWG&A appreciates the opportunity to be of service and has enjoyed working with UE on this project. If you have any questions or if we may be of further service, please contact us.

Sincerely, R. W. GILLESPIE & ASSOCIATES, INC.

Marc R. Grenier, P.E. Senior Geotechnical Engineer

MRG:sf

Submitted in duplicate and via email in Adobe PDF format

G:\PROJECTS\0500\0515\0515-187\Report\2020-12-28 GI Report 0515-187.docx

Report

of

GEOTECHNICAL ENGINEERING EVALUATION

for

WESTSIDE DRIVE AREA INFRASTRUCTURE IMPROVEMENT PROJECT EXETER, NEW HAMPSHIRE

Prepared for

UNDERWOOD ENGINEERS, INC. PORTSMOUTH, NEW HAMPSHIRE

Prepared by

R. W. GILLESPIE & ASSOCIATES, INC. NEWINGTON, NEW HAMPSHIRE



Marc R. Grenier, P.E. New Hampshire P.E. Serial No. 10615

TABLE OF CONTENTS

1.0 PROJECT DESCRIPTION	1
1.01 Scope of Services	1
2.0 PURPOSE	2
3.0 SUBSURFACE EXPLORATIONS	2
4.0 LABORATORY TESTING	2
5.0 SUBSURFACE CONDITIONS	3
5.01 Subsurface Soils 5.02 Groundwater	3 3
6.0 EVALUATION OF GEOTECHNICAL DATA	4
6.01 General6.02 Proposed Construction6.03 Reuse of Existing Materials6.04 Pavement Design Considerations	4 4
7.0 RECOMMENDATIONS	5
7.01 Site Preparation7.02 Pavement Sections7.03 Storm Drain7.04 Temporary Excavations	6 6
8.0 CLOSURE	8

FIGURES

Figure 1, Locus Map Figure 2, Exploration Location Plan

APPENDIXES

Appendix A, Limitations Appendix B, Exploration Logs Appendix C, Laboratory Test Results

1.0 PROJECT DESCRIPTION

The proposed project consists of improvements to the Westside Drive area in Exeter New Hampshire, which includes Westside Drive, Laperle Avenue, Silvio Drive, Scamman Lane, Tilton Avenue and Blanche Lane. The improvements are anticipated to include new drainage to manage surface and ground water and reconstruction of roadways. The location of the project is illustrated on Figure 1, *Locus Map*. It is understood that the existing streets experience drainage problems attributed to shallow groundwater. It is anticipated that finished grades would be similar to current road surface and the road reconstruction would be either partial or full-depth.

R.W. Gillespie & Associates, Inc.'s (RWG&A's) understanding of the proposed construction is based on communications with you and review of information provided via email on 15 September 2020, which included Figure X, *Westside Drive Kick-Off Meeting*, dated 02 September 2020, which indicates the project's limits and existing public utilities.

1.01 Scope of Services

This geotechnical evaluation was performed to develop site-specific field and laboratory soil data to make geotechnical evaluations for the Westside Drive Area Infrastructure Improvement Project in Exeter, New Hampshire. RWG&A's services were performed in general accordance with RWG&A Proposal No. P-10573GI, dated 16 September 2020. Refer to Appendix A for use and limitations of this report. As performed, RWG&A's scope of services included the following items:

- Reviewed project information and readily available published subsurface information and geologic mapping.
- Reviewed the geotechnical subsurface exploration and sampling program prepared by UE to obtain subsurface information for use in geotechnical evaluations.
- Marked out boring locations in the field prior to drilling. Contacted DigSafe to verify planned exploration locations were clear of underground utilities.
- Arranged to have the explorations made and observation wells installed by a drilling company as a subcontractor to RWG&A. Provided technical monitoring of the exploration activities so that depth, location, and sampling methods could be modified in response to subsurface conditions encountered.
- Performed laboratory tests on soil samples recovered from the subsurface explorations to aid in soil description, and for determination of engineering properties needed for engineering evaluations.
- Evaluated acquired field, office, and laboratory data with respect to the proposed road reconstruction. Emphasis was placed on pavement sections, pavement section drainage, temporary excavation support, subgrade preparation, groundwater control, excavation and backfill, and depth of freezing.

• Prepared this report of geotechnical evaluation presenting the findings, conclusions, and recommendations for design and construction.

2.0 PURPOSE

This evaluation has been limited to consideration of the geotechnical aspects of the proposed Westside Drive Area Infrastructure Improvement Project in Exeter, New Hampshire. The primary purpose of RWG&A's services was to explore subsurface conditions along the existing roads and to evaluate how the encountered conditions might affect drainage, earthwork and roadway reconstruction. In particular, this report identifies geotechnical criteria and construction considerations intended to assist engineers that will design the project and monitor its construction.

3.0 SUBSURFACE EXPLORATIONS

Explorations made for this geotechnical evaluation consisted of nine sampled soil borings designated MW-1 through MW-4, B-2, B-4, B-5, and B-7. The exploration locations and designations were selected by UE. The explorations were drilled on 13 October 2020 by Northern Test Boring, of Gorham, Maine using a track-mounted drill rig. The approximate exploration locations are illustrated on Figure 2, *Exploration Location Plan*. The as-drilled boring locations were marked in the field for survey location by the project surveyor.

The explorations were advanced with solid stem augers to depths of about 9 to 10.5 feet below local ground surface. In general, split-barrel sampling with standard penetration testing was performed continuously in the test borings. The samples were taken in accordance with *ASTM D1586, Standard Test Method for Penetration Test and Split-Barrel Sampling of Soils*. Grab samples of existing base material were obtained from auger cuttings in the upper 1 foot of material at select boring locations. Groundwater observation wells were installed at the locations designated MW-1 through MW-4. Please refer to Appendix B for details of the observation wells.

Exploration activities were coordinated by RWG&A. Soils were visually described in accordance with *ASTM D2488, Standard Practice for Description and Identification of Soils (Visual-Manual Procedure)*. Logs of the explorations are attached as Appendix B, *Exploration Logs*. Stratification lines shown on the exploration logs represent the interpreted boundaries between the different soil types; the actual transitions may be gradual and vary over short distances.

4.0 LABORATORY TESTING

Laboratory testing consisting of 8 particle-size analyses with natural moisture content determinations was performed on representative samples of base material recovered from the explorations. Particle-size distribution curves are presented in Appendix C, *Laboratory Test*

Results. Moisture content test results are shown on the exploration logs. The tests were performed in general accordance with the following methods and procedures:

- ASTM D2216 19, Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass.
- ASTM D6913/6913M 17, Standard Test Methods for Particle-Size Distribution (Gradation) of Soils Using Sieve Analysis.

The above tests were conducted at the RWG&A soil and materials testing laboratory in Biddeford, Maine, which is accredited by the American Association of State Highway and Transportation Officials (AASHTO) for the tests performed.

5.0 SUBSURFACE CONDITIONS

5.01 Subsurface Soils

In general, the conditions encountered in the explorations consisted of asphalt pavement over fill underlain by naturally deposited soils. Naturally deposited soils varied by location, consisting of sands, silts and clays. An organic deposit was observed in MW-1 from 2 to 5 feet below ground surface. Refer to the Appendix B, *Exploration Logs*, for information about subsurface conditions at specific locations.

<u>Asphalt</u>: Measured pavement thicknesses varied from about 2 to 8 inches. The asphalt pavement was underlain by base materials at each boring location.

<u>Base Materials</u>: The base materials directly below the pavement generally consisted of silty sand with sub-rounded to sub-angular gravel. The base material thickness ranged from about 5 to 36 inches.

<u>Subgrade Soil</u>: The materials encountered below the fill consisted of naturally deposited soils consisting of silt and clay with varying amounts of sand. Peat and organic deposits about 2 to 2.5 feet thick were observed below the fill at MW-1 and B-4 and 2 to 4-inch thick layers of organic matter was observed in naturally deposited materials in boring B-2. The naturally deposited silts and sand were described as very loose to medium dense and the naturally deposited clays were medium stiff to stiff. The naturally deposited soils extended to the boring termination depths

5.02 Groundwater

Free water was observed in most of the explorations at depths ranging from about ground surface to a depth of about 9.3 feet below local ground surface at the time of drilling. The absence of free water data on the exploration logs implies free water was not observed during these explorations but does not necessarily mean that groundwater would not be encountered at these locations and at the depths explored in the future. Groundwater levels will fluctuate due to season, snowmelt, temperature, rainfall, nearby utilities, and construction activity on the area; therefore, water levels during and following construction will vary from those observed in the explorations.

6.0 EVALUATION OF GEOTECHNICAL DATA

6.01 General

Engineering evaluations for this project are based on the subsurface explorations, laboratory testing, and the design information currently available to RWG&A. The engineering evaluations that follow should be reviewed by RWG&A to confirm their continued applicability should the project design be modified.

6.02 Proposed Construction

Based on discussions with UE, it is understood that the Town of Exeter is planning to construct drainage improvements, either new or replacement of existing drainage, and will be performing either partial or full depth reconstruction of the pavement section. It is anticipated that new and replacement storm drain depth of cover is anticipated to be about 6 feet.

6.03 Reuse of Existing Materials

The gradation test results from base material samples recovered do not meet the requirements of NHDOT Standard Specification *Section 304 Aggregate Base Course* but might meet the requirements of NHDOT Standard Specification *Section 306 Reclaimed Stabilized Base* after pulverizing and mixing with existing asphalt. Particle size distribution test results indicate the gravel fraction of the in-place base would need to be increased by about 20 percent in order to meet *Section 306- Reclaimed Stabilized Base*. It appears that the pulverized asphalt might need to be supplemented with imported NHDOT #467 stone.

It is recommended that test areas be selected and pulverized during construction. The blend from the test areas should be tested and evaluated for conformance with the project technical specifications and to determine whether additional materials (such as crushed stone) are needed to meet material requirements.

6.04 Pavement Design Considerations

Based on RWG&A's experience with the anticipated subgrade and published information, a subgrade resilient modulus value of 3,000 pounds per square inch is recommended for pavement design. Traffic loading was estimated from NHDOT Bureau of Traffic's traffic reports for nearby similar volume roads. The average daily traffic (ADT) for the roadway is estimated to be about 300 to 400 vehicles per day and 2% truck traffic was used for the evaluation.

AASHTO methods for flexible pavement design were used to evaluate the planned pavement section. An initial pavement serviceability index of 4.5 for new pavement, a terminal pavement serviceability index of 2.5, and 20-year service life were used in the evaluations. A pavement serviceability index, which is an indicator of the level of service provided to users and is related to cracking, patching, and rut depth. The serviceability index of 2.5 corresponds to 85 percent of drivers/ passengers rating the pavement and ride condition as unacceptable. UE should verify the

traffic loading, service life, and terminal serviceability index used in the evaluations are appropriate and notify RWG&A if modifications are needed.

Depth of freezing for the area was calculated with the ModBerg Version 99.2.0 computer program. The design air freezing index is about 1,046 Fahrenheit degree - days. The calculated depth of freezing for snow free condition is 56 inches (Note: 4.7 feet).

Full depth frost protection of pavements would require a total pavement section of about 56 inches, which would be cost prohibitive. Thinner pavement sections, including reinforced sections, are considered more frost-susceptible than thicker sections constructed of the same non-frost susceptible materials. It is typical practice in the New England region to provide partial depth frost protection for pavements with the expectation that some frost heaving will occur.

7.0 RECOMMENDATIONS

7.01 Site Preparation

- 1. It is anticipated the existing roadway section and base gravel would be reclaimed and used as embankment fill below the planned pavement section. Depending on the actual reclaimed asphalt concrete gradation, the reclaimed material might be suitable for reuse in lieu of the crushed gravel base course. Embankment fill and reclaimed asphalt concrete should be placed and compacted in accordance with current NHDOT requirements.
- 2. A peat layer was encountered between the existing fill and naturally deposited soils at borings B-4 and MW-1. Peat and organic material might be encountered at other locations intermediate of boring locations. Where in-situ fill is present at design subgrade level, test pits should be dug through the fill and into naturally deposited soil to verify the absence of topsoil, peat, and organic material. Where encountered within 6 feet of subgrade level, all topsoil and organic matter should be removed below the design pavement section horizontal limits and replaced with compacted sand course materials.
- 3. It is recommended the pavement section subgrade be compacted by several passes with a smooth drum roller and a thorough evaluation of the subgrade be undertaken. The evaluation should include proof-rolling of the subgrade area with a loaded tandem axle dump truck weighing not less than 15 tons to aid in identifying soft pockets and areas of excess yielding. Proof-rolling should occur prior to the placement of the subbase course in the pavement section. Proof-rolling may be performed using two passes in the direction of traffic lanes. Soft spots, unsatisfactory soils, areas of excessive pumping, or rutting in excess of 1 inch in depth should be excavated and replaced with suitable compacted fill.

Wet or saturated subgrades should not be proof-rolled. Prior to paving, the exposed subbase or base course should also be proof-rolled. Proof-rolling should not be performed over culverts, pipes, conduits, or other underground construction that might be damaged by the proof-roller.

7.02 Pavement Sections

4. The roadway should be provided with the following pavement sections. Flexible pavements were developed using AASHTO design methods. Materials and placement methods should meet the current New Hampshire Department of Transportation requirements. This design conforms with the Town of Exeter minimum section thickness required for road construction.

Component	Thickness in Inches
Surface Course (NHDOT Type 12 mm)	1.5
Binder Course (NHDOT Type 19 mm)	2.5
Crushed Gravel (NHDOT 304.3) or Reclaimed Base (NHDOT 306)	6
Gravel Subbase (NHDOT 304.2)	12
Total	22

7.03 Storm Drain

- 5. Storm drain trench excavations will occur primarily in granular fill and/or naturally deposited soils including silty sands, silts and clays. The fill and sand should generally meet the project plan and technical specification requirements for use as trench backfill. If crushed stone is used to bed and/or cover the storm drain or other new utility pipes (note: or repair utilities damaged by the proposed water main installation), then filter fabric should be wrapped around the crushed stone to separate it from the fill and/or naturally deposited soils.
- 6. At the time of drilling, free water was observed in several of the explorations above anticipated excavation depths. It is recommended that the Contractor observe water levels along the alignments just prior to construction with test pits to assess dewatering requirements.
- 7. Construction dewatering should be provided as-needed to reduce disturbance of the subgrade soils and instability of the excavations, and to complete the work in-the-dry. In RWG&A's opinion, construction dewatering with open pumping and sumps should be practicable if free water is less than about 1 to 2 feet above the bottom of the trench excavation at the time of construction. If excavations extend to greater depths below free water, then predrainage with wells or wellpoints might be necessary to maintain stability of the excavations, and to help ensure proper pipe bedding and reduce post-construction settlement of trench backfill.

Dewatering requirements will vary depending upon groundwater levels encountered during construction, and the predominant soil exposed on the sides and bottom of excavations. It should be anticipated that excavations might encounter pockets or layers of free-draining granular soil or the bedding and cover of other utilities, which could contribute significant amounts of water into the water main trenches. In the event that significant zones of free-draining materials are encountered, it might be necessary to temporarily employ additional dewatering pumps or other measures.

- 8. It is anticipated that the Contractor will design, install, operate, and maintain the dewatering system. Details of the proposed dewatering system should be submitted to UE to allow for review of its components prior to installation. The submittal should provide information on sources of power, locations of sumps and wells, pump types, and other features, including filtering methods, to reduce pumping of soils and discharge points.
- 9. RWG&A recommends that all fill placed within 2 feet of finished grade in paved areas be compacted to at least 95 percent of the maximum dry density, as determined by ASTM Standard D 1557 Test Method for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft³ (2,700 kN-m/m³)), (ASTM D1557). Trench backfill from the top of pipe cover and up to the bottom of pavement subbase, or ground surface in unpaved areas, should be compacted to a minimum of 92 percent of ASTM D1557. Heavy self-propelled compaction equipment should not be used until the pipe depth of cover is a minimum of 3 feet.

When a trench box is used, it can be difficult to compact backfill materials. Sometimes there might be a tendency to remove the trench box after the pipe has been installed and then end-dump backfill material with little compaction. Relative compaction to less than recommended herein could result in settlement over the pipe trench years after the drainage system is installed.

In paved areas, overfilling and re-leveling (i.e., shimming) is not desirable. Often, paving of the wearing surface is delayed over a winter to allow for "traffic compaction." Traffic compaction may reduce, but does not necessarily prevent, swales from developing over the trenches. Post-construction settlement over utility trenches can significantly increase pavement maintenance and repair costs. If the above conditions are unacceptable, then a systematic compaction effort must be applied to all the trench backfill.

7.04 Temporary Excavations

10. Soils encountered below surficial asphalt consisted of fill, peat and organic materials, and naturally deposited silty sand and silt and clay with varying amounts of sand. It is anticipated that excavations can be accomplished using sloped, open-cut techniques. It is also anticipated that dewatering can be accomplished using sumps and open pumping methods for most of the project area, but pre-drainage might be needed locally.

The Contractor should be aware that slope height, slope inclination, and excavation depths (including utility trench excavations) should in no case exceed those specified in local, state, or federal safety regulations (e.g., OSHA Health and Safety Standards for Excavations, 29 CFR Part 1926, or successor regulations). Such regulations are strictly enforced and, if they are not followed, the Owner, Contractor, and/or earthwork and utility subcontractors could be liable for substantial penalties.


As a safety measure, it is recommended that all vehicles and spoil piles be kept a minimum lateral distance from the top of excavations equal to no less than 100 percent of the slope height. Exposed slope faces should be protected against the elements.

8.0 CLOSURE

This report has been prepared for specific application to the Westside Drive Area Infrastructure Improvement Project in Exeter, New Hampshire, and for the exclusive use of UE. This work has been completed in accordance with generally accepted soil engineering practices. No other warranty, expressed or implied, is made. In the event that any changes are made in the nature, alignment, or depths of the project, the conclusions and recommendations of this report should be reviewed by RWG&A.

The recommendations presented are based on the results of widely spaced explorations. The nature of variations between explorations may not become evident until construction. If variations are encountered, it will be necessary for RWG&A to re-evaluate the recommendations presented in this report. RWG&A requests an opportunity for a general review of the final design and specifications in order to determine that the design recommendation presented herein have been interpreted in the manner in which they were intended.






SOURCE: USGS 7.5-MINUTE TOPOGRAPHIC QUADRANGLE OF EXETER, NH, DATED 2018. FIGURE 1 LOCUS MAP GEOTECHNICAL ENGINEERING EVALUATION WESTSIDE DRIVE AREA INFRASTRUCTURE IMPROVEMENT PROJECT EXETER, NEW HAMPHIRE

DECEMBER 2020

PROJECT NO. 0515-187



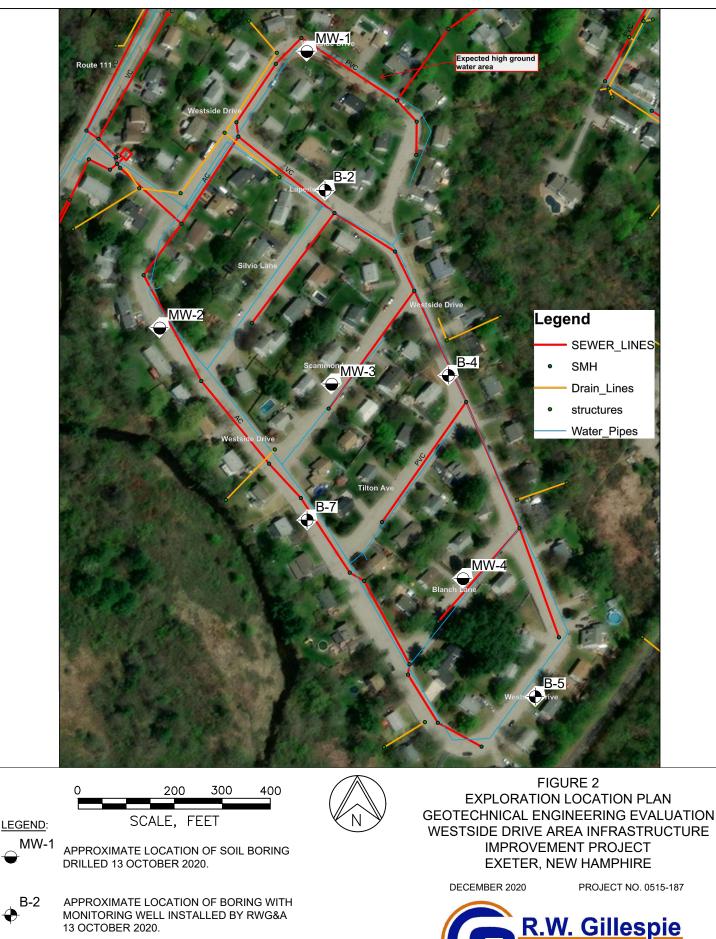

SOURCE:

 \bullet

DRAWING NO. X, TITLED "WESTSIDE DRIVE KICKOFF MEETING", PREPARED BY UNDERWOOD ENGINEERS, DATED 9.2.20.



APPENDIX A

LIMITATIONS

Geotechnical Engineering Evaluation Westside Drive Area Infrastructure Improvement Project Exeter, New Hampshire

LIMITATIONS

This evaluation has been limited to consideration of the geotechnical aspects of the proposed Westside Drive Area Infrastructure Improvement Project in Exeter, New Hampshire. The purpose of the evaluation was to obtain information regarding subsurface conditions on which to base recommendations about the geotechnical aspects of design and construction of pavement sections and storm drain. This report is not a technical specification nor is it intended to be used as a specification for bidding or building the project.

This geotechnical evaluation might also aid Contractors responsible for construction of the planned roadway and storm drain. However, the recommendations and comments provided hereinafter are not intended to be instructions or directives to the project Contractors. The project Contractors must evaluate construction issues encountered in the work on the basis of their experience with similar projects taking in to account their own methods and procedures.

RWG&A has not considered the construction from a worker safety perspective. Construction safety is the responsibility of the project Contractor, who is also solely responsible for the means, methods, and sequencing of construction operations. RWG&A is providing this information as a service to UE. Under no circumstances should this information be interpreted to mean that RWG&A and/or UE are assuming responsibility for construction site safety or the Contractor's activities; such responsibility is not being implied and should not be inferred.

RWG&A's services excluded any environmental site assessment relative to oil and hazardous materials or evidence of a potential release or threat of oil or hazardous materials on, below, or around the site. (Note: any statement in this report, or on the exploration logs, regarding odors or unusual or suspicious conditions is for informational purposes only and is not intended to constitute an environmental assessment).

APPENDIX B

EXPLORATION LOGS

Geotechnical Engineering Evaluation Westside Drive Area Infrastructure Improvement Project Exeter, New Hampshire RWG&A, Inc. soil descriptions are based on the following criteria. Descriptive terminology is used to denote the grain size and percentage of each component. The soil descriptions are based on visual-manual classification procedures, Standard Penetration Test results, and the results of laboratory testing on selected soil samples, where available. The Unified Soil Classification Group Symbol will be indicated in capital letters.

COMPONENT DEFINITIONS BY GRADATION SIEVE LIMITS

Materials	Definitions	Fractions	Upper	Lower
Boulders	Material too large to pass through an opening 12 in. square.			
Cobbles	Material passing through a 12 in. opening and retained on the 3 in. sieve.			
Gravel	Material passing the 3 in. sieve and retained on 1/4" (No. 4 sieve).	Coarse Fine	3 in. 3/4 in.	3/4 in. 1/4 in.
Sand	Material passing the No. 4 sieve and retained on the No. 200 sieve.	Coarse Medium Fine	No. 4 (1/4") No. 10 (1/8") No. 40 (1/32")	No. 10 (1/8") No. 40 (1/32") No. 200
Silt	Material passing the No. 200 sieve which is usually non- plastic in character and exhibits little or no strength when air dried.		No. 200	
Clay	Material passing the No. 200 sieve which can also be made to exhibit plasticity within a certain range of moisture contents and which exhibits considerable strength when air dried.		No. 200	

SOIL DESCRIPTION

General

Soils are described as to the Unified Soil Classification Systems Group Symbol, density or consistency, color, grain size distribution and other pertinent properties such as plasticity and dry strength. The RWG&A order of descriptors is as follows:

1. USCS Group Name and Symbol, or Fill

2. Density or Consistency

- 3. Moisture
- 4. Grain Size & Constituent percentages

5. Other pertinent descriptors

6. Color

DESCRIPTIVE TERMINOLOGY DENOTING COMPONENT PROPORTIONS

Descriptive Terms	Range of Proportions
Noun (major component) Adjective (secondary component) Some (third component) Little (second or third component) Few (second or third component) Trace With	∃50% 20 - 50% 25 - 45% 15 - 25% 5 - 15% 0 - 5% Amount of component not determined. Used as a conjunction only. Does not indicate
	component percentile

OTHER DESCRIPTIVE TERMS

Where appropriate, geological classifications are also used (Glacial Till, etc.)

TYPICAL DESCRIPTIONS

SAND WITH SILT (SP-SM): Medium dense, moist, coarse to medium sand, few silt, brown. FILL; Loose, dry, fine sand, some gravel and silt, with brick and concrete fragments, dark brown. SILTY CLAY (CL); Very stiff, moist, silty clay, olive-brown.

DENSITY OR CONSISTENCY OF SOILS COHESIVE SOILS

Consistency of Cohesive Soils	Standard Penetration Test (Blows Per Foot) (N)	Undrained Shear Strength (TSF)
Very Soft	0 - 2	Below 0.13 (250 psf)
Soft	2 - 4	0.13 to 0.25 (to 500 psf)
Medium	4 - 8	0.25 to 0.5 (to 1,000 psf)
Stiff	8 - 15	0.5 to 1.0 (to 2,000 psf)
Very Stiff	15 - 30	1.0 to 2.0 (to 4,000 psf)
Hard	Over 30	over 2.0 (over 4,000 psf)

Consistency of cohesive soils is based upon field vane shear, torvane, or pocket penetrometer, or laboratory vane shear or Unconsolidated-Undrained Triaxial Compression tests. Consistency of cohesive soils is based upon the Standard Penetration test when no other data is available.

COHESIONLESS SOILS

Density of Cohesionless Soils	Standard Penetration Test (Blows per Foot) (in)
Very Loose	0 - 4
Loose	4 - 10
Medium Dense	10 - 30
Dense	30 - 50
Very Dense	over 50

PENETRATION RESISTANCE

STANDARD PENETRATION TEST (ASTM D1586) - a 2.0-inch diameter, 1-3/8 inch inside diameter split barrel sample is driven into soil by means of a 140-pound weight falling freely through a vertical distance of 30 inches. The total number of blows required for penetration from 6 to 18 inches is the Standard Penetration Resistance (N).

COBBLES AND BOULDERS

The percentage of cobbles and boulders is estimated visually where possible.

Descriptive Term	Estimated Percentage
Very Few	0 - 10%
Few	10 - 25%
Common	25 - 40%
Numerous	40 - 50%

If the percentage cannot be determined, as in a typical test boring, then use "with" to indicate the presence of cobbles and/or boulders. (i.e., gravelly sand with cobbles and boulders).

FILLS

The following terminology is used to denote size range of man-made materials within fill deposits:

Size Range	Soil Terms
<no. 200="" sieve<="" td=""><td>Silt - size</td></no.>	Silt - size
No. 200 to 1/4 in.	Sand - size
1/4 in. to 3 in.	Gravel - size
3 in. to 12 in.	Cobble - size
>12 in.	Boulder - size

SUPPLEMENTAL SOIL DESCRIPTION TERMINOLOGY

Term	Example	
Seam Layer Occasional Frequent Interbedded Varved	Typically 1/16 to 1/2 inch thick Greater than 1/2 inch thick One or less per foot of thickness More than one per foot of thickness Alternating soil layers of different composi Alternating thin seams of silt and clay	1/4 inch sand seams 2-inch sand layers
Mottled	Variations in color	

© R. W. Gillespie & Associates, Inc. 2008-12-17

\\saco\data\MASTERS\FIELD\2008-12-17 Soil Description and Classification.doc

			R.W.	Gillespie sociates • Geotechnical Engineering • Environmental Consulting • Materials Testing Services	Boring Log: B-2	0				
	5	\mathbf{J}	& As	• Materials Testing Services	Total Depth (ft):	9				
RW Loc Clie RW Boi Boi	/G8 catic ent: /G8 ring ring	A F on: I Ur A F Loc Ab	Project Exeter, Iderwo Represe cation: andonr	No. 0515-187 New Hampshire od Engineers, Inc. entative: Serena Pape See Exploration Location Plan nent Method: Cuttings, Sand & Cold Patch	Sheet 1 of 1 Drilling Co.: Northern 7 Drill Rig: Diedrich D50 Driller Rep.: Mike Nado Date Started: 10/13/202 Date Completed: 10/13 Surface Elevation: Drilling Method: SSA Casing Type: N/A	eau 20	Ū			_
DEPTH, FT.	SYMBOL		SAMPLE NUMBER	DESCRIPTION OF MATERI		SAMPLE RECOVERY, IN.	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS
0			S-1	∖ASPHALTIC PAVEMENT (4 inches) FILL; Moist, coarse to fine sand, few gravel, some	silt light brown	24	4	5	8	GS MC
	ĤŨ	/	01	SILT AND CLAY WITH SAND (ML); Very loose	<u> </u>	24	3 2	5		WIC
			S-2	fine sand and clay, gray.		24	2 3 2	3		
- 5 -							2	_		
5		7	S-3	2 inch lower of organize		15	1 1	3	30	GS MC
			S-4	2-inch layer of organics.		24	1 2	7		
		7		-4-inch layer of organics. SILTY CLAY (CL); Medium stiff, wet, clay, some	silt_gray_brown		1 1	-		
				Bottom of Exploration at 9'; Not refusal.	sin, gray-brown.		2 5			
- 10 -							5 <u>7</u>			
- 15 -	1									
- 20 -	-									
- 25 -										
<u> </u>	s:									

			R.W.	Gillespie • Geotechnical Engineering	Boring Log: B-4					
	5	Ĵ	& As	Gillespie sociates • Geotechnical Engineering • Environmental Consulting • Materials Testing Services	Total Depth (ft):	10.4				
				Ű	Sheet 1 of 1					_
RW Loc Clie RW Bor Bor	ÍG8 catic ent: /G8 ring ring	A F on: I Ur A F Loo Ab	Project Exeter, nderwo Represe cation: andoni	No.0515-187INew HampshireIod Engineers, Inc.Ientative:Serena PapeISee Exploration Location PlanSent Method:nent Method:Cuttings, Sand & Cold PatchI	Drilling Co.: Northern T Drill Rig: Diedrich D50 Driller Rep.: Mike Nade Date Started: 10/13/202 Date Completed: 10/13 Surface Elevation: Drilling Method: SSA Casing Type: N/A	eau 20	C			
						ż				
DEPTH, FT.	SYMBOL	SAMPLES	SAMPLE NUMBER	DESCRIPTION OF MATERIA	AL	SAMPLE RECOVERY,	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS
0	***		S-1	ASPHALTIC PAVEMENT (4.5 inches).		18	15	25	7	GS
			0.0	FILL; Coarse to fine sand, little gravel, little silt, bro	own.	•	14 11 10	•		MC
	***	7	S-2	DEAT (DT). Vor loos wat silt madium to fine as	nd with organize black	9	<u>10</u> 9 4	6		
- 5 -	10000		S-3	PEAT (PT); Very loose, wet, silt, medium to fine sa	_	8	2 2 1	11		
		7	S-4	SAND WITH SILT AND GRAVEL (SP-SM); Med to fine sand, trace to few gravel, few silt, light gray.		10	1 10	17	20	GS MC
			S-5	SANDY SILT (ML); Medium dense, wet, silt, some tan-gray.	e medium to fine sand,	9	<u>10</u> 8 9	18		WIC
- 10 -		7	•••	Becomes tan.		5	8	10		
10				Bottom of Exploration at 10.4'; Not refusal.			<u>8</u> 4 8			
							10 <u>8</u>			
- 15 -										
	-									
- 20 -										
- 25 -										
30 Note	s:						1	l		

			R W	Gillespie • Geotechnical Engineering	Boring Log: B-5					
	5]]	& As	Gillespie sociates • Geotechnical Engineering • Environmental Consulting • Materials Testing Services	Total Depth (ft):	9				
				°	Sheet 1 of 1					_
RW Loc Clie RW Boi Boi	ÍG& catic ent: /G& ring ring	A Fon: Ui A F Lo Ab	Project Exeter, nderwo Represe cation: pandonr	od Engineers, Inc. entative: Serena Pape See Exploration Location Plan	Drilling Co.: Northern T Drill Rig: Diedrich D50 Driller Rep.: Mike Nade Date Started: 10/13/202 Date Completed: 10/13 Surface Elevation: Drilling Method: SSA Casing Type: N/A	eau 20	Ū			
DEPTH, FT.	SYMBOL		SAMPLE NUMBER	DESCRIPTION OF MATER		SAMPLE RECOVERY, IN.	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS
0			S-1	ASPHALTIC PAVEMENT (7 inches).	1 1141 - 114 1	45	4	7	5	GS
		7	3-1	\FILL; Moist to wet, coarse to fine sand, little grave SILTY CLAY (CL); Medium stiff, moist, clay, son		15	4 2	7		MC
			S-2	medium to fine sand seams, gray-brown with yellow	w-tan seams.	18	5 <u>6</u> 5	10		
				SILT WITH CLAY AND SAND (ML); Medium d varying amounts of clay and fine sand.	ense, wet, silt, with		4			
- 5 -		7	S-3	varying amounts of enzy and thie said.		9	6 <u>8</u> 4	9		
			S-4			24	4 6 3	9		
		7		SILTY CLAY (CL); Stiff, wet, clay, some silt, freq	uent 1/16" fine sand	27		0		
	HHH	Н		seams, medium orange gray with orange seams.			<u>3</u> 5 5			
- 10 -				Bottom of Exploration at 9'; Not refusal.			4 <u>5</u>			
- 15 -	-									
- 20 -										
- 25 -										
30										
Note	s:									

			R.W.	Gillespie • Geotechnical Engineering	Boring Log: B-7					
• Geotechnical Engineering • Environmental Consulting • Materials Testing Services • Geotechnical Engineering				9						
Project Name: Westside Drive AreaSheet 1 of 1RWG&A Project No. 0515-187Drilling Co.: Northern TLocation: Exeter, New HampshireDriller Rep.: Mike NadeClient: Underwood Engineers, Inc.Date Started: 10/13/202RWG&A Representative: Serena PapeDate Completed: 10/13/Boring Location: See Exploration Location PlanSurface Elevation:Boring Abandonment Method: Cuttings, Sand & Cold PatchDrilling Method: SSAObserved Water Depth: 5'Casing Type: N/A				eau 20	-			_		
DEPTH, FT.	SYMBOL		SAMPLE NUMBER	DESCRIPTION OF MATERIA		SAMPLE RECOVERY, IN.	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS
	XXX 111		S-1	ASPHALTIC PAVEMENT (8 inches). FILL; Coarse to fine sand, little gravel, little silt, bro	own.	21	4	7	6	GS
				SAND WITH SILT (SP-SM); Loose, moist, coarse			3 4			MC
		7	S-2	gravel, trace to few silt, orange-brown.		12	<u>4</u> 5	10		
- 5¥			S-3			45	6 4	4		
-			3-3	SILTY SAND (SM); Loose, wet, medium to fine sa orange-brown.	nd, little to some silt,	15	<u>3</u> 3	4		
			S-4			20	3 3 2 2 2 2 3	6		
		SILTY CLAY (CL); Medium stiff, wet, clay, some silt, gray-brown.					<u>2</u> 2			
- 10 -	Bottom of Exploration at 9'; Not refusal.						3 3			
10							<u>3</u>			
- 15 -										
- 20 -										
- 25 -										
<u>30</u> Note	s:									

				Gillocpio • Geotechnical Engineering	Boring Log: MW-1					
• Geotechnical Engineering • Environmental Consulting • Materials Testing Services					10.2					
			u Ac	Ŭ	Sheet 1 of 1					
Project Name: Westside Drive AreaDrilling Co.: Northern TRWG&A Project No. 0515-187Drilling Co.: Northern TLocation: Exeter, New HampshireDriller Rep.: Mike NadeClient: Underwood Engineers, Inc.Date Started: 10/13/202RWG&A Representative: Serena PapeDate Completed: 10/13Boring Location: See Exploration Location PlanSurface Elevation:Boring Abandonment Method: Observation Well InstalledDrilling Method: SSAObserved Water Depth: 0.1' Above GroundCasing Type: N/A					eau 20	Ū				
						RECOVERY, IN.				
DEPTH, FT.	SYMBOL	SAMPLES	SAMPLE NUMBER	DESCRIPTION OF MATERIAL			BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS
- 0 <u>¥</u>		7	S-1	ASPHALTIC PAVEMENT (2 inches). FILL; Moist to wet, coarse to fine sand, some silt, few gravel, gray-brown.			17 6 5	11		
		7	S-2	PEAT (PT); Very loose, wet, silt, with fine sand and organics, black.			4 2 2	4		
- 5 -			S-3	SAND WITH SILT AND GRAVEL (SP-SM); Medium dense, wet, coarse			2 2 WOH	11		
			S-4	to fine sand, little to some silt, gray-tan. \neg SILTY SAND (SM); Medium dense, wet, fine sand, some silt, gray, brown			5 6	11	29	GS MC
			S-5	And orange. SANDY SILT (ML); Medium dense, wet, silt, few fine sand.			<u>5</u> 4 5 6	9		
- 10 -				SILTY SAND (SM); Loose, wet, coarse to fine sand, some silt, gray-orange with orange.			<u>5</u> 1			
	-			Bottom of Exploration at 10.2'; Not refusal.			4 5 <u>6</u>			
	-									
- 15 -	-									
- 20 -										
- 25 -										
 Note	s:									

			R W	Gillespie • Geotechnical Engineering	Boring Log: MW-2					
	5)/	& As	Gillespie sociates • Geotechnical Engineering • Environmental Consulting • Materials Testing Services	Total Depth (ft):	10.5				
Dre				°	Sheet 1 of 1					_
RW Loc Clie RW Boi Boi	/G8 catic ent: /G8 ring ring	A F on: Ui A F Lo Ab	Project Exeter, nderwo Represe cation: andoni	No. 0515-187 New Hampshire od Engineers, Inc. entative: Serena Pape See Exploration Location Plan nent Method: Observation Well Installed	Drilling Co.: Northern T Drill Rig: Diedrich D50 Driller Rep.: Mike Nade Date Started: 10/13/202 Date Completed: 10/13 Surface Elevation: Drilling Method: SSA Casing Type: N/A	eau 20	Ū			
DEPTH, FT.	SYMBOL	SAMPLES	SAMPLE NUMBER	DESCRIPTION OF MATERI	AL	SAMPLE RECOVERY, IN.	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS
0	***		S-1	ASPHALTIC PAVEMENT (6 inches).	1	10	8	11		
	▒	7		FILL; Moist, medium to fine sand, few to little grav medium brown.	vel, trace to few silt,		7 4			
	Ĩ	7	S-2	SILTY SAND TO SANDY SILT (SM/ML); Wet, 1	nedium to fine sand and	12	<u>3</u> 3	15		
_			S-3	silt, yellow-brown.		18	9 6	5		
- 5 -		7		CLAYEY SILT TO SILTY CLAY (CL-ML); Med	ium stiff to stiff, wet, silt	10	<u>3</u> 2	Ŭ		
		7	S-4	and clay, gray-brown. 6-inch dark brown layer. Becomes stiff.		24	2 3 4	11		
			S-5			14	4 3 6 5 <u>7</u> 4	13		
- 10 -							5 <u>7</u>			
				Bottom of Exploration at 10.5'; Not refusal.			4 6			
							7 <u>12</u>			
- 15 -										
- 20 -										
- 25 -										
_ 30 _										
Note	s:									

				Geotechnical Engineering	Boring Log: MW-3					
	C		<u>κ.νν.</u> ጲΔና	• Environmental Consulting	Total Depth (ft):	10.3				
			G AS	• Materials Testing Services	Sheet 1 of 1					
RW Loc Clie RW Bor Bor	Project Name: Westside Drive AreaDrilling Co.: Northern TRWG&A Project No. 0515-187Drill Rig: Diedrich D50Location: Exeter, New HampshireDriller Rep.: Mike NadeClient: Underwood Engineers, Inc.Date Started: 10/13/202RWG&A Representative: Serena PapeDate Completed: 10/13/Boring Location: See Exploration Location PlanSurface Elevation:Boring Abandonment Method: Observation Well InstalledDrilling Method: SSAObserved Water Depth: 4'Casing Type: N/A					eau 20	0			
DEPTH, FT.					SAMPLE RECOVERY, IN.	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS	
0		7	S-1	ASPHALTIC PAVEMENT (4 inches). FILL; Coarse to fine sand, few to little gravel, few s	silt brown	12	9 9	17		
			S-2			0	8 <u>10</u> 7	13		
∇		7	-			Ū	7	10		
- 5 -		7	S-3	SILTY SAND TO SANDY SILT (SM/ML); Loose orange brown.	, wet, silt and fine sand,	17	6 <u>3</u> 2	4		
			S-4	SAND WITH SILT (SP-SM); Loose to medium de trace to few silt, orange-brown.	nse, coarse to fine sand,	3	3 2 2 2	5		
		/					<u>2</u> 2			
		7	S-5			12	2 3	11	29	GS MC
- 10 -		\mathbb{H}		Bottom of Exploration at 10.3'; Not refusal.			$\frac{4}{4}$			
				Bottom of Exploration at 10.5, Not refusal.			6 5			
	-						<u>5</u>			
	-									
- 15 -										
	-									
	-									
- 20 -										
	-									
	-									
- 25 -	1									
	-									
	-									
30	-									
	30 Views:									


			R.W.	Gillespie sociates • Geotechnical Engineering • Environmental Consulting • Materials Testing Services	Boring Log: MW-4	10.3				
	5)	& As	• Materials Testing Services	Total Depth (ft):	10.5				
RW Loc Clie RW Boi Boi	/G8 catio ent: /G8 ring ring	A F on: Ur A F Loo Ab	Project Exeter, Iderwo Represe cation: andoni	Vestside Drive Area No. 0515-187 New Hampshire od Engineers, Inc. entative: Serena Pape See Exploration Location Plan nent Method: Observation Well Installed Depth: 7'	Sheet 1 of 1 Drilling Co.: Northern Drill Rig: Diedrich D50 Driller Rep.: Mike Nad Date Started: 10/13/202 Date Completed: 10/13 Surface Elevation: Drilling Method: SSA Casing Type: N/A	eau 20	Ū			
DESCRIPTION OF MATERIAL				SAMPLE RECOVERY, IN.	BLOWS PER 6"	SPT-N BLOWS PER FT.	MOISTURE CONTENT %	LAB TESTS		
0	***	7	S-1	\ASPHALTIC PAVEMENT (4 inches). \FILL; Coarse to fine sand, few to little gravel, few	silt brown	9	7 6	9		
			S-2	SILTY SAND (SM); Loose to medium dense, more		17	4 <u>5</u> 5	11		
				sand, some silt, yellow tan. SANDY SILT (ML); Medium dense, moist, silt, so	ome fine sand, gray-		5			
- 5 -			S-3	brown, frequent medium sand seams.		23	6 <u>6</u> 5	18		
		7	S-4	_2-inch silty clay layer. SAND WITH SILT (SP-SM); Medium dense, wet	, sand, trace to few silt,	16	8 10	21		
			S-5	orange-brown.		15	<u>11</u> 7 12	16		
- 10 -		7					9 <u>11</u> 7			
				<u>SILTY CLAY (CL); Stiff, wet, clay, some silt, gray-brown.</u> Bottom of Exploration at 10.3'; Not refusal.			7			
							9 <u>11</u>			
	-									
- 15 -										
	-									
	-									
- 20 -										
	-									
- 25 -										
	-									
	-									
<u>30</u> Note	s:						<u> </u>	1	I	

R.W. Gillespie & Associates, Inc.

APPENDIX C


LABORATORY TEST RESULTS

Geotechnical Engineering Evaluation Westside Drive Area Infrastructure Improvement Project Exeter, New Hampshire

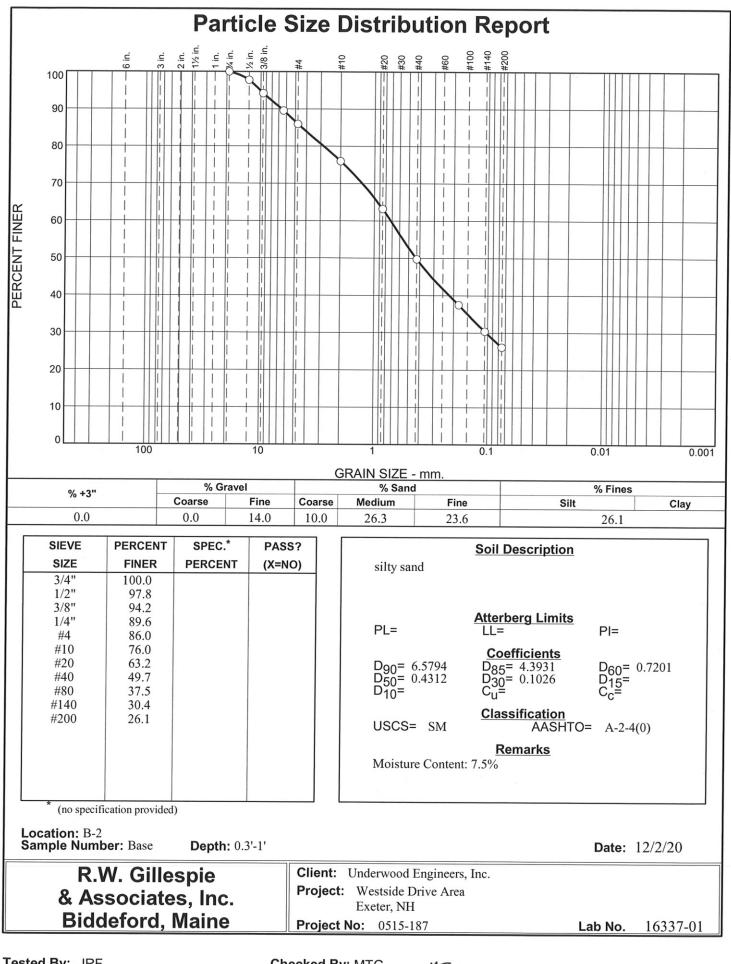


Tested By: JRF

Checked By: MTG MTG

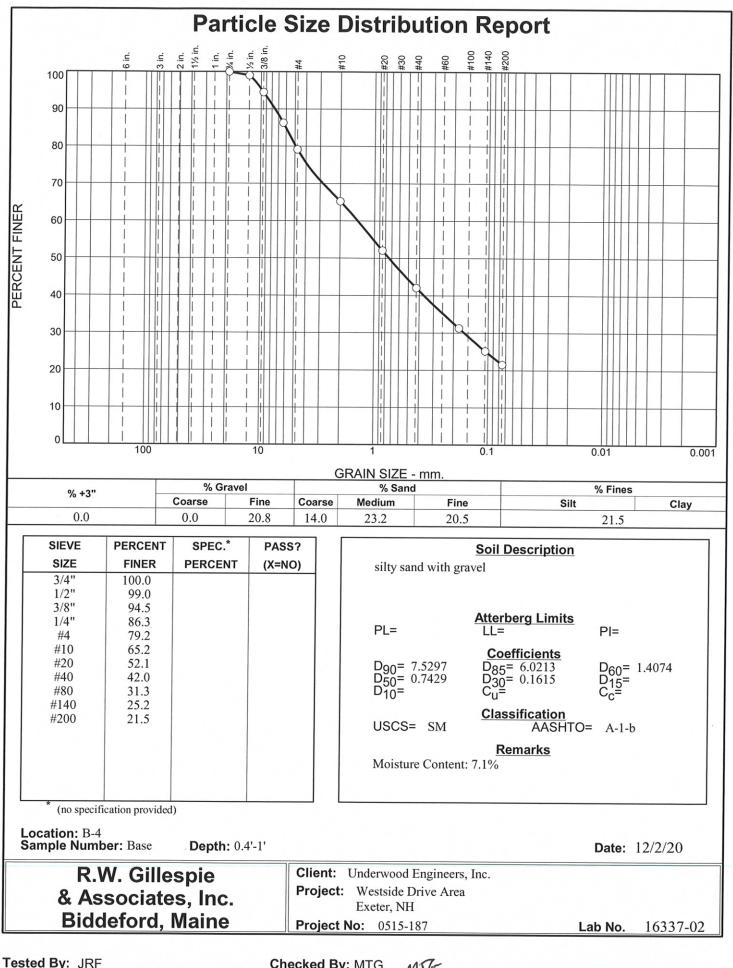



ested	By:	JRF	
00104		0111	

Checked By: MTG MTG

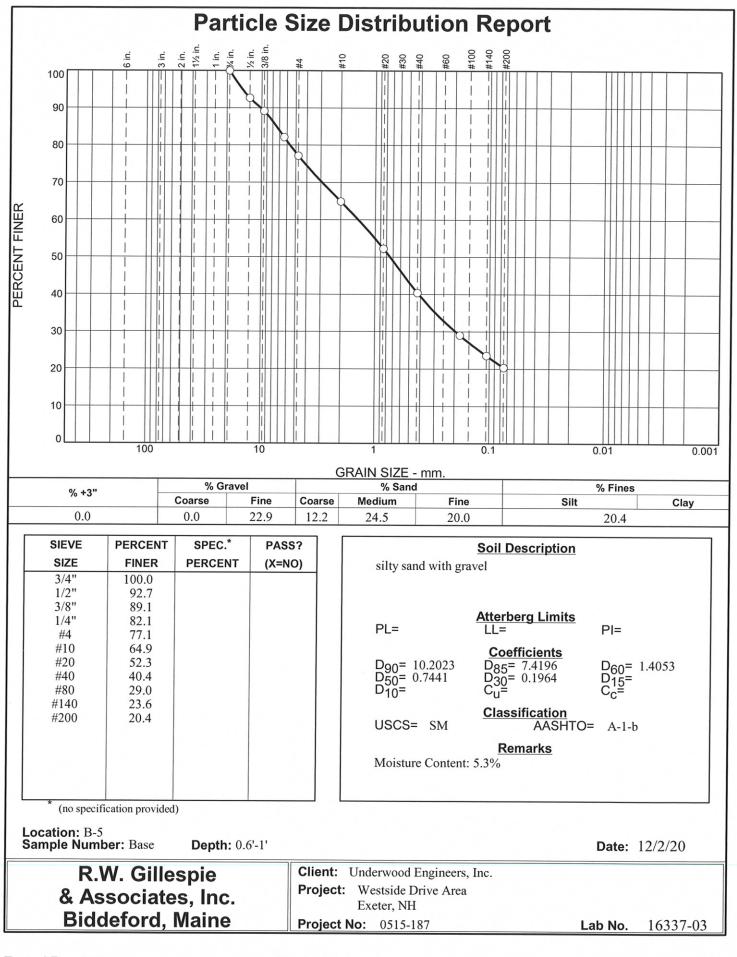


Checked By: MTG

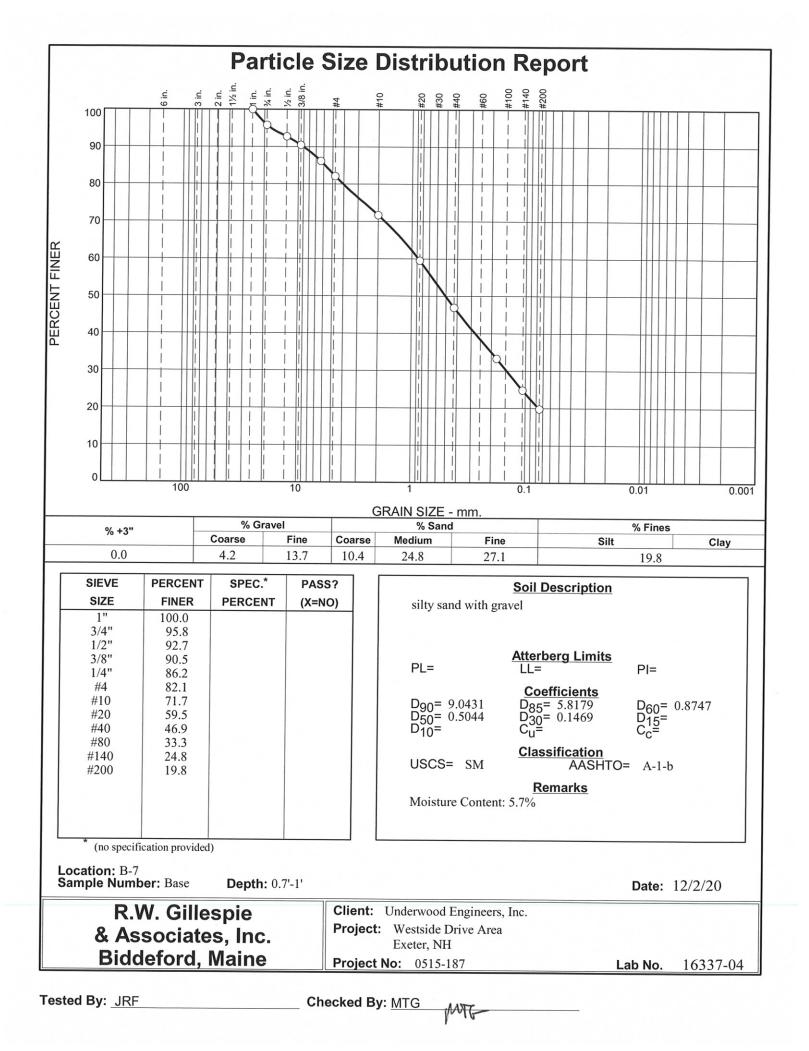

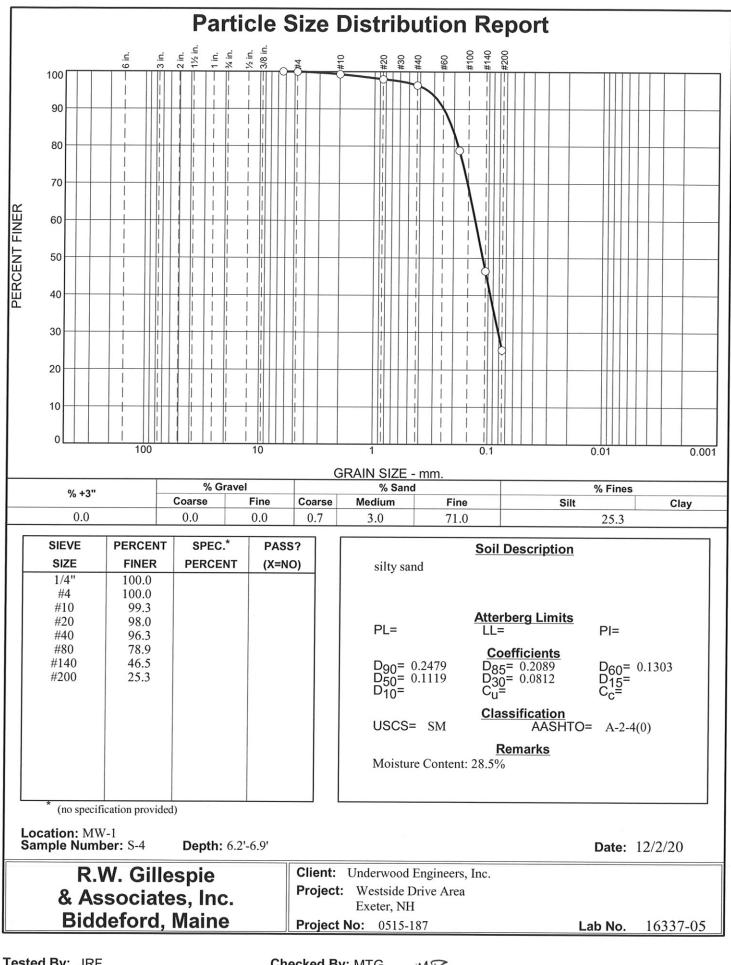


Tested By: JRF


Checked By: MTG

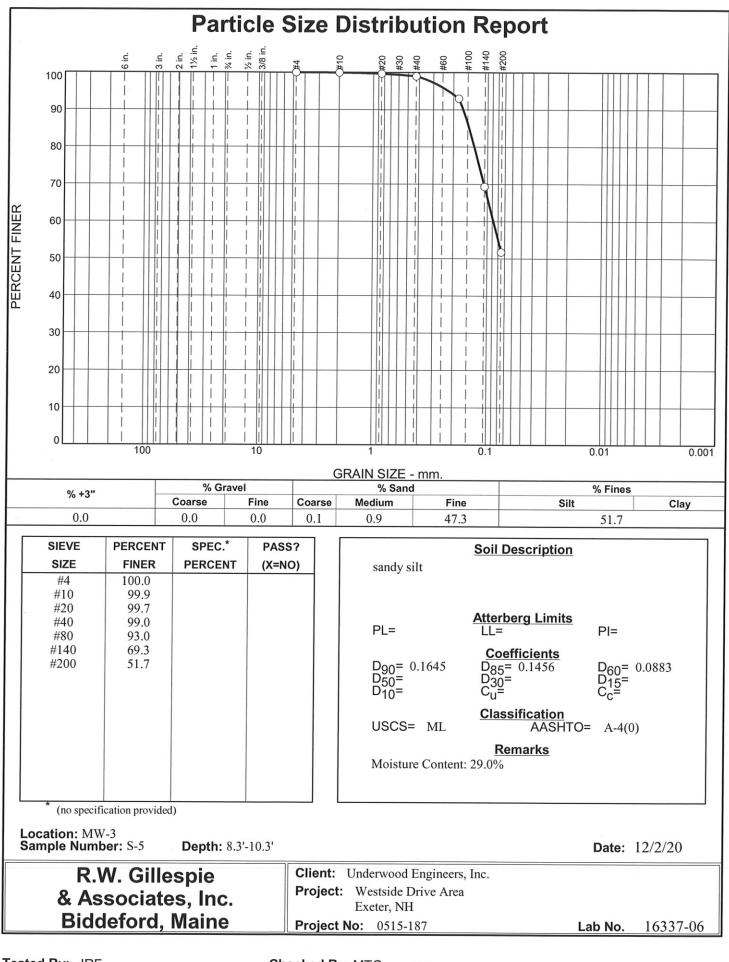

Tested By: JRF

Checked By: MTG

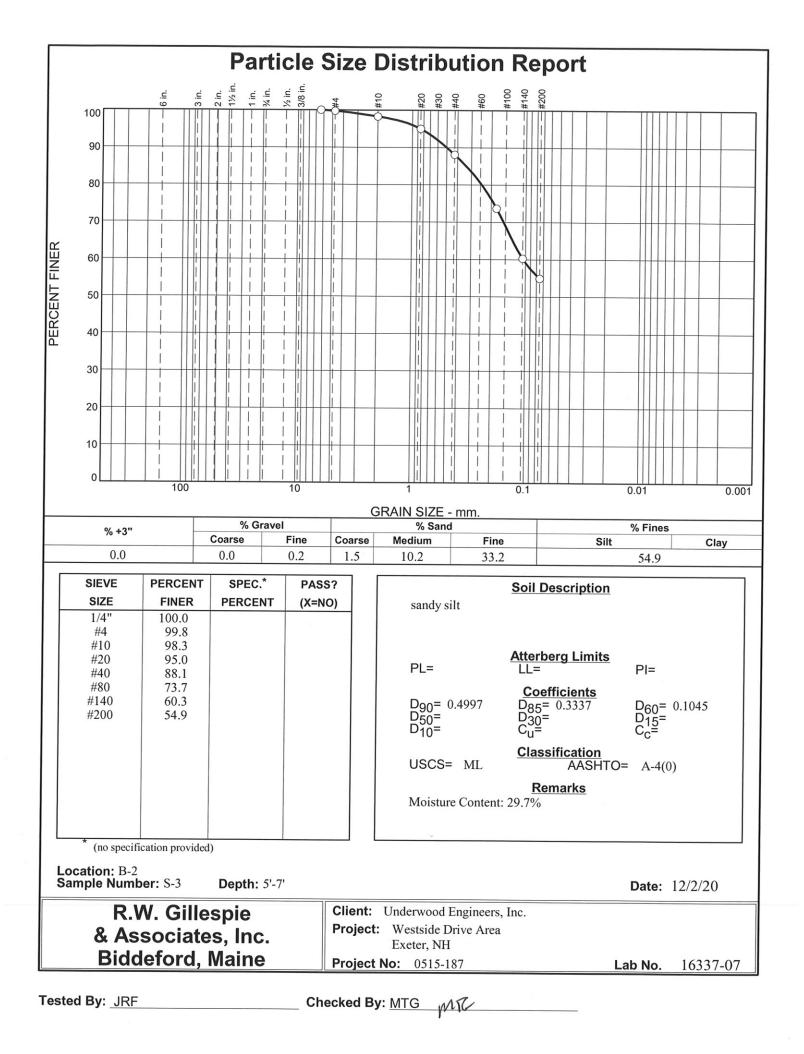

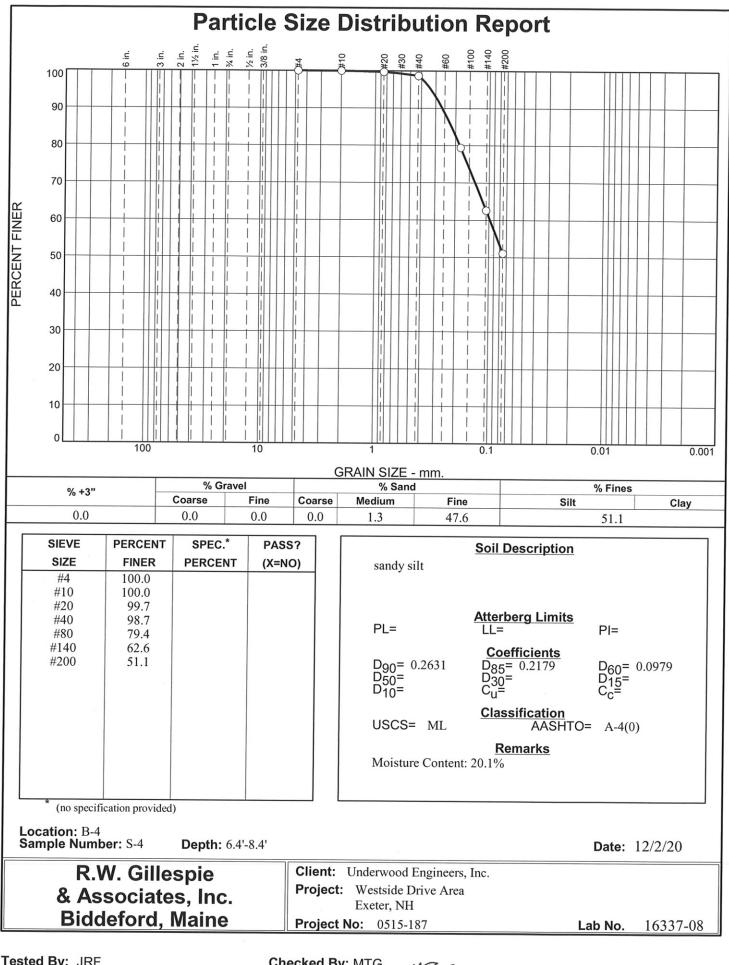

Tested	Bv:	JRF
		01.0

Checked By: MTG MTO

Appendix G Internal House Inspection Surveys


HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street #_ I Blanche LN Interv	riewer Randy Sohn
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units	House Vacant 🗆
Initial Visit: Date 10/29/25 Time: 1/39 Unsuccessful, Left Flyer Not A 2nd Visit: Date Time: Unsuccessful, Left Flyer Not A 3rd Visit: Date Time: Unsuccessful, Left Flyer Not A	dmitted 🗌 Other
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Comments	
Comments_NONC	
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Flo	oor
3. Sewer Invert Information? Cannot Locate Image: Cannot Locate Imag	Below Floor Level 🗆
4. Is there a sump Pump? Yes □ No □ If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Unknown □ Other	
5. Are the following present in the basement to collect water from the floor? (India Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Te Comments NONC	est 🗆
6. Any of the following present outside the building (Put quantity observed in space Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Comments	2
7. Water Service Information: Cannot Locate 🕒 Above Floor Level 🗆 Distance from Sil Below Floor Le	evel
	ments
General Comments: House Built on a slab, NO Basen ext KNOW where water never or sewer were Located.	; Home owner Did Not

NOTE – SEE SKETCH ATTACHED

sî ş

C:/Users/rmg/Desktop/desktop working files/Real Numbers/Exeter/2588_Westside drive/2588_Inspection.dwg, BLANK, 10/21/2020 11:28:28 AM, rmg

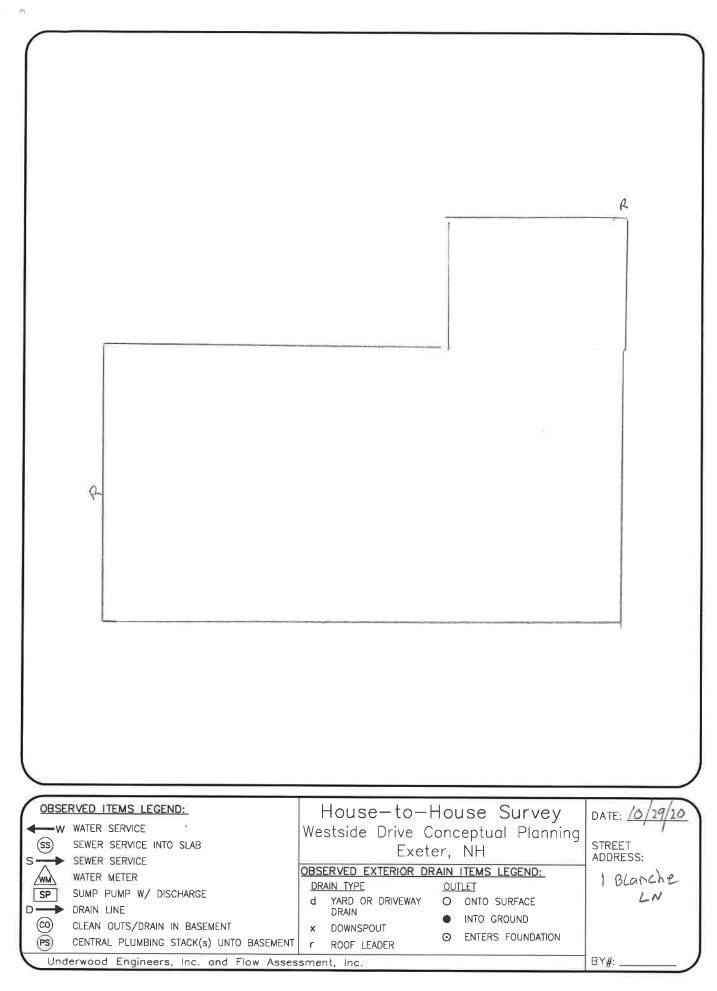


HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # Street # Scammon Ln Interviewer R	andy John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House V	acant 🗆
Initial Visit: Date 10/29/20 Time: 1015 Unsuccessful, Left Flyer Not Admitted 2nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement 🗆 Sewage in Basement 🗹 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments Sewage Back up has happened 2 Times in The past	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate 🗆 Distance from Basement Floor to Sill6 5	
Above Floor Level-Distance from Invert to Sill 🗆 Unknown Distance From Floor 🗆 Below Floor L	
Pipe Material: Cast Iron PVC PVC Clay Clay Other Copper	
Unknown Other Comments Are the following present in the basement to collect water from the floor? (Indicate if connect Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	
Comments NONE	
Any of the following present outside the building (Put quantity observed in spaced marked a cof Leader (RL) into Foundation RL into Ground RL Onto Surface RL Onto Surface RL at Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway omments MON <	
Water Service Information:	
annot Locate Above Floor Level Distance from Sil 65 th Below Floor Level	
pe Material: Copper 🗗 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments	
eneral Comments: Photo# 0204	
OTE – SEE SKETCH ATTACHED	

F.O. H. Photo # 0205

 $\mu_{\rm e} \simeq - \tau$

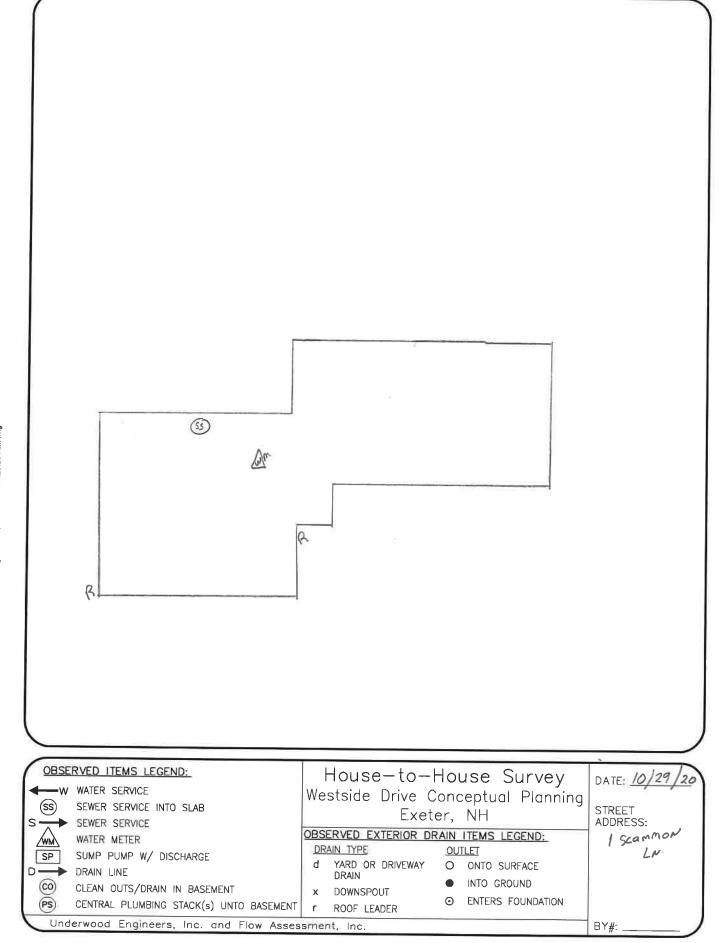


HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # <i>Lot # Tax Map #</i> Interviewer	Randy / John
	ouse Vacant 🗆
Initial Visit: Date $10/29/26$ Time:Unsuccessful,Left FlyerNot Admittee 2^{nd} Visit: DateTime:Unsuccessful,Left FlyerNot Admittee 3^{rd} Visit: DateTime:Unsuccessful,Left FlyerNot Admittee	ed 🔟 Other
1. Have the following occurred?	
Flooded Basement Clogged Pipe Not Known Other Comments Nonc	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sever Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below I Pipe Material: Cast Iron PVC Clay Other Coppet Comments Basement Was completing Full of Stuff Saw where Counter Coppet Comments And get To See where it fails of the Building Throug 4. Is there a sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sever Separate Pipe Out Surfa Unknown Other	Floor Level S was But wall of into SLaB ce Cannot Locate NO Pumps and are covered Locare. connected to Sewer) me owner states are present urked and indicate if connected to sewer 2
7 Water Samia L.C. da	
7. Water Service Information: Cannot Locate Above Floor Level Distance from Sil Below Floor Level	
Pipe Material: Copper Plastic Iron Lead Other Comments Saw Where while Located But Could NOT GETTOIT FOR	
General Comments: Basement was completly Full of Storage, No INFORMATION FOR REPORT	D ACCESS TO GLOT OF
NOTE – SEE SKETCH ATTACHED	


F.O. H. Photo # 0201

C:/Users/rmg/Desktop/desktop working files/Real Numbers/Exeter/2588_Westside drive/2588_Inspection.dwg. BLANK, 10/21/2020 11:28:28 AM, rmg

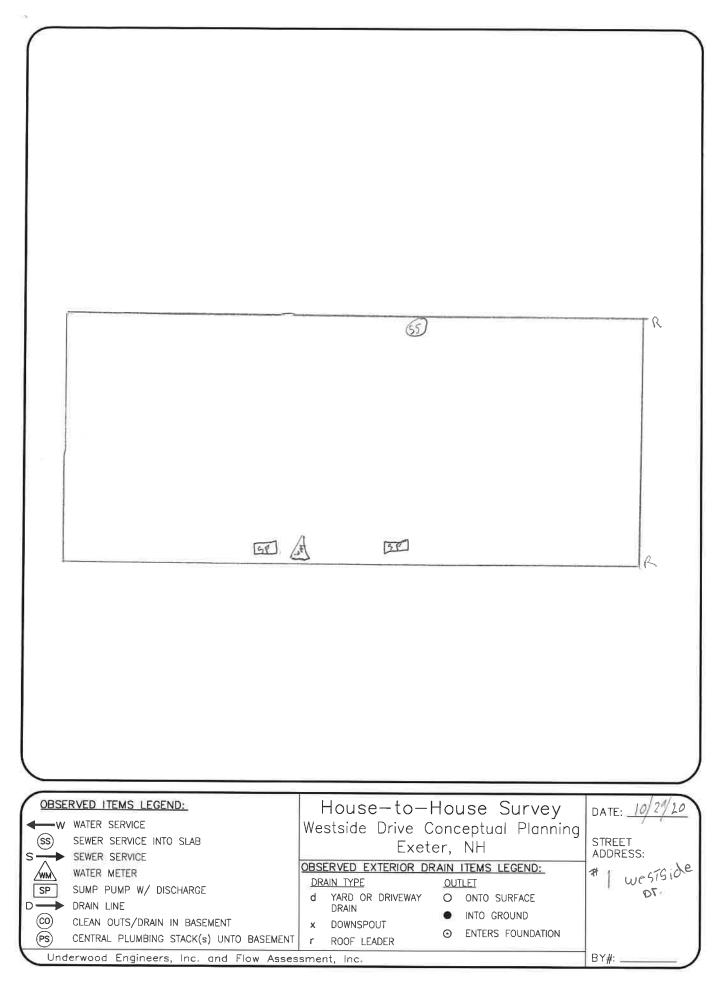

HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 2 Blanche LN. Interviewer Ra	ndy John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House Va	
Initial Visit: Date 10/29/20 Time: Unsuccessful, Left Flyer Not Admitted 0 2 nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 0 3 rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 0	Other
1. Have the following occurred?	
Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known □ Other □ Comments NONE	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill 0'10' Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor L Pipe Material: Cast Iron PVC Clay Other Copped Comments	evel
4. Is there a sump Pump? Yes ☑ No □ If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface ☑ Unknown □ Other <u>9p Photo# 0212, 0214</u> Comments	
5. Are the following present in the basement to collect water from the floor? (Indicate if connec Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments Mone	
6. Any of the following present outside the building (Put quantity observed in spaced marked a Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Driveway Comments NON C	
7. Water Service Information: Cannot Locate \Box Above Floor Level \Box Distance from Sil $\underline{6'11''}$ Below Floor Level \Box	
Pipe Material: Copper 🗹 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments	でかの213
General Comments:	
NOTE-SEE SKETCH ATTACHED F.O.H. $Photo # 0215$	

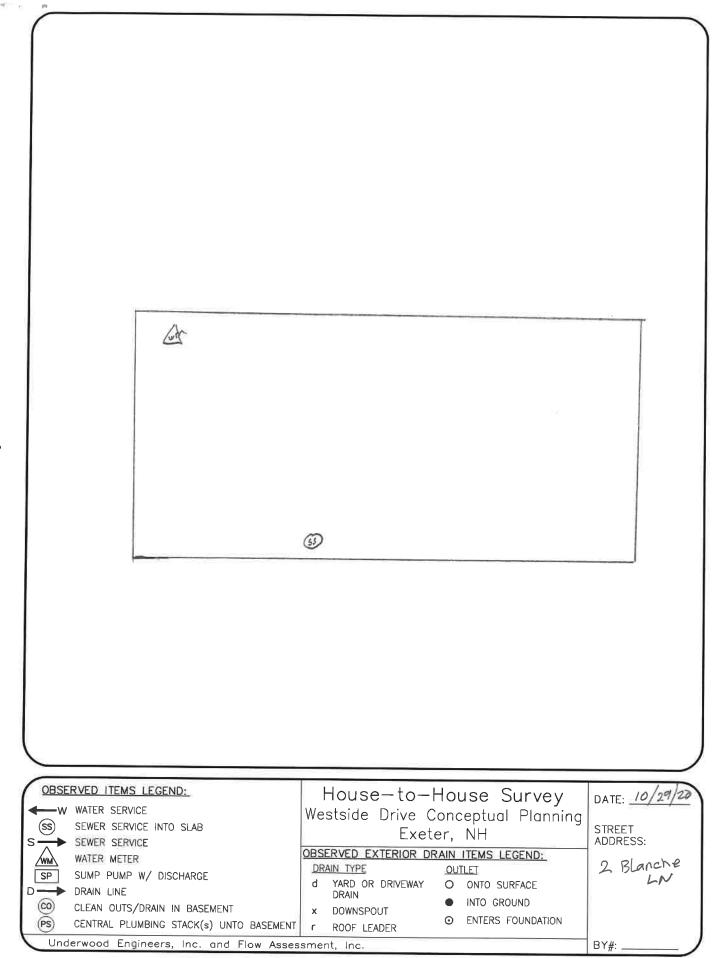


HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 2 5 Lvio Dr. Interviewer 12 Multi-Unit Res I Single Unit Res I Commercial I # of Units House V	andy (John
Initial Visit: Date /0/29/20 Time: 0927 Unsuccessful, Left Flyer Not Admitted 2nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other_ <u>ReFusal</u> Other Other
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments	
2. Is there a basement? Full Basement 🗆 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor I Pipe Material: Cast Iron PVC Clay Other	evel
Comments	
4. Is there a sump Pump? Yes □ No □	
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface 🗆	
Unknown Other	
Comments	
5. Are the following present in the basement to collect water from the floor? (Indicate if connec Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	ted to Sewer)
Comments	
6. Any of the following present outside the building (Put quantity observed in spaced marked a Roof Leader (RL) into Foundation RL into Ground RL Onto Surface	
Flat Roof Drain System 🛛 Yard Drain 🗌 Window Well Drain 🗌 Stair Well Drain 🗌 Driveway	
Comments	
7. Water Service Information:	
Cannot Locate 🗌 Above Floor Level 🗌 Distance from Sil Below Floor Level 🗌	
Pipe Material: Copper 🗆 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments	
General Comments: REFUSAL due TO Covid.	

NOTE – SEE SKETCH ATTACHED


C:\Users\rmg\Desktop\desktop working files\Real Numbers\Exeter\2586_Westside drive\2588_Inspection,dwg. BLANK, 10/21/2020 11:28:28 AM, rmg

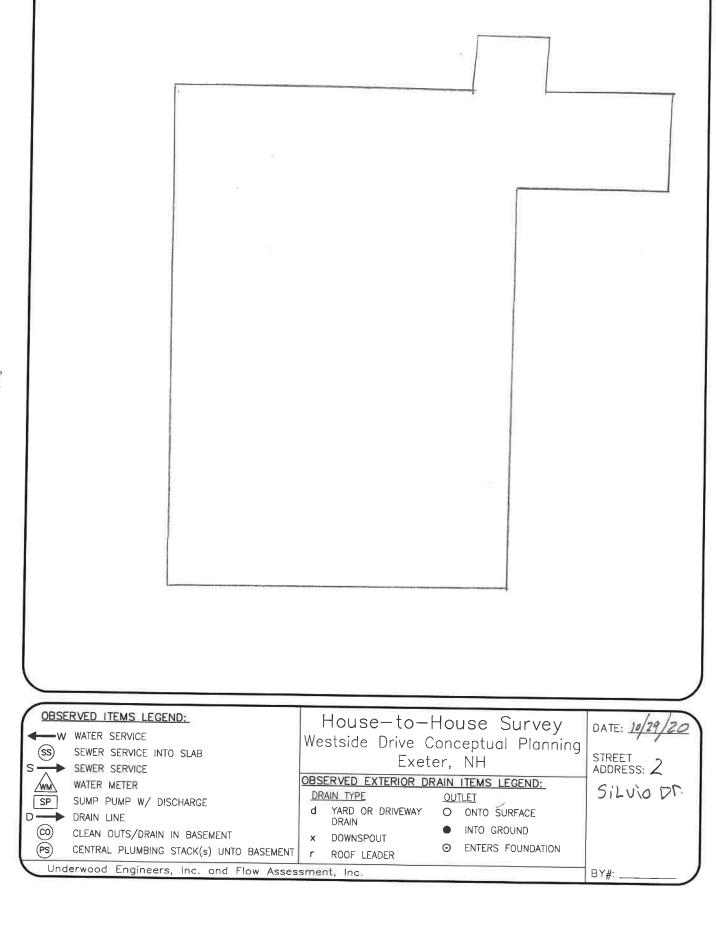

HOUSE SURVEY See Comments

•a 8

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # <u>4 BLanche LN</u> Interviewer <u>Ran</u>	1dg / John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House W	V
Initial Visit: Date 10/29/20 Time: 1124 Unsuccessful, Left Flyer Not Admitted 2 nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3 rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments	
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor Pipe Material: Cast Iron PVC Clay Other Comments	
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Unknown Other	
6. Any of the following present outside the building (Put quantity observed in spaced marked Roof Leader (RL) into Foundation RL into Ground RL Onto Surface/ Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Comments	
7. Water Service Information:	
Cannot Locate Above Floor Level Distance from Sil Below Floor Level Image: Second Seco	
General Comments: Gave Home owner a Flyer on 1st visit. She wants will contact Town To do Online inspir husband call and spoke Told him it was ok to do Outside i	To Schedule. To Dernis V. and NSP. ONLY

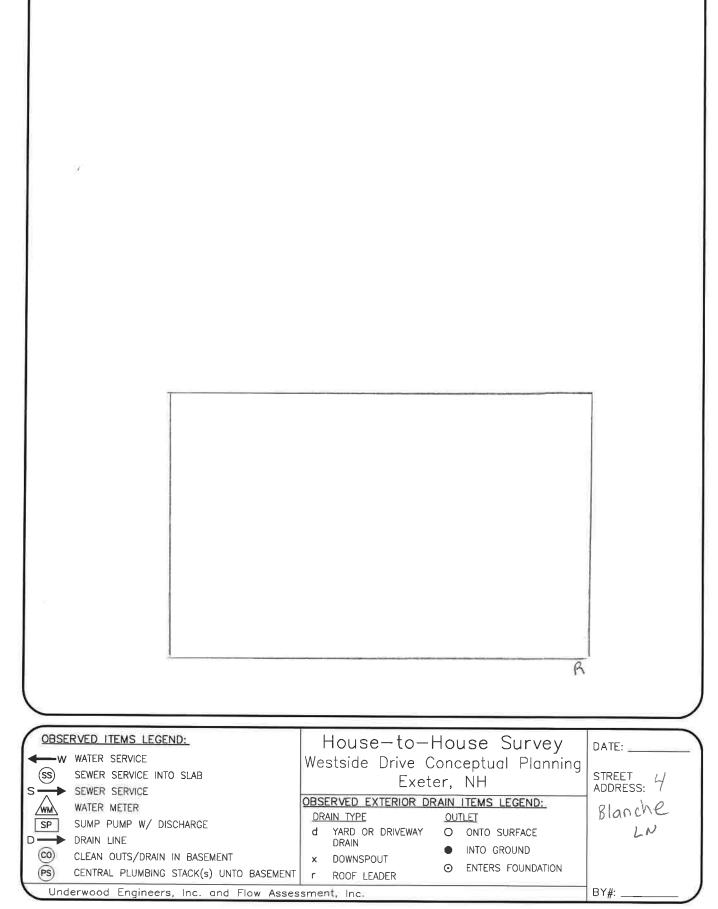


HOUSE SURVEY

NC:

т

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # Scampon LN Interviewer Ran	dy John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House V	2
Initial Visit: Date 10/29/20 Time: 1030 Unsuccessful, Left Flyer Not Admitted 2nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments NONE	
2. Is there a basement? Full Basement 🕢 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill 6'9'' Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor I Pipe Material: Cast Iron PVC Clay Other Comments	Level L
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Unknown Other	cted to Sewer)
6. Any of the following present outside the building (Put quantity observed in spaced marked Roof Leader (RL) into Foundation _ ダ RL into Ground _ ダ RL Onto Surface _ ダ Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Driveway Comments NGNC	and indicate if connected to sewe
7. Water Service Information: Cannot Locate Above Floor Level Distance from Sil <u>6</u> 10 ["] Below Floor Level Pipe Material: Copper Plastic Iron Lead Other Comments_	TO # 0206
General Comments:	
NOTE – SEE SKETCH ATTACHED	
F.O. H. photo # 0207	

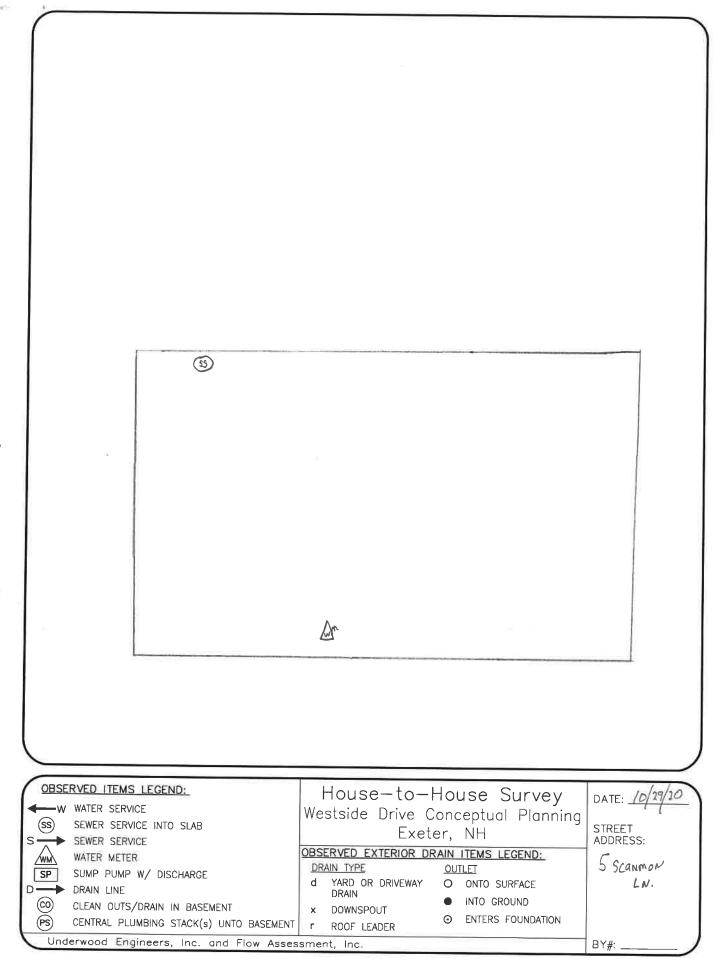


HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 5 5/Lvio DF Interviewer	Randy / John
	se Vacant 🗆
Initial Visit: Date $10/29/20$ Time: 0930 Unsuccessful,Left FlyerNot Admitted 2^{nd} Visit: DateTime:Unsuccessful,Left FlyerNot Admitted 3^{rd} Visit: DateTime:Unsuccessful,Left FlyerNot Admitted	Other
1. Have the following occurred?	
Flooded Basement I Sewage in Basement I Clogged Pipe I Not Known I Other I Comments Nove	
2. Is there a basement? Full Basement I Crawl Space Slab Floor Dirt Floor	
B. Sewer Invert Information? Cannot Locate ☐ Distance from Basement Floor to Sill _ 8'. Above Floor Level-Distance from Invert to Sill □ Unknown Distance From Floor □ Below Flo Pipe Material: Cast Iron □ PVC □ Clay □ Other _ Copper Comments	or Level 🔐
f yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Jnknown Other	
Den Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments	
Any of the following present outside the building (Put quantity observed in spaced mark toof Leader (RL) into Foundation \mathcal{P} RL into Ground \mathcal{P} RL Onto Surface \mathcal{P} lat Roof Drain System \Box Yard Drain \Box Window Well Drain \Box Stair Well Drain \Box Drive comments \mathcal{NO} RL Present	
. Water Service Information:	
annot Locate \Box Above Floor Level \Box Distance from Sil $\frac{6'}{0'}$ Below Floor Level \Box	,
eneral Comments: WUTET SERVICE PHOTO# 0202	
OTE – SEE SKETCH ATTACHED	

F.O. H. Phoio# 0203

17

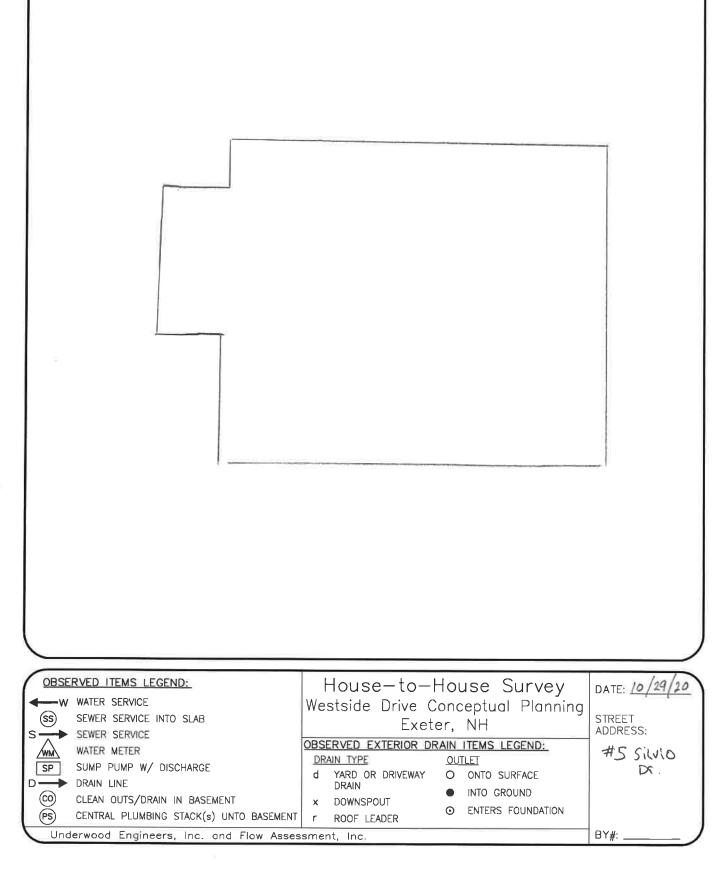


. С. н. н.

HOUSE SURVEY

н ¹⁶ан тар


Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street #_ C Scammon Lu. Interviewer	andy Isohn
	Vacant D DUTSIDE
Initial Visit: Date $10/29/20$ Time: 1114 Unsuccessful,Left FlyerNot Admitted 2^{nd} Visit: Date $11/2/20$ Time: 0925 Unsuccessful,Left FlyerNot Admitted 3^{rd} Visit: Date $11/5/20$ Time: 1600 Unsuccessful,Left FlyerNot Admitted	OtherOnly
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments	
2. Is there a basement? Full Basement □ Crawl Space □ Slab Floor □ Dirt Floor □	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor Pipe Material: Cast Iron PVC Clay Other Comments	
4. Is there a sump Pump? Yes □ No □ If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface □ Unknown □ Other	
Comments	•
6. Any of the following present outside the building (Put quantity observed in spaced marke Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Drivewa Comments	ay Drain
Cannot Locate Above Floor Level Distance from Sil Below Floor Level	
ipe Material: Copper Plastic Iron Lead Other Comments	
General Comments:	
OTE-SEE SKETCH ATTACHED F.O.H PHOTO # 0229	
CILIFI DRATA DE ADO	

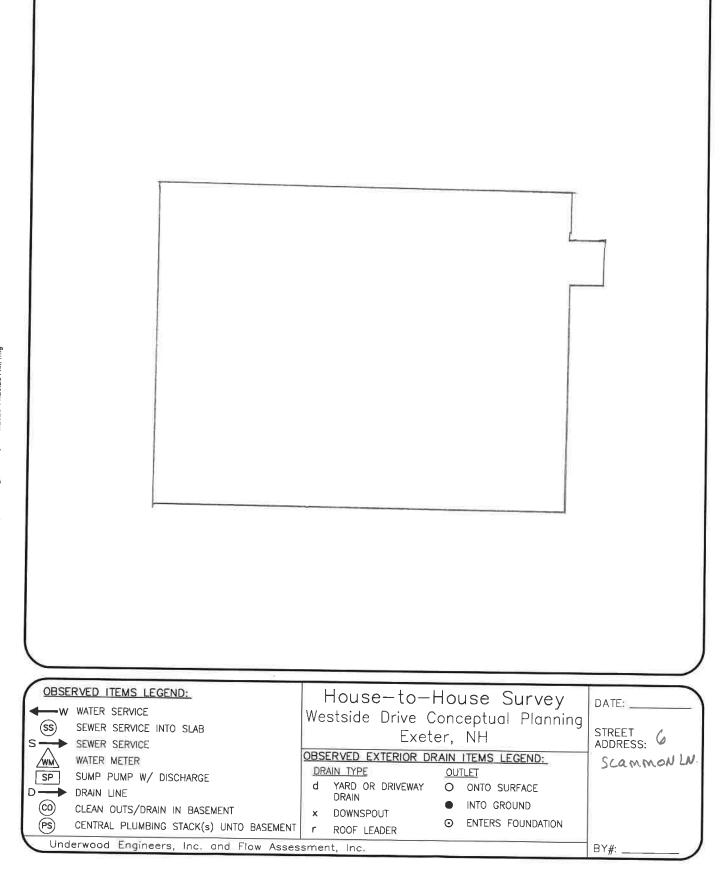

ii 13

HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 7 ScanMON LN Interviewer Ra	ndy John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House V	
Initial Visit: Date 10/29/20 Time: 10/44 Unsuccessful, Left Flyer Not Admitted 2nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement 🗹 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments home owner states 3p Takes care of water in Bo	vsement.
2. Is there a basement? Full Basement I Crawl Space Slab Floor Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor L Pipe Material: Cast Iron PVC Clay Other Comments	Level
4. Is there a sump Pump? Yes ☑ No □ If yes, where does the pump discharge? Sanitary Sewer ☑ Separate Pipe Out □ Surface □	Cannot Locate
Unknown \Box Other \underline{Sp} $\underline{Photo} \neq \underline{O208}, \underline{O209}$ Comments	
5. Are the following present in the basement to collect water from the floor? (Indicate if connect Dpen Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments	cted to Sewer)
6. Any of the following present outside the building (Put quantity observed in spaced marked Roof Leader (RL) into Foundation	
. Water Service Information:	
Cannot Locate Above Floor Level Distance from Sil 6 /1 Below Floor Level	
ipe Material: Copper 🖻 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments	TO# 0210
eneral Comments:	
IOTE – SEE SKETCH ATTACHED	
F.O. H. Photo # 0211	

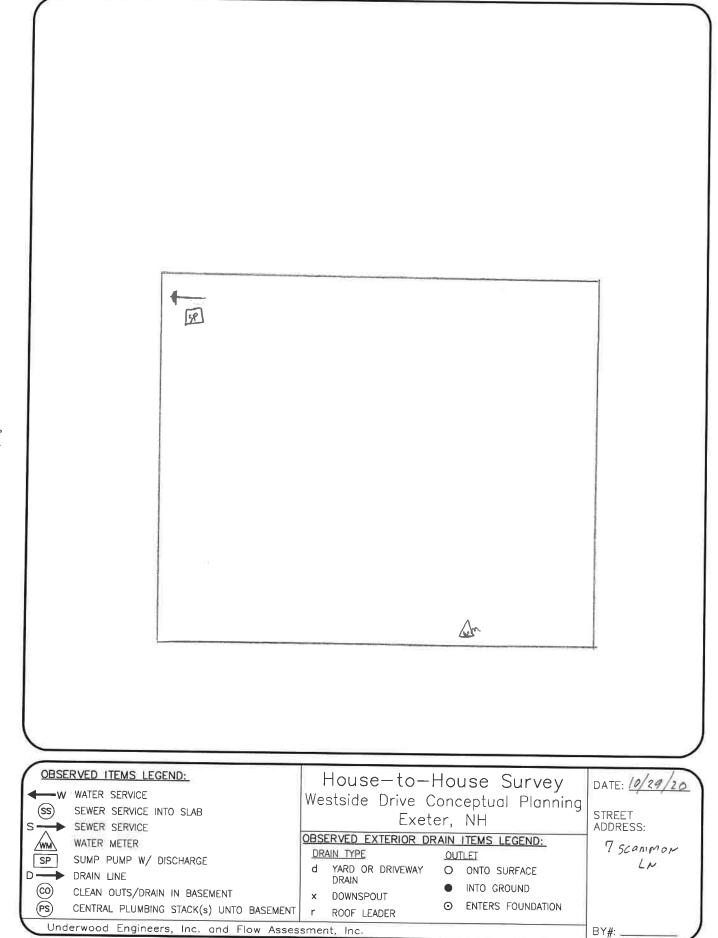

HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 8 Scammon LN Interviewer_ Ra	ndy / JOHN
Multi-Unit Res Single Unit Res Commercial # of Units House Va	
Initial Visit: Date $10/29/20$ Time: 1120 Unsuccessful,Left FlyerNot Admitted 2^{nd} Visit: Date $11/2/20$ Time: 0827 Unsuccessful,Left FlyerNot Admitted 3^{rd} Visit: DateTime: 0827 Unsuccessful,Left FlyerNot Admitted	Other ONLY
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments	
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor L Pipe Material: Cast Iron PVC Clay Other	evel 🗆
 4. Is there a sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Unknown Other	
Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments	
6. Any of the following present outside the building (Put quantity observed in spaced marked a Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain SystemYard Drain Window Well Drain Stair Well Drain Driveway CommentsNONC	
7. Water Service Information:	
Cannot Locate 🗆 Above Floor Level 🗆 Distance from Sil Below Floor Level 🗆	
Pipe Material: Copper 🗆 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments	
General Comments: Home owner call our shop and stated NO BUT will allow outside insp only	inside insp
NOTE – SEE SKETCH ATTACHED	
F.O.H. PHOTO#0228	

OBSERVED ITEMS LEGEND: W WATER SERVICE SS SEWER SERVICE INTO SLAB S SEWER SERVICE WATER METER SP SUMP PUMP W/ DISCHARGE D DRAIN LINE CO CLEAN OUTS/DRAIN IN BASEMENT CENTRAL PLUMBING STACK(s) UNTO BASEMENT Underwood Engineers, Inc. and Flow Asses	House-to-House Survey Westside Drive Conceptual Planning Exeter, NH OBSERVED EXTERIOR DRAIN ITEMS LEGEND: DRAIN TYPE d YARD OR DRIVEWAY DRAIN x DOWNSPOUT r ROOF LEADER Sment, Inc.	DATE: STREET & ADDRESS: & Scammon


HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 19 west side or Interviewer Ra	ndy John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House V	0.
Initial Visit: Date 19/29/20 Time: 1158 Unsuccessful, Left Flyer Not Admitted 2nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments Nowe	
2. Is there a basement? Full Basement 🔽 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill 7 Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor Pipe Material: Cast Iron PVC Clay Other Coppes Comments	Level 🖌
4. Is there a sump Pump? Yes INO □ If yes, where does the pump discharge? Sanitary Sewer I Separate Pipe Out □ Surface □ Unknown □ Other <u>Sp photo # 0217, 0218</u> Comments home owner stares sump pump pit is all ways pry, Even TV is Ver	Cannot Locate 🗆 10ugh Back yard
5. Are the following present in the basement to collect water from the floor? (Indicate if conne Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments	cted to Sewer)
6. Any of the following present outside the building (Put quantity observed in spaced marked Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System D Yard Drain D Window Well Drain D Stair Well Drain D Driveway Comments Both RL into Ground discharge out the Back of	∠ Drain □
7. Water Service Information: Cannot Locate \Box Above Floor Level \Box Distance from Sil $\underline{6' \mathcal{E}''}$ Below Floor Level \Box	
Pipe Material: Copper Plastic I Iron Lead Other Comments	oTO# 0220
General Comments:	
NOTE – SEE SKETCH ATTACHED	

F.O. H. photo# 0219

2...

C:/Users/rmg/Desktop/desktop working files/Real Numbers/Exeter/2588_Westside drive/2588_Inspection.dwg, BLANK, 10/21/2020 11:28:28 AM, rmg

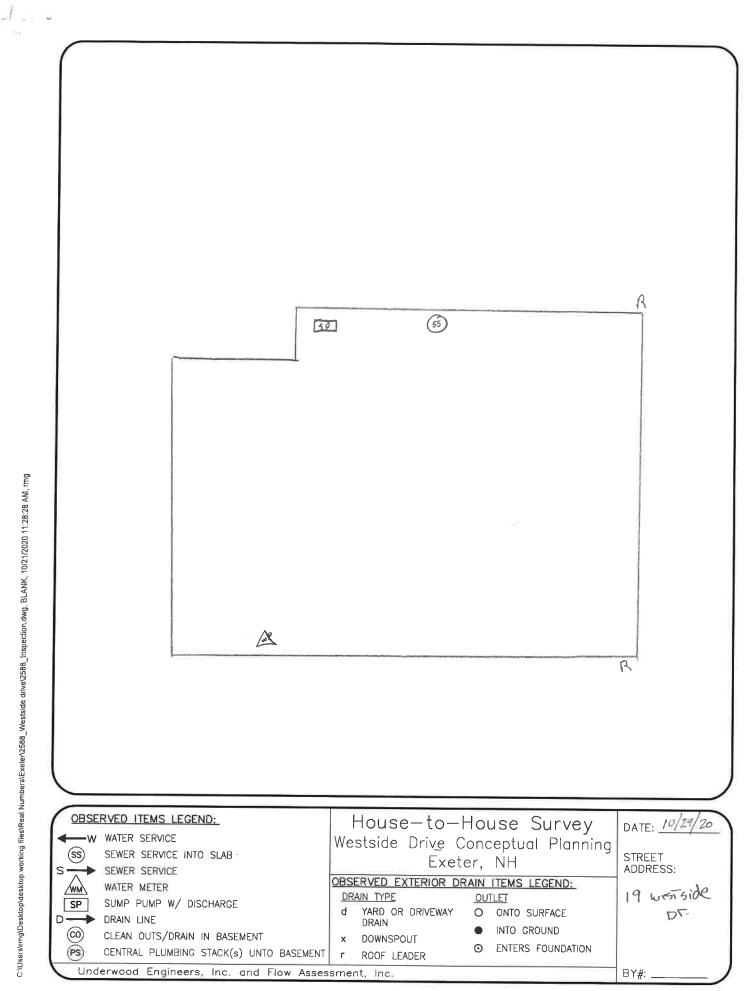

HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 43 westside Dr Interviewer Co	undy /John
_	Vacant 🗆
Initial Visit: Date 10/29/20 Time: Unsuccessful, Left Flyer Not Admitted 2 nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3 rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement Clogged Pipe Not Known Other Comments NONC	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate I Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill I Unknown Distance From Floor I Below Floor Pipe Material: Cast Iron I PVC I Clay I Other Comments	Level
4. Is there a sump Pump? Yes □ No □ If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface □ Unknown □ Other	
 5. Are the following present in the basement to collect water from the floor? (Indicate if connormal open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments None 6. Any of the following present outside the building (Put quantity observed in spaced marked Roof Leader (RL) into Foundation Quantify Pipe RL into Ground RL Onto Surface Pipe RL Onto Su	d and indicate if connected to sewer
Comments NONE	
7. Water Service Information: Cannot Locate Above Floor Level Distance from Sil Below Floor Level Pipe Material: Copper Plastic Iron Lead Other Comments	
General Comments: Basement has been converted into an apartmer	

NOTE – SEE SKETCH ATTACHED

	3	
OBSERVED ITEMS LEGEND: W WATER SERVICE SS SEWER SERVICE INTO SLAB S SEWER SERVICE WATER METER	House-to-House Survey Westside Drive Conceptual Planning Exeter, NH <u>OBSERVED EXTERIOR DRAIN ITEMS LEGEND:</u>	DATE: 10/29/20 STREET ADDRESS: 43 WEBT Side JT
SP SUMP PUMP W/ DISCHARGE D DRAIN LINE CLEAN OUTS/DRAIN IN BASEMENT (PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT	DRAIN TYPE OUTLET d YARD OR DRIVEWAY DRAIN O ONTO SURFACE * DOWNSPOUT INTO GROUND r ROOF LEADER ENTERS FOUNDATION	
Underwood Engineers, Inc. and Flow Asses	sment, Inc.	BY#: /

3

HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 45 west side Dr Interviewer Ra	rdy/John
Multi-Unit Res 🗆 Single Unit Res 🗆 Commercial 🗆 # of Units House Va	0.
Initial Visit: Date $10/29/20$ Time: 1240 Unsuccessful,Left FlyerNot Admitted 2^{nd} Visit: Date $11/2/20$ Time: 0640 Unsuccessful,Left FlyerNot Admitted 0000 3^{rd} Visit: Date $11/5/20$ Time: 1539 Unsuccessful,Left FlyerNot Admitted 00000 150000 Time: 1539 Unsuccessful,Left FlyerNot Admitted 000000	Other
1. Have the following occurred?	
Flooded Basement Clogged Pipe Not Known Other Comments	
2. Is there a basement? Full Basement 🗆 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor Lo Pipe Material: Cast Iron PVC Clay Other Comments Distance Comments	evel 🗆
4. Is there a sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Jnknown Other	
5. Are the following present in the basement to collect water from the floor? (Indicate if connect Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments	ed to Sewer)
5. Any of the following present outside the building (Put quantity observed in spaced marked a coof Leader (RL) into Foundation RL into Ground RL Onto Surface lat Roof Drain System	
. Water Service Information:	
annot Locate 🗌 Above Floor Level 🗆 Distance from Sil Below Floor Level 🗆	
ipe Material: Copper 🗆 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments	
eneral Comments: home owner Took FLYET and STATES She will Make Large Dogs very agressive Not comportable with	an appintment. out side insp

NOTE – SEE SKETCH ATTACHED

E 8 (8)

OBSERVED ITEMS LEGEND: W WATER SERVICE SS SEWER SERVICE INTO SLAB S SEWER SERVICE WATER METER SP SUMP PUMP W/ DISCHARGE D DRAIN LINE CO CLEAN OUTS/DRAIN IN BASEMENT (PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT Underwood Engineers, Inc. and Flow Assess	House-to-House Survey Westside Drive Conceptual Planning Exeter, NH OBSERVED EXTERIOR DRAIN ITEMS LEGEND: DRAIN TYPE OUTLET d YARD OR DRIVEWAY O ONTO SURFACE DRAIN O ONTO SURFACE DRAIN O ONTO SURFACE ORAIN O ONTO SURFACE DRAIN O ONTO SURFACE Sment, Inc.	DATE: STREET ADDRESS: 45 Jestiside Dr. BY#:

ŕt.

HOUSE SURVEY

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Servi Bedford, NH	ices
Lot #_ Tax Map # Sub System Street # 51 west side pr= Interviewer Re	andy JOHN	
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House		Complète
Initial Visit: Date 10/29/20 Time: 124/3 Unsuccessful, Left Flyer Not Admitted 2nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted Insuccessful, Left Flyer 3rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted Insuccessful, Left Flyer	Other See Comme 5 Other Other	
1. Have the following occurred?		
Flooded Basement D Sewage in Basement D Clogged Pipe D Not Known D Other D Comments NONC acording to Home owner		
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor		
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below Floor Pipe Material: Cast Iron PVC Clay Other Comments		
4. Is there a sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Unknown Other		
 5. Are the following present in the basement to collect water from the floor? (Indicate if conner Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments	ected to Sewer)	
Roof Leader (RL) into Foundation \mathcal{Q} RL into Ground \mathcal{Q} RL Onto Surface \mathcal{Q} Flat Roof Drain System \Box Yard Drain \Box Window Well Drain \Box Stair Well Drain \Box Drivewa		a to sewer)
7. Water Service Information:		
Cannot Locate Above Floor Level Distance from Sil Below Floor Level Pipe Material: Copper Plastic Iron Lead Other Comments		
Seneral Comments: Home owner states he will be doing the online he did allow us to do outside insp.	Form from The To	wv.

NOTE – SEE SKETCH ATTACHED

NUMBER OF

B BSERVED ITEMS LEGEND: Image: Stand Sta			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td>(</td> <td></td> <td></td>	(
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td></td> <td></td>			
COESERVED_LITEMS_LEGEND: W WATER SERVICE Some Service <td></td> <td>B</td> <td></td>		B	
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION		IJ,	
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			1
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION	1		
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			l
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION	L		
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION	1		
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION		F	
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION		1	
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE OWNSPOUT INTO GROUND CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND FS CENTRAL PLUMBING STACK(s) UNTO BASEMENT X DOWNSPOUT Enters FOUNDATION			
Image: Sewer service Water service Westside Drive Conceptual Planning Street Some sewer service Exeter, NH Street Street Mater meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: Date: 19/24/20 SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET Mater meter OBSERVED CONTO SURFACE Drain type Outlet Main Line DRAIN LINE Into Ground Into Ground Main Clean Outs/Drain in Basement X DOWNSPOUT Into Ground Into Ground Mater Metrer Yard or Leader Into Ground Into Ground			
Image: Water Service Westside Drive Conceptual Planning STREET Some Sewer Service Exeter, NH Street Image: Water Meter Besever Service Besever Dexterior Drain Items Legend: Street Image: Sewer Service Water Meter Besever Dexterior Drain Items Legend: Street Image: Sewer Service Mater Meter Deserved Exterior Drain Items Legend: Street Image: Sewer Service Deserved Exterior Drain Items Legend: Dutlet Outlet Image: Sewer Service Drain Line Drain Sewert O onto Surface Deserved Exters Foundation Image: Sewer Service Image: Sewert Service Image: Sewert Service Street Sewert Sew	OBSERVED ITEMS LEGEND:	House-to-House Survey	DATE IN/20/20
Solution Server Service INTO SLAB Exeter, NH STREET ADDRESS: 5/ Solution Server Service OBSERVED EXTERIOR DRAIN ITEMS LEGEND: DUTLET Matter Meter OBSERVED EXTERIOR DRAIN ITEMS LEGEND: DUTLET SP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET D DRAIN LINE OWNSPOUT ONTO SURFACE Destrict Stress Foundation (CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUND Enters Foundation		Westside Drive Conceptual Planning	DATE: MAN LU
WMA WATER METER OBSERVED EXTERIOR DRAIN ITEMS LEGEND: DESERVED EXTERIOR DRAIN DESERVED EXTERIOR DRAIN ITEMS LEGEND: DESERVED EXTERNOL CO CLEAN OUTS/DRAIN IN BASEMENT X DOWNSPOUT INTO GROUNDATION INTO GROUNDATION CO CENTRAL PLUMBING STACK(s) UNTO BASEMENT Y ROOF LEADER ENTERS FOUNDATION			STREET
SUMP SUMP PUMP W/ DISCHARGE DRAIN TYPE OUTLET D → DRAIN LINE d YARD OR DRIVEWAY O ONTO SURFACE CO CLEAN OUTS/DRAIN IN BASEMENT × DOWNSPOUT • INTO GROUND (PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT r ROOF LEADER • ENTERS FOUNDATION			1 1
SP SUMP FOMP W/ DISCHARGE d YARD OR DRIVEWAY O ONTO SURFACE D→ DRAIN LINE DRAIN DRAIN INTO GROUND C0 CLEAN OUTS/DRAIN IN BASEMENT × DOWNSPOUT ● INTO GROUND (PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT r ROOF LEADER ● ENTERS FOUNDATION	- <u>-</u>		vestside st.
CO CLEAN OUTS/DRAIN IN BASEMENT × DOWNSPOUT • INTO GROUND PS CENTRAL PLUMBING STACK(s) UNTO BASEMENT r ROOF LEADER • ENTERS FOUNDATION		d YARD OR DRIVEWAY O ONTO SURFACE	
	(PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT		
			BY#:)

÷ŕ

1 1

20120


Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 55 west Side DT Interviewer	andy John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House	Vacant 🗆
Initial Visit: Date 10/29/20 Time: 12.57 Unsuccessful, Left Flyer Not Admitted 2 nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted 3 rd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted	Other
1. Have the following occurred?	
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗅 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Delow Floor Pipe Material: Cast Iron D PVC D Clay D Other Comments PAFTIALLY FINAISMENT CML SEWET EXIT	
4. Is there a sump Pump? Yes 🔽 No 🗆	ſ
If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface 🖻	Cannot Locate
Unknown \Box Other Comments Sp Photo # 0223, 0224	
$\mathcal{L}_{\mathcal{L}}$	
5. Are the following present in the basement to collect water from the floor? (Indicate if conn Open Clean Out Basement Drain D Open Pipe D Sump Pit D Recommend Dye Test D Comments <u>Clean out was Capped</u> .	
6. Any of the following present outside the building (Put quantity observed in spaced marked Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Drivewa Comments NONC	
Cannot Locate Above Floor Level Distance from Sil Below Floor Level	
Pipe Material: Copper Plastic I Iron Lead Other Comments_	oto # 0223
General Comments:	
NOTE – SEE SKETCH ATTACHED	
F. O. H. photo # 0225	

B E H H R F DATE: 10/29/20 OBSERVED ITEMS LEGEND: House-to-House Survey w WATER SERVICE Westside Drive Conceptual Planning SEWER SERVICE INTO SLAB STREET 55 (ss) Exeter, NH SEWER SERVICE S westside Dr. OBSERVED EXTERIOR DRAIN ITEMS LEGEND: WATER METER /wm\ DRAIN TYPE OUTLET SP SUMP PUMP W/ DISCHARGE YARD OR DRIVEWAY d 0 ONTO SURFACE DRAIN LINE D-DRAIN INTO GROUND 0 (00) CLEAN OUTS/DRAIN IN BASEMENT DOWNSPOUT х \odot ENTERS FOUNDATION (PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT ROOF LEADER r Underwood Engineers, Inc. and Flow Assessment, Inc. BY#: .

20120

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 63 west side Dr. Inter	viewer Randy / John
Multi-Unit Res 🗋 Single Unit Res 🗆 Commercial 🗐 # of Units	House Vacant 🗆
Initial Visit: Date $10/29/20$ Time: $13/2$ Unsuccessful,Left FlyerNot 2^{nd} Visit: Date $11/2/20$ Time: 0538 Unsuccessful,Left FlyerNot 3^{rd} Visit: Date $11/5/20$ Time: 1550 Unsuccessful,Left FlyerNot	Admitted 🗌 Other
1. Have the following occurred?	
Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known □ Comments	
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt F	loor
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sil Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Distance From Floor Pipe Material: Cast Iron PVC Clay Other Comments	Below Floor Level 🗆
4. Is there a sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Unknown Other	
5. Are the following present in the basement to collect water from the floor? (Indi Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye T Comments	est 🗆
6. Any of the following present outside the building (Put quantity observed in space Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System	e Driveway Drain
7. Water Service Information:	
Cannot Locate 🗆 Above Floor Level 🗆 Distance from Sil Below Floor L	evel 🗆
Pipe Material: Copper 🗆 Plastic 🗆 Iron 🗆 Lead 🗆 Other Com	iments
General Comments:	

NOTE – SEE SKETCH ATTACHED

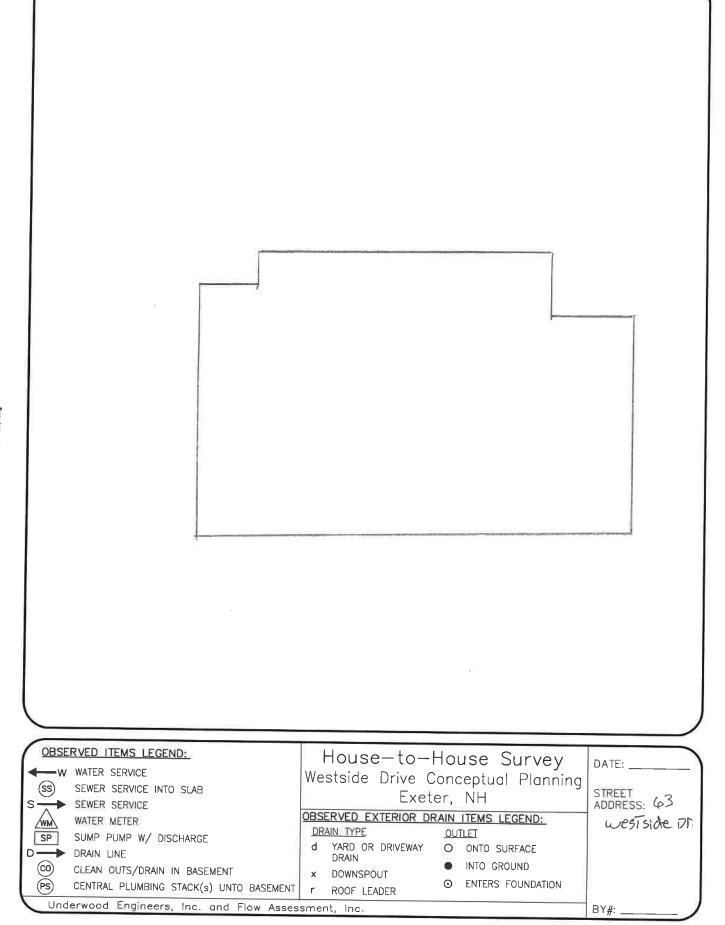

20120

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 65 westside DF Interviewer	Randy / John
	ouse Vacant 🗆
Initial Visit: Date $10/29/20$ Time: $13/5$ Unsuccessful,Left FlyerNot Admittee 2^{nd} Visit: Date $11/2/20$ Time: 0635 Unsuccessful,Left FlyerNot Admittee 3^{rd} Visit: Date $11/5/20$ Time: 1551 Unsuccessful,Left FlyerNot Admittee	d 🗌 Other
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments	
2. Is there a basement? Full Basement □ Crawl Space □ Slab Floor □ Dirt Floor □	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Below F Pipe Material: Cast Iron PVC Clay Other Comments	Floor Level 🗆
4. Is there a sump Pump? Yes □ No □ If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface Unknown □ Other	
 5. Are the following present in the basement to collect water from the floor? (Indicate if of Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments 6. Any of the following present outside the building (Put quantity observed in spaced ma Roof Leader (RL) into Foundation RL into Ground RL Onto Surface Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driver Driver	urked and indicate if connected to sewer
Comments	
7. Water Service Information: Cannot Locate Above Floor Level Distance from Sil Below Floor Level Pipe Material: Copper Plastic Iron Lead Other Comments_]
General Comments: Home owner store he is Not ha	ving ingp. Done.

NOTE – SEE SKETCH ATTACHED

(eg) - 21

OBSERVED ITEMS LEGEND: W WATER SERVICE SS SEWER SERVICE INTO SLAB S SEWER SERVICE WATER METER SP SUMP PUMP W/ DISCHARGE D DRAIN LINE CLEAN OUTS/DRAIN IN BASEMENT (C) CLEAN OUTS/DRAIN IN BASEMENT (C) CLEAN OUTS/DRAIN IN BASEMENT Underwood Engineers, Inc. and Flow Assess	House-to-House Survey Westside Drive Conceptual Planning Exeter, NH OBSERVED EXTERIOR DRAIN ITEMS LEGEND: DRAIN TYPE OUTLET d YARD OR DRIVEWAY O ONTO SURFACE DRAIN INTO GROUND × DOWNSPOUT r ROOF LEADER Sment, Inc.	DATE: STREET ADDRESS: 65 Westside DT. BY#:

20120

Sec. - 10

Exeter, NH	Flow Assessment Services Bedford, NH
Lot #_ Tax Map # Sub System Street # 67 West Side DF Interview	er Randy / John
	House Vacant
Initial Visit: Date 10/29/20 Time: 1320 Unsuccessful, Left Flyer I Not Admi 2nd Visit: Date 11/2/20 Time: 0830 Unsuccessful, Left Flyer II Not Admi 3rd Visit: Date 11/5/20 Time: 1555 Unsuccessful, Left Flyer II Not Admi	itted Other OUTSIDE
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Othe	er 🗆
Comments	
2. Is there a basement? Full Basement 🗆 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor	
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to Sill	
Above Floor Level-Distance from Invert to Sill 🗆 Unknown Distance From Floor 🗆 Below	w Floor Level 🗆
Pipe Material: Cast Iron PVC Clay Other Comments	
Unknown Other	
Unknown Other Comments S. Are the following present in the basement to collect water from the floor? (Indicate Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	if connected to Sewer)
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Sur Unknown Other	if connected to Sewer)
Unknown Other Comments Other Other Other Other Other Other following present in the basement to collect water from the floor? (Indicate Depen Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments Other following present outside the building (Put quantity observed in spaced recommender (RL) into Foundation RL into Ground RL Onto Surface Tat Roof Drain System Yard Drain Window Well Drain Stair Well Drain	if connected to Sewer) marked and indicate if connected to sewer
Unknown Other	if connected to Sewer) marked and indicate if connected to sewer
Unknown Other	if connected to Sewer) marked and indicate if connected to sewer Driveway Drain Locked Fence.
Unknown Other Comments Comments S. Are the following present in the basement to collect water from the floor? (Indicate Depen Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments Comments S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed in spaced recomments) S. Any of the following present outside the building (Put quantity observed recomments) S. Any of the following present outside the building (Put quantity observed recomments) S. Any of the following present outside the building (Put quantity obse	if connected to Sewer) marked and indicate if connected to sewer Driveway Drain Locked Fence.
Unknown Other	if connected to Sewer) marked and indicate if connected to sewer marked and indicate if connected to sewer Locked Fence. ts

House-to-House Survey OBSERVED ITEMS LEGEND: DATE: _ W WATER SERVICE Westside Drive Conceptual Planning SEWER SERVICE INTO SLAB (SS) STREET ADDRESS: Exeter, NH SEWER SERVICE s--OBSERVED EXTERIOR DRAIN ITEMS LEGEND: 67 WISTSIDE DT WATER METER DRAIN TYPE OUTLET SP SUMP PUMP W/ DISCHARGE YARD OR DRIVEWAY d Ο ONTO SURFACE D-DRAIN LINE ┢ DRAIN INTO GROUND (co) CLEAN OUTS/DRAIN IN BASEMENT х DOWNSPOUT (PS) Θ ENTERS FOUNDATION CENTRAL PLUMBING STACK(s) UNTO BASEMENT r ROOF LEADER Underwood Engineers, Inc. and Flow Assessment, Inc. BY#: _

**

. K

HOUSE SURVEY

1


-

Westside Drive Area Conceptual Plan Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 230 Front ST Inte	erviewer Randy / John
Multi-Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units	House Vacant 🗆
Initial Visit: Date /0/29/20 Time: 08/10 Unsuccessful, Left Flyer Not 2nd Visit: Date Time: Unsuccessful, Left Flyer Not 3rd Visit: Date Time: Unsuccessful, Left Flyer Not	Admitted Other
1. Have the following occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known	Other
Comments Hone owner states they have only hived here for 7	Morth. Could Not Give any MC
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt	Floor
3. Sewer Invert Information? Cannot Locate Distance from Basement Floor to S Above Floor Level-Distance from Invert to Sill Unknown Distance From Floor Pipe Material: Cast Iron PVC Clay Other	Below Floor Level
Comments	Surface 🕼 Cannot Locate 🗆
Comments 4. Is there a sump Pump? Yes I No I	Surface Cannot Locate
Comments 4. Is there a sump Pump? Yes INO I If yes, where does the pump discharge? Sanitary Sewer I Separate Pipe Out II Unknown I Other Photo # Fot Sp 0195, Sp discharge photo # Comments	Surface Cannot Locate
Comments	Surface Cannot Locate
Comments	Surface Cannot Locate
Comments	Surface Cannot Locate
Comments	Surface \square Cannot Locate \square $\square 198$ licate if connected to Sewer) Test \square ced marked and indicate if connected to seven $e _ 5$ \square Driveway Drain \square Level \square uments \square after metor photo $\# 0.196$

Q 0 (5) House Garage A R R OBSERVED ITEMS LEGEND: House-to-House Survey DATE: 10/29 W WATER SERVICE Westside Drive Conceptual Planning (SS) SEWER SERVICE INTO SLAB ADDRESS: 230 Exeter, NH S SEWER SERVICE OBSERVED EXTERIOR DRAIN ITEMS LEGEND: /wm WATER METER Front ST DRAIN TYPE OUTLET SUMP PUMP W/ DISCHARGE SP YARD OR DRIVEWAY d Ο ONTO SURFACE DRAIN LINE D DRAIN • INTO GROUND (co)CLEAN OUTS/DRAIN IN BASEMENT DOWNSPOUT х ENTERS FOUNDATION \odot (PS) CENTRAL PLUMBING STACK(s) UNTO BASEMENT r ROOF LEADER Underwood Engineers, Inc. and Flow Assessment, Inc. BY#:

	HC	DUSE SURVEY	
I/I Engineering Services Fxeter, NH	TRY BACK (a 6:30	Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # _ f BL	ANCHE LN Interviewer RM / RST
Multi Unit Res 🗆 Single Unit Res 🌶	Commercial □ # of Units	House Vacar	at 🗆
Initial Visit: Date $\frac{10-8-09}{2^{nd} \text{ Visit: Date }}$ 3rd Visit: Date $\frac{10-8-09}{10-12-09}$	Time: $\frac{2205}{1550}$ Time: $\frac{15550}{1039}$	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
 Have any of the following problems of Flooded Basement Sewage in Ba Comments:	sement 🗆 Clogged Pipe 🗆		
2. Is there a basement? Full Basement	Crawl Space Slab I	Floor 🗆 Dirt Floor 🗆 C	omments:
Comments:	nvert to Sill	Unknown Distance	
Lis there a Sump Pump? Yes D No If yes, where does the pump discharg Unknown D Other Comments:	e? Sanitary Sewer 🗆 Sepa		
 Are the following present in the base Open Clean Out □ Basement Drain Comments: 	a □ Open Pipe □ Sump	Pit 🗆 Recommend Dye	
	RL Into G	round <u></u> R	
			Below Floor Level Comments:
ĸ			
NOTE – SEE SKETCH ON BACK			

.

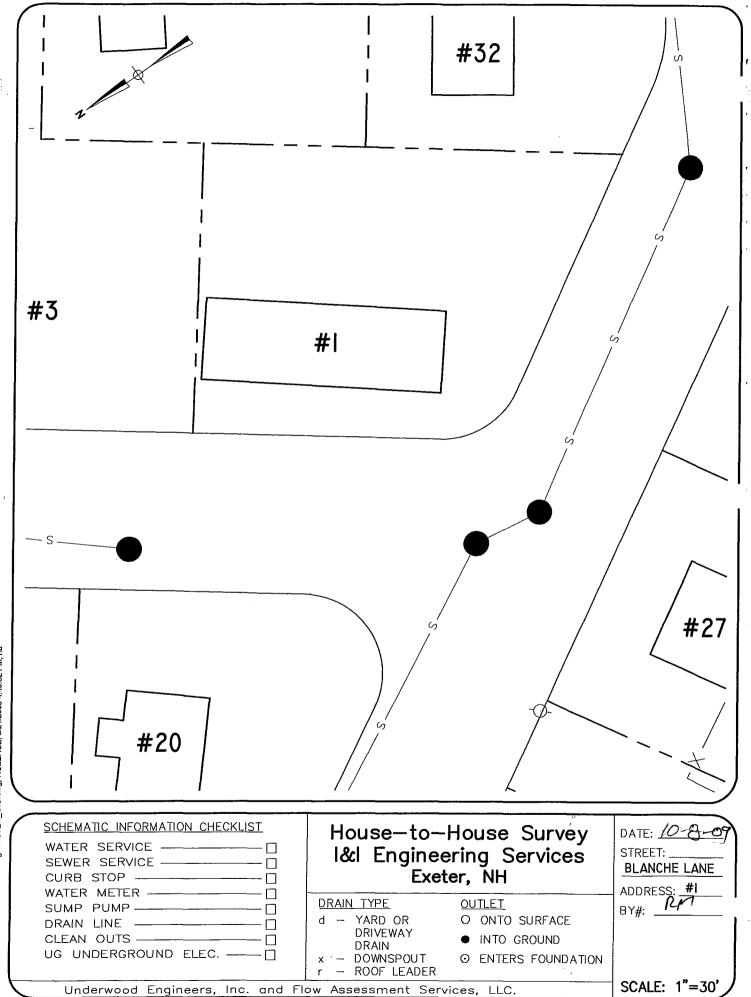


H:\SDSKPROJ\15-....1542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:49:52 PM, rla

// Engineering Services eter, NH

Flow Assessment Services Bedford, NH

.ot #	Tax Map #	Sub System	Street #_2	BLANCHE LN Interviewer RM	IRST-
		Commercial □ # of Unit			/***
and Visit: Date and Visit: Date	10-12-09	Fime: 16-52	Unsuccessful, Left Fly Unsuccessful, Left Fly Unsuccessful		
Flooded Basement		ent 🗆 Clogged Pipe 🗆		□	
<u></u>			·	Comments:	
		te D Distance From B			
Pipe Material: Ca		Clay Other		ance From Floor D Below Floor L	
Unknown 🗆 Othe	the pump discharge? S			ce 🗆 Cannot Locate 🗆	
Open Clean Out □	Basement Drain 🗆	to collect water from the Open Pipe □ Sump	Pit 🗆 Recommend		
Roof Leader (RL) I Flat Roof Drain Sys	nto Foundation stem 🛛 Yard Drain (O RL Into C Window Well Drain	bround n D Stair Well Drain [and indicate if connected to sewer) RL Onto Surface Driveway Drain □	
Water Service Inform Cannot Locate 🗆	nation: Above Floor Level [Distance from Sill		·····	<u> </u>
eral Comments:					

NOTE - SEE SKETCH ON BACK

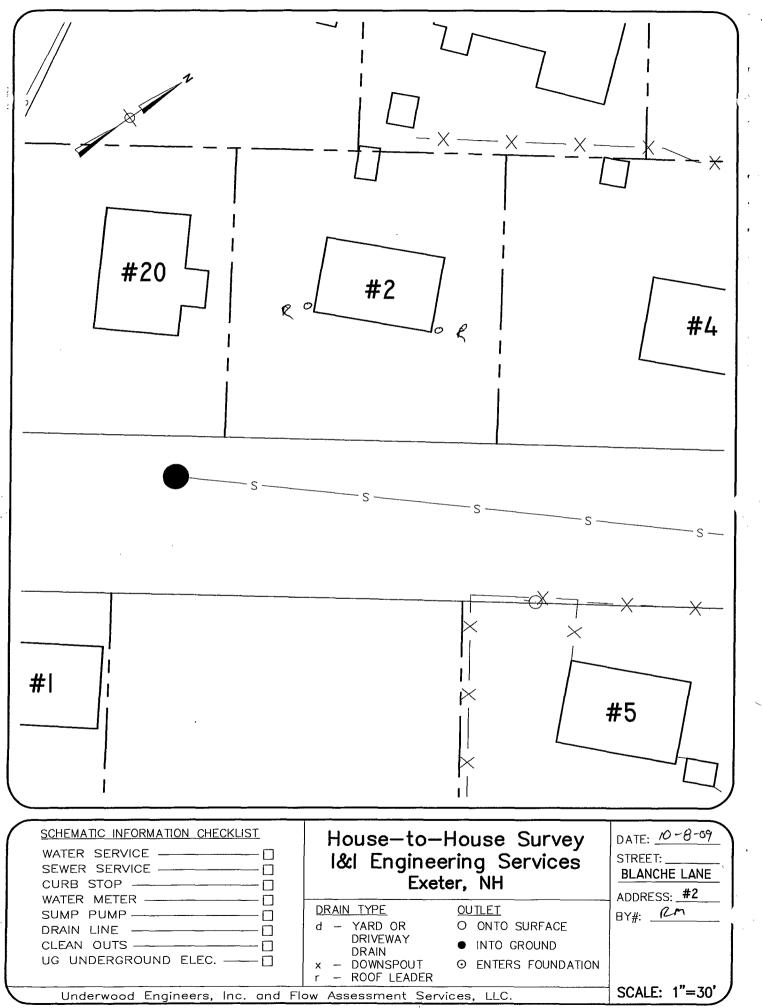


H:\SDSKPROJ\; 52LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 521/2009 2:28:43 PM, rla

.

I/I Engineering Services Fxeter, NH			Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # 3 BLAN	EHE LON Interviewer RM/RST
Multi Unit Res 🗆 Single Unit Res	_		
Initial Visit: Date $10-8-09$ 2^{nd} Visit: Date $10-12-3$ 3rd Visit: Date		Unsuccessful, Left Flyer D Unsuccessful, Left Flyer D Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following problem	s occurred?		
Flooded Basement 🗇 Sewage in 1	Basement 🛛 Clogged Pipe 🗆	Not Known 🛛 Other 🗆	
			mments:
3. Sewer Invert Information? Canno	t Locate 🖌 Distance From B	Basement Floor to Sill	
Above Floor Level – Distance From	Invert to Sill □	Unknown Distance]	From Floor D Below Floor Level D
Pipe Material: Cast Iron D PV	/C 🗆 Clay 🗆 Other		
Comments: <u>Sewel Clean</u>	out is located	L OUT Front OF BL	d
s there a Sump Pump? Yes □ 1	No the		
If yes, where does the pump dischar		arate Pipe Out 🗍 Surface 🗍	Cannot Locate
Unknown 🗆 Other			
Are the following present in the bas Open Clean Out Basement Dra			
Comments:			
			1
Any of the following present outside Roof Leader (RL) Into Foundation	_ /	-	
	,		
Flat Roof Drain System D Yard I			Driveway Drain 🗇
Comments:	······································		
Water Service Information: Cannot Locate D Above Floor L	evel 🗆 Distance from Sill		Below Floor Level
Pipe Material: Copper 🕑 Plasti	ic 🗋 Iron 🗍 Lead 🗍	Other	_ Comments:
eral Comments:			
	· · · · · · · · · · · · · · · · · · ·		


NOTE – SEE SKETCH ON BACK	NOTE -	SEE	SKET	CH	ON	BA	CK
---------------------------	--------	-----	------	----	----	----	----

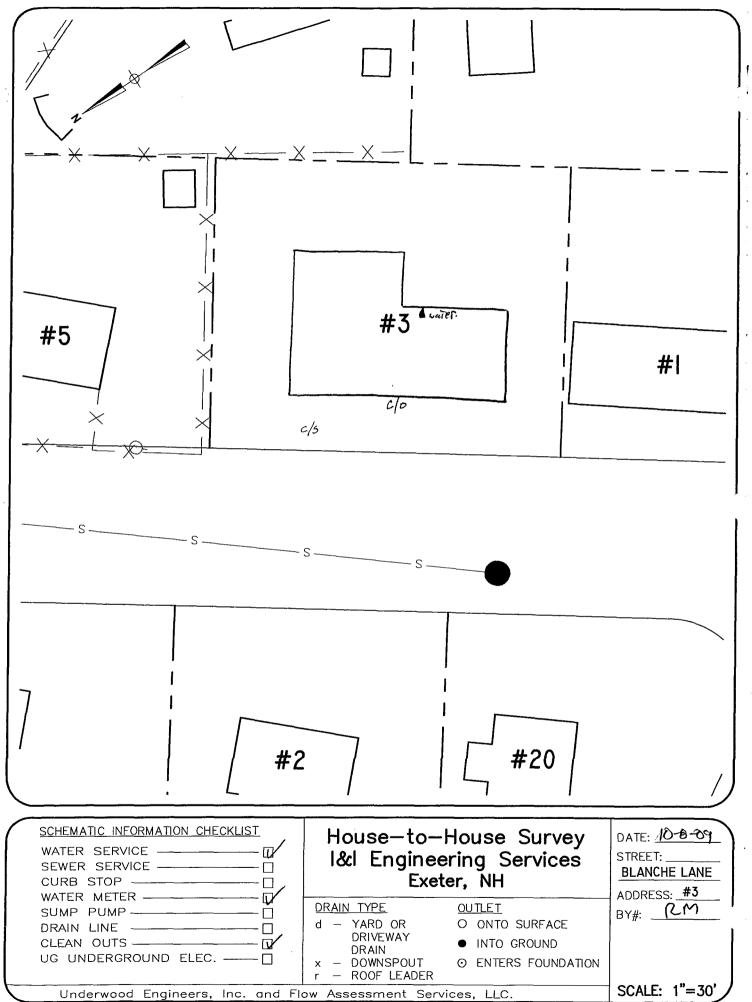

· _ _

.

/I Engine	ering Services H				Flow Assessment Service Bedford, NH
_ot #	Tax Map #	-Sub System	Street # 4 BLAN	VCHELN Inte	rviewer RM1R57/
Multi Unit Re	s 🗆 Single Unit Res 🛛	Commercial □ # of Un	its House Vacan	t 🖸	/
nitial Visit: I 2 nd Visit: I 3rd Visit: I	Date $\frac{10-8-09}{10-12-09}$ Date $\frac{10-12-09}{10-12-09}$	Time: <u>12:15</u> Time: <u>1043</u> 7 Time: <u>1256</u>	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted [] (Other Other のいんてい
. Have any of	the following problems of	occurred?		0	
Flooded Bas	sement 🗆 Sewage in Ba	sement 🗆 Clogged Pipe	Not Known 🗆 Other 🗆	······	
Comments:				·····	
. Is there a ba	sement? Full Basement	□ Crawl Space □ Sla	b Floor 🗆 Dirt Floor 🗆 Co	mments:	
. Sewer Invert	t Information? Cannot I	ocate 🗆 Distance From I	Basement Floor to Sill		
Above Floor	Level – Distance From I	nvert to Sill 🗆 📃	Unknown Distance	From Floor 🛛	Below Floor Level 🛛
Pipe Materia	l: Cast Iron □ PVC	Clay Other			
Comments: _					
				<u> </u>	
s there a Su	mp Pump? Yes 🗆 No				
If yes, where	e does the pump discharge	? Sanitary Sewer 🗆 Sej	parate Pipe Out 🗆 Surface 🗆	Cannot Locate 🗆	
Unknown 🗆	Other				
Are the follo		ent to collect water from th	ne floor? (indicate if connected np Pit 🗆 Recommend Dye T	l to sewer)	
Comments: _					<u> </u>
Any of the fo	llowing present outside th	e huilding (Put quantity of	bserved in spaces marked and in	adjuste if connected t	
			Ground RL		
	ain System 🗆 Yard Dra			Driveway Drain 🗆	
Comments: _		·	······································		
Water Service Cannot Locat		el 🛙 Distance from Sill		Below Floor Level	
			Other		
Pipe Material					······································
aeral Commer	nts:	Refusal By	ownor, would a	IT Give Fil	61 Name
		only Last.	unite) Ferale		
	KETCH ON BACK	U			

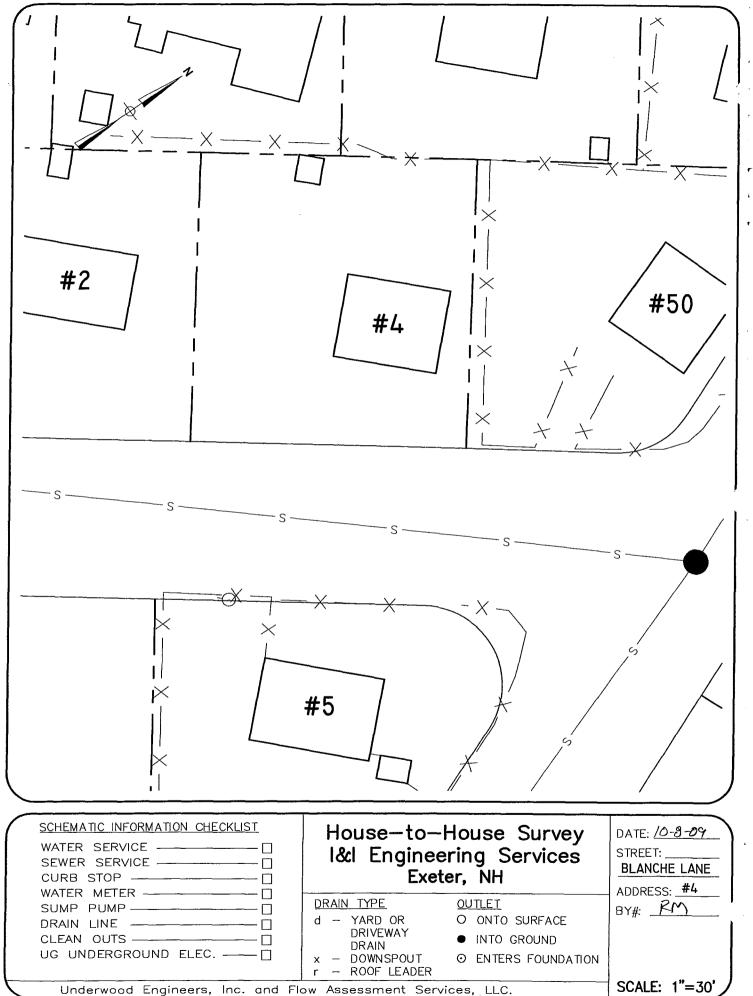

H:\SDSKPROJ\. 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:27:15 PM, rla


.

T Engineering Services ter, NH

.


Flow Assessment Services Bedford, NH

ot # Tax Map # Sub System Street # <u>5</u> BLANCHE LN_Interviewer_ <u>RM/EST/R</u>
Multi Unit Res 🗆 Single Unit Res 🗶 Commercial 🗆 # of Units House Vacant 🗆
uitial Visit: Date $/0-8-09$ Time: $/2:19$ Unsuccessful, Left FlyerNot AdmittedOther 2^{nd} Visit: Date $/0-12-09$ Time: $/04/1$ Unsuccessful, Left FlyerNot AdmittedOther 3^{rd} Visit: Date $/0-3-09$ Time: $/655-0$ UnsuccessfulNot AdmittedOther $10-13-09$ $17-35$ Not AdmittedOtherImage: Constraint of the state of the st
1. Have any of the following problems occurred?
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆
Comments:
Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comments:
. Sewer Invert Information? Cannot Locate C Distance From Basement Floor to Sill
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Floor 🗆 Below Floor Level 🛛
Pipe Material: Cast Iron D PVC D Clay D Other
Comments:
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface 🗆 Cannot Locate 🗆
Unknown 🗆 Other
Comments:
5. Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test
Comments:
. Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Driveway Drain 🗆
Comments:
· · · · · · · · · · · · · · · · · · ·
7. Water Service Information: Cannot Locate Above Floor Level Distance from Sill Below Floor Level
Pipe Material: Copper X Plastic I Iron I Lead I Other Comments:
eral Comments:
NOTE – SEE SKETCH ON BACK

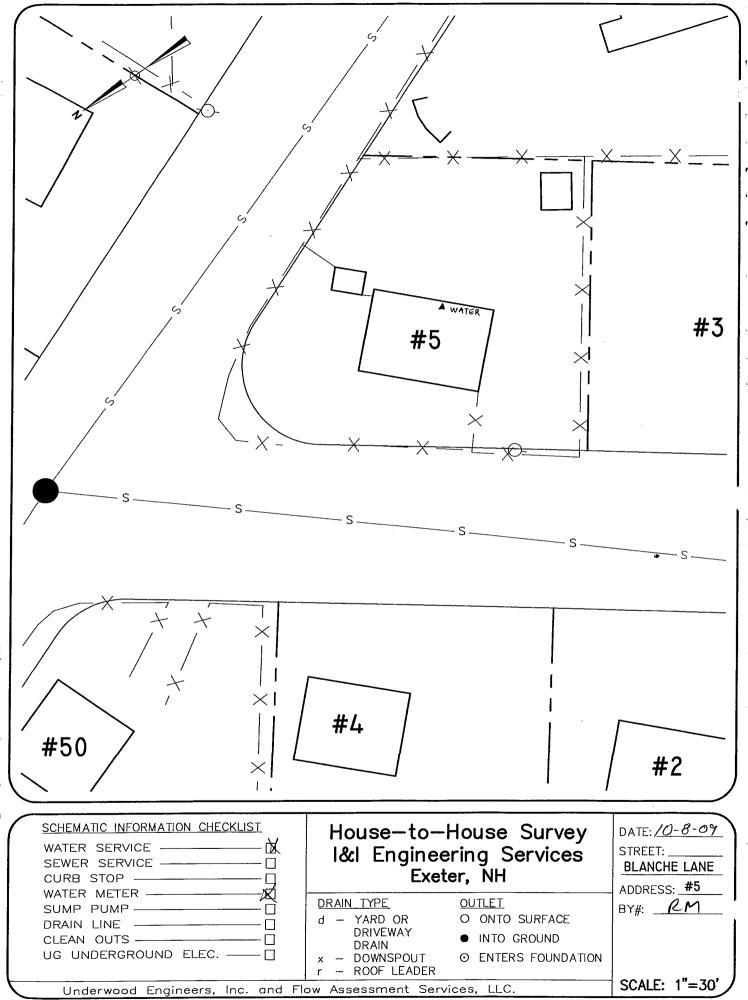

/I Engineering Services			Flow Assessment Services Bedford, NH
.ot # Tax Map #	Sub System	Street # 1 Laper	Le AVE Interviewer AST
Multi Unit Res 🗆 🛛 Single Unit Res 🛙			
nitial Visit: Date <u>16-7-09</u> 2 nd Visit: Date Brd Visit: Date	Time: Time: Time:	Unsuccessful, Left Flyer 🗆 Unsuccessful, Left Flyer 🗆 Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following problems	occurred?		
Flooded Basement 🗆 Sewage in Ba	asement 🛛 Clogged Pipe 🗆] Not Known 🗆 Other 🗆	
			mments: Parilaly Finished Basemeni
. Sewer Invert Information? Cannot	Locate 🗋 Distance From I	Basement Floor to Sill	16 "
			From Floor 🛛 Below Floor Level 🗗
Pipe Material: Cast Iron 🗹 PVC	C 🗆 Clay 🗆 Other		
Comments:		·····	
		<u></u>	
. J there a Sump Pump? Yes □ No) 🖸		χ.
If yes, where does the pump discharg	e? Sanitary Sewer 🗆 Sep	parate Pipe Out 🗆 Surface 🗆	Cannot Locate
Unknown 🗆 Other			
Are the following present in the baser Open Clean Out Basement Drain	nent to collect water from th	e floor? (indicate if connected	to sewer)
Comments: <u>1/0NC</u>			
Any of the following present outside t	he building (Put quantity of	oserved in spaces marked and ir	ndicate if connected to sewer)
Roof Leader (RL) Into Foundation	RL Into	Ground RL	Onto Surface
Flat Roof Drain System 🛙 Yard Dr			Driveway Drain
-			
Water Service Information: Cannot Locate D Above Floor Lev	vel 🗆 Distance from Sill		Below Floor Level
Pipe Material: Copper 🛛 Plastic	🗆 Iron 🗆 Lead 🗆	Other	Comments:
iéral Comments:			

JOTE – SEE SKETCH ON BACK

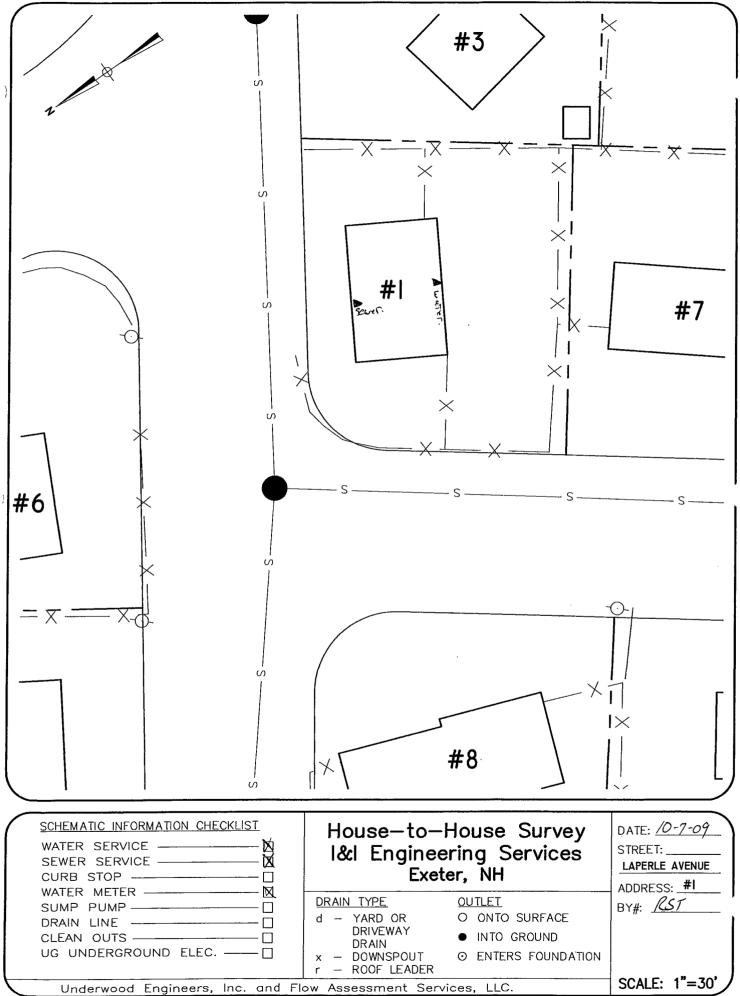


I/I Engineering Services Exeter, NH

Flow Assessment Services
Bedford, NH

_


	Гах Мар #	Sub System	Street # <u>6 Lap</u> e	rle AVE_Interviewer_/	231
Aulti Unit Res 🗆 🛛 🖇	ingle Unit Res 🛛	Commercial 🗆 # of Unit	ts House Vacant	: 🗆	
nitial Visit: Date ^{,nd} Visit: Date rd Visit: Date	10-7-09	Time: <u>////09</u> Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other	
	Sewage in Base	ement 🗆 Clogged Pipe 🗆			
			/	mments:	
. Sewer Invert Inform	ation? Cannot Lo	ocate Distance From E	Basement Floor to Sill		
			Unknown Distance	From Floor 🗆 🛛 Below I	Floor Level 🛛
Comments:	Me OWNER	Dors Not KNOW	where service is		
Unknown 🗆 Othe	r		oarate Pipe Out □ Surface □		
Open Clean Out	Basement Drain		ne floor? (indicate if connecte np Pit □ Recommend Dye '		
Any of the followin	g present outside th	e building (Put quantity of	bserved in spaces marked and i	ndicate if connected to sewer)	
Roof Leader (RL) I	nto Foundation	Ø, RL Into	Ground RI	. Onto Surface <u>2</u>	
Flat Roof Drain Sys	tem 🗆 Yard Dra	in □ Window Well Dra	in 🗆 Stair Well Drain 🗆	Driveway Drain 🗆	
Comments:					
		al 🗆 Distance from Sill		Below Floor Level	
Water Service Inform Cannot Locate □				2	
Cannot Locate 🗆			Other	_Comments:	

NOTE - SEE SKETCH ON BACK

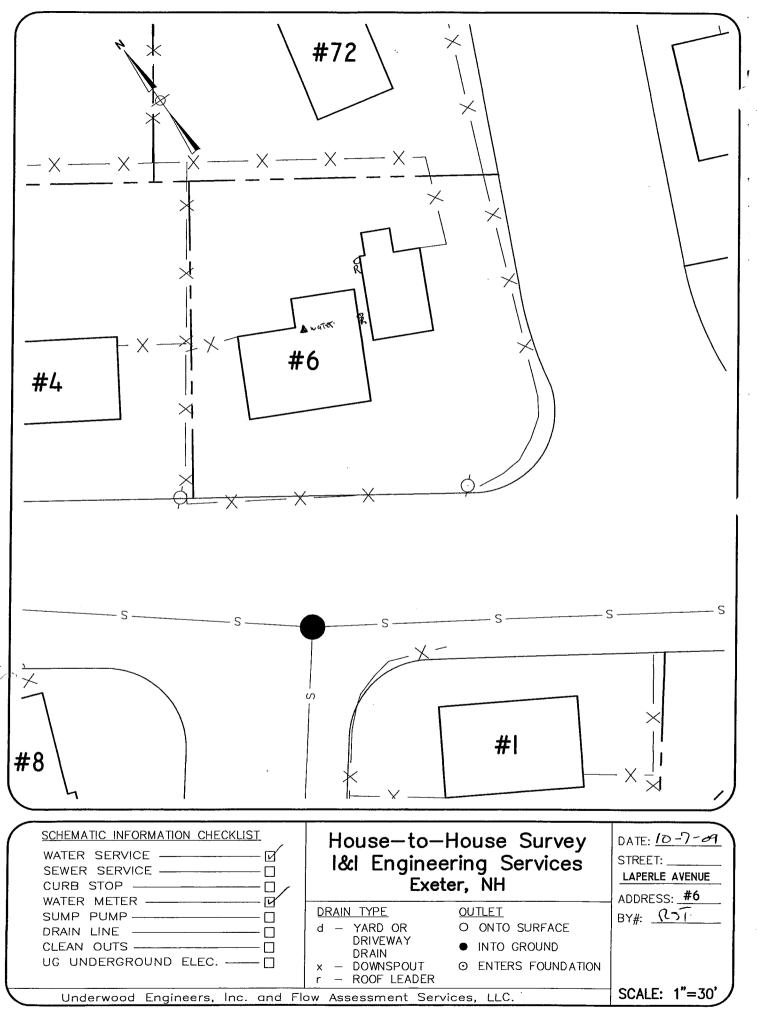

H:\SDSKPROJ\. j42LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009.2:05:48 PM, rta

I/I Engineering Services eter, NH				Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # Lqp.	erle Ave Inte	erviewer <u>RSI</u>
Multi Unit Res 🛛 🛛 Single Unit Res 🗹	/	-		
Initial Visit: Date $10 - 7 - 09$ 2^{nd} Visit: Date $3rd$ Visit: Date	Time: <u>1553</u> Time: Time:	Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🗆 Unsuccessful	Not Admitted \Box	Other Other Other
I. Have any of the following problems oc Flooded Basement □ Sewage in Base Comments:	ement 🗆 Clogged Pipe 🗆			
. Is there a basement? Full Basement 🗆	Crawl Space 🗆 Slat	b Floor 🛛 Dirt Floor 🗆 Co	nments:	
B. Sewer Invert Information? Cannot Lo Above Floor Level – Distance From Inv Pipe Material: Cast Iron D PVC I Comments: <u>home conver Think</u>	vert to Sill 🗆 🛛	Unknown Distance I	From Floor 🛛	
.s there a Sump Pump? Yes D No B If yes, where does the pump discharge? Unknown D Other Comments:	Sanitary Sewer 🗆 Sep			
Are the following present in the baseme Open Clean Out Basement Drain Comments:] Open Pipe 🗆 Sum	p Pit □ Recommend Dye T	est 🗆	
Any of the following present outside the	building (Put quantity ob	oserved in spaces marked and i	dicate if connected	to sewer)
Roof Leader (RL) Into Foundation	RL Into	Ground RL	Onto Surface	2
Flat Roof Drain System Vard Drain Comments:				
Water Service Information: Cannot Locate & Above Floor Level			Below Floor Level	
Pipe Material: Copper 🗆 Plastic 🗆	Iron 🗆 Lead 🗆	Other	Comments:	
iferal Comments: <u>Same inFo</u>	as sewet com	<u>א פמז א</u> י		

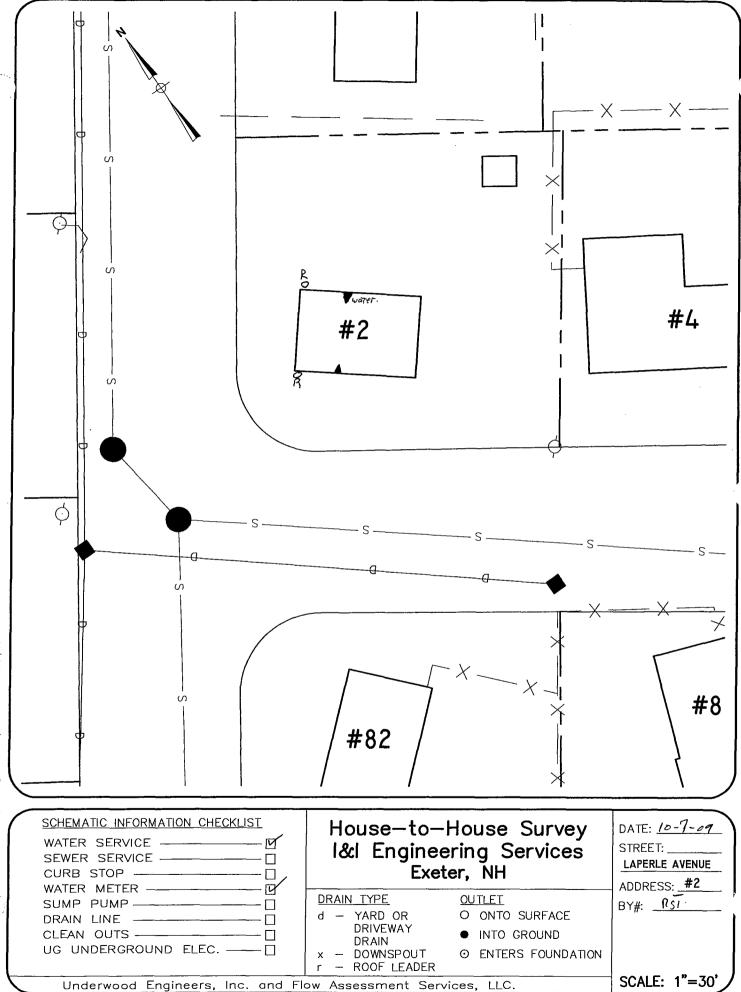


.

.....


I/I Engineering Services eter, NH			Flow Assessment Servic Bedford, NH
Lot # Tax Map #	Sub System	Street # <u>4 Lape</u>	erce AVE Interviewer <u>RST./RM</u>
Multi Unit Res 🗆 🛛 Single Unit Res 🗶	Commercial □ # of Units	s House Vacan	it 🗆
Initial Visit: Date $10 - 7 - 09$ 2^{nd} Visit: Date $10 - 8 - 09$ Brd Visit: Date	Time: <u>/664</u> Time: <u>/3:20</u> Time:	Unsuccessful, Left Flyer D Unsuccessful, Left Flyer D Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following problems c	occurred?		
Comments:			
. Is there a basement? Full Basement	□ Crawl Space □ Slab	Floor 🛛 Dirt Floor 🗆 Co	omments:
	avert to Sill 🗆	Unknown Distance I	
.s there a Sump Pump? Yes □ No	×		
			Cannot Locate 🗆
Are the following present in the basem Open Clean Out Basement Drain Comments: /	🗆 Open Pipe 🗆 Sump	Pit 🗆 Recommend Dye T	
Any of the following present outside th Roof Leader (RL) Into Foundation			•
Flat Roof Drain System Vard Dra Comments:			•
Water Service Information: Cannot Locate Above Floor Lev	el 🗆 Distance from Sill		Below Floor Level
Pipe Material: Copper 🛛 Plastic	🗆 Iron 🗆 Lead 🗆 O	ther	Comments:

NOTE - SEE SKETCH ON BACK

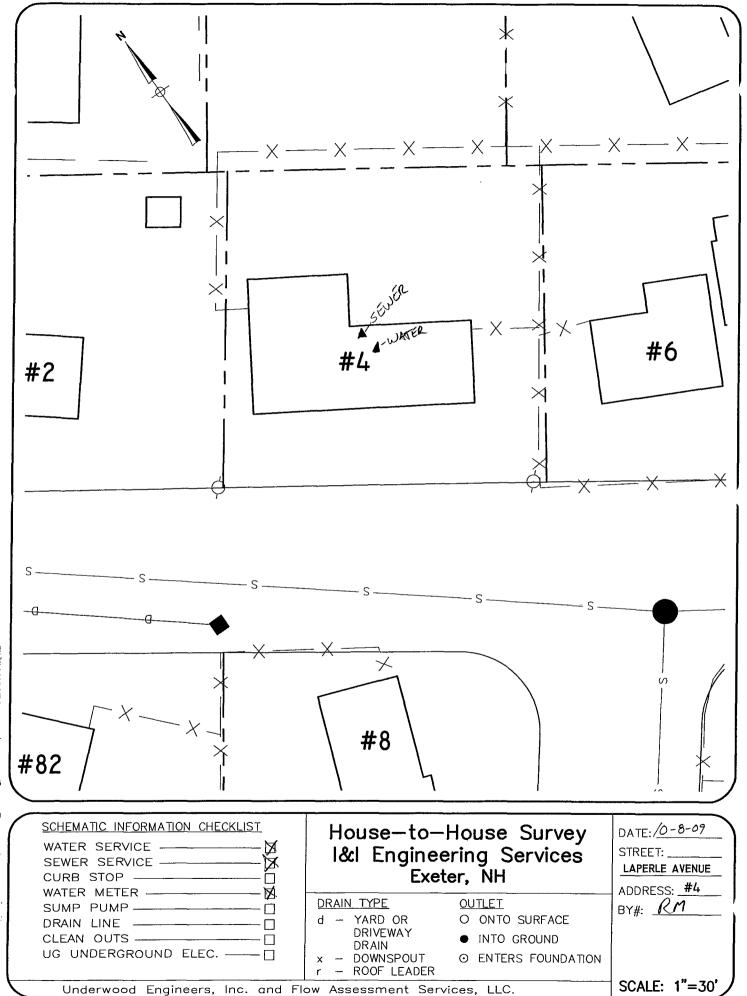

,	866 255 0654 668-679 ering Services H	HO	<u>USE SURVEY</u>		Flow Assessment Services Bedford, NH
Lot #	Tax Map #	Sub System	Street # 3 Lape	Ne AVE Ir	iterviewer_RST
	S 🗆 Single Unit Res 🗗 Co		,		
2 nd Visit: D	Date $10 - 7 - 09$ Ti Date $10 - 8 - 09$ Ti Date $10 - 12 - 09$ Ti 10 - 20 - 09 Ti	ime: 13-35 U	Insuccessful, Left Flyer 🗆 Insuccessful, Left Flyer 🗆 Insuccessful	Not Admitted □ Not Admitted □ Not Admitted □	
I. Have any of	the following problems occurr	red?			
Flooded Bas	ement 🗹 Sewage in Basemen	nt 🗆 Clogged Pipe 🗆 N	ot Known 🗆 Other 🗆		
Comments:				<u></u>	
	/				
. Is there a bas	sement? Full Basement	Crawl Space Slab Flo	oor 🗆 Dirt Floor 🗆 Co	mments:	
. Sewer Invert	Information? Cannot Locate	e 🗆 Distance From Base	ment Floor to Sill 72	2"	
Above Floor					Below Floor Level
	Level – Distance From Invert	to Sill 🗆	Unknown Distance	From Floor 🛛	-
Pipe Material	Level – Distance From Invert I: Cast Iron 🛛 PVC 🗆	to Sill □ Clay □ Other	Unknown Distance	From Floor 🛛	
Pipe Material	Level – Distance From Invert I: Cast Iron 🛛 PVC 🗆	to Sill □ Clay □ Other	Unknown Distance	From Floor 🛛	
Pipe Material Comments:	Level – Distance From Invert I: Cast Iron 🛛 PVC 🗆	to Sill □ Clay □ Other	Unknown Distance	From Floor 🛛	
Pipe Material Comments:	Level – Distance From Invert L: Cast Iron D PVC D mp Pump? Yes B No D	to Sill Clay D Other	Unknown Distance	From Floor	
Pipe Material Comments:	Level – Distance From Invert L: Cast Iron D PVC D mp Pump? Yes D No D does the pump discharge? Sat	to Sill Clay Dther nitary Sewer Separat	Unknown Distance	From Floor D]
Pipe Material Comments:	Level – Distance From Invert L: Cast Iron D PVC D mp Pump? Yes B No D does the pump discharge? Sau Other postable 5.	to Sill Clay Other	Unknown Distance) e Pipe Out 🗆 Surface 🕅 N N Col (d) -	From Floor D]
Pipe Material Comments:	Level – Distance From Invert L: Cast Iron D PVC D mp Pump? Yes B No D does the pump discharge? Sau Other postable 5.	to Sill Clay Other	Unknown Distance) e Pipe Out 🗆 Surface 🕅 N N Col (d) -	From Floor D]
Pipe Material Comments:	Level – Distance From Invert I: Cast Iron D PVC D mp Pump? Yes D No D does the pump discharge? Sat Other postable 5. wing present in the basement to	to Sill Clay Other It Other It Othe	Unknown Distance	From Floor Cannot Locate to sewer)]
Pipe Material Comments:	Level – Distance From Invert Cast Iron PVC mp Pump? Yes No does the pump discharge? Sat Other <u>postable 5</u> wing present in the basement to Dut Basement Drain	to Sill \Box Clay \Box Other nitary Sewer \Box Separat amp only take $amp only takeo collect water from the florOpen Pipe \Box Sump Pi$	Unknown Distance	From Floor Cannot Locate to sewer) 'est]
Pipe Material Comments:	Level – Distance From Invert Cast Iron PVC mp Pump? Yes No does the pump discharge? Sat Other <u>postable 5</u> wing present in the basement to Dut Basement Drain	to Sill \Box Clay \Box Other nitary Sewer \Box Separat amp only take $amp only takeo collect water from the florOpen Pipe \Box Sump Pi$	Unknown Distance	From Floor Cannot Locate to sewer) 'est]
Pipe Material Comments:	Level – Distance From Invert Cast Iron PVC mp Pump? Yes No does the pump discharge? Sat Other <u>postable 5</u> wing present in the basement to Dut Basement Drain	to Sill \Box Clay \Box Other nitary Sewer \Box Separat $amp only when o collect water from the flo Open Pipe \Box Sump Pid$ plastic out	Unknown Distance i e Pipe Out \Box Surface i h N $Celt d$ - bor? (indicate if connected t \Box Recommend Dye T $hole \cdot no T$ $acces$	From Floor Cannot Locate to sewer) est Sel322 Below	Floor ware.
Pipe Material Comments:	Level – Distance From Invert Cast Iron PVC mp Pump? Yes No does the pump discharge? Sat Other <u>postable 5</u> wing present in the basement to Dut Basement Drain <u>acces</u> <u>has place</u> Illowing present outside the bui	to Sill \Box Clay \Box Other nitary Sewer \Box Separat amp only when o collect water from the flor Open Pipe E Sump Pi amp pice Sump Pi	Unknown Distance	From Floor \Box Cannot Locate \Box I to sewer) est \Box Solution Below ndicate if connected	Fleer i.e. el.
Pipe Material Comments:	Level – Distance From Invert I: Cast Iron D PVC D mp Pump? Yes D No D does the pump discharge? Sat Other <u>portable 5</u> , wing present in the basement to Dut D Basement Drain D correct has placed Howing present outside the bui (RL) Into Foundation	to Sill \Box Clay \Box Other nitary Sewer \Box Separat $amp only when o collect water from the flor Open Pipe \Box Sump Pid \rho lastic osci ilding (Put quantity observed) RL Into Groups$	Unknown Distance	From Floor Cannot Locate Cannot Locate to sewer) 'est 'est Sol322 Below ndicate if connected Onto Surface	Fleer barel.
Pipe Material Comments:	Level – Distance From Invert Cast Iron D PVC D mp Pump? Yes D No D does the pump discharge? Sat Other <u>portable 5</u> , wing present in the basement to Dut D Basement Drain D Cover has placed Howing present outside the bui (RL) Into Foundation <u></u>	to Sill \Box Clay \Box Other nitary Sewer \Box Separat $amp only alle o collect water from the flo Open Pipe \Box Sump Pid \rho lastic ostic ilding (Put quantity observer) RL Into Group Window Well Drain \Box$	Unknown Distance	From Floor Cannot Locate Cannot Locate to sewer) 'est 'est dicate if connected Onto Surface Driveway Drain	Fleer barel.
Pipe Material Comments:	Level – Distance From Invert I: Cast Iron D PVC D mp Pump? Yes D No D does the pump discharge? Sat Other <u>portable 5</u> , wing present in the basement to Dut D Basement Drain D correct has placed Howing present outside the bui (RL) Into Foundation	to Sill \Box Clay \Box Other nitary Sewer \Box Separat $amp only alle o collect water from the flo Open Pipe \Box Sump Pid \rho lastic ostic ilding (Put quantity observer) RL Into Group Window Well Drain \Box$	Unknown Distance	From Floor Cannot Locate Cannot Locate to sewer) 'est 'est dicate if connected Onto Surface Driveway Drain	Fleer barel.
Pipe Material Comments:	Level – Distance From Invert I: Cast Iron \square PVC \square mp Pump? Yes \square No \square does the pump discharge? Sat Other \square \square \square \square wing present in the basement to Dut \square Basement Drain \square \square \square \square \square \square Illowing present outside the bui (RL) Into Foundation \square ain System \square Yard Drain \square	to Sill \Box Clay \Box Other nitary Sewer \Box Separat $amp only alle o collect water from the flo Open Pipe \Box Sump Pid \rho lastic ostic ilding (Put quantity observer) RL Into Group Window Well Drain \Box$	Unknown Distance	From Floor Cannot Locate Cannot Locate to sewer) 'est 'est dicate if connected Onto Surface Driveway Drain	Fleer Level.
Pipe Material Comments:	Level – Distance From Invert : Cast Iron \square PVC \square mp Pump? Yes \square No \square does the pump discharge? Sat Other $_ \rho \circ \overline{r} \circ h e _ 5 \circ$ wing present in the basement to Dut \square Basement Drain \square \square \square \square \square (RL) Into Foundation $_$ ain System \square Yard Drain \square Information: \blacksquare Above Floor Level \square	to Sill \Box Clay \Box Other nitary Sewer \Box Separat amp only when $amp only when amp only when a$	Unknown Distance i e Pipe Out \Box Surface \swarrow \frown \checkmark	From Floor	Fleer Level.


NOTE - SEE SKETCH ON BACK

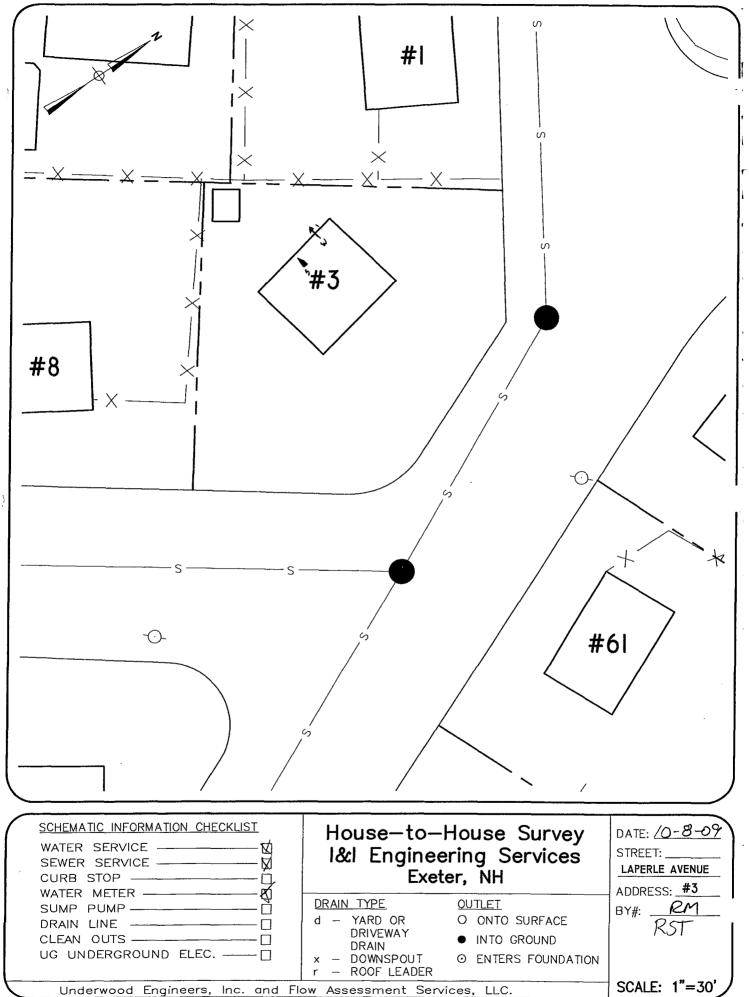

I/I Engineering Services	HOUSE SURVEY COMMENTS	Flow Assessment Services Bedford, NH
		•
Lot # Tax Map # Sub System _		Interviewer \checkmark
Multi Unit Res 🗆 Single Unit Res 🕅 Commercial 🗆 # of		
Initial Visit: Date $\frac{10-3-09}{10-3-09}$ Time: $\frac{11:35}{106-55}$ 3rd Visit: Date $\frac{10-3-09}{10-19-09}$ Time: $\frac{16-55}{106-55}$ Time: $\frac{16-55}{106-55}$	Unsuccessful, Left Flyer D Not A Unsuccessful, Left Flyer D Not A Unsuccessful Not A	dmitted □ Other dmitted □ Other admitted □ Other
 Have any of the following problems occurred? Flooded Basement Sewage in Basement Clogged Pip Comments: 		
2. Is there a basement? Full Basement Crawl Space	Slab Floor Dirt Floor Comments	:
3. Sewer Invert Information? Cannot Locate Distance Fro Above Floor Level – Distance From Invert to Sill Pipe Material: Cast Iron PVC Clay Other Comments:	Unknown Distance From Flo	oor 🗆 Below Floor Level 🗆
there a Sump Pump? Yes D No D If yes, where does the pump discharge? Sanitary Sewer D Unknown D Other Comments:	· · · · · · · · · · · · · · · · · · ·	
5. Are the following present in the basement to collect water from Open Clean Out Basement Drain Open Pipe Somments:	Sump Pit Recommend Dye Test	
. Any of the following present outside the building (Put quantit Roof Leader (RL) Into Foundation RL H Flat Roof Drain System □ Yard Drain □ Window Well J Comments:	into Ground RL Onto Su Drain 🗆 Stair Well Drain 🗆 Drivewa	urface
. Water Service Information: Cannot Locate Above Floor Level Distance from Sill Pipe Material: Copper Plastic Iron Lead (Below F	Floor Level 🛛
and a comments: /NSPECTION CAN ONLY BE COMP	LETED DURRING THE MORNING	HOURS /8-9 AM

.


NOTE - SEE SKETCH ON BACK

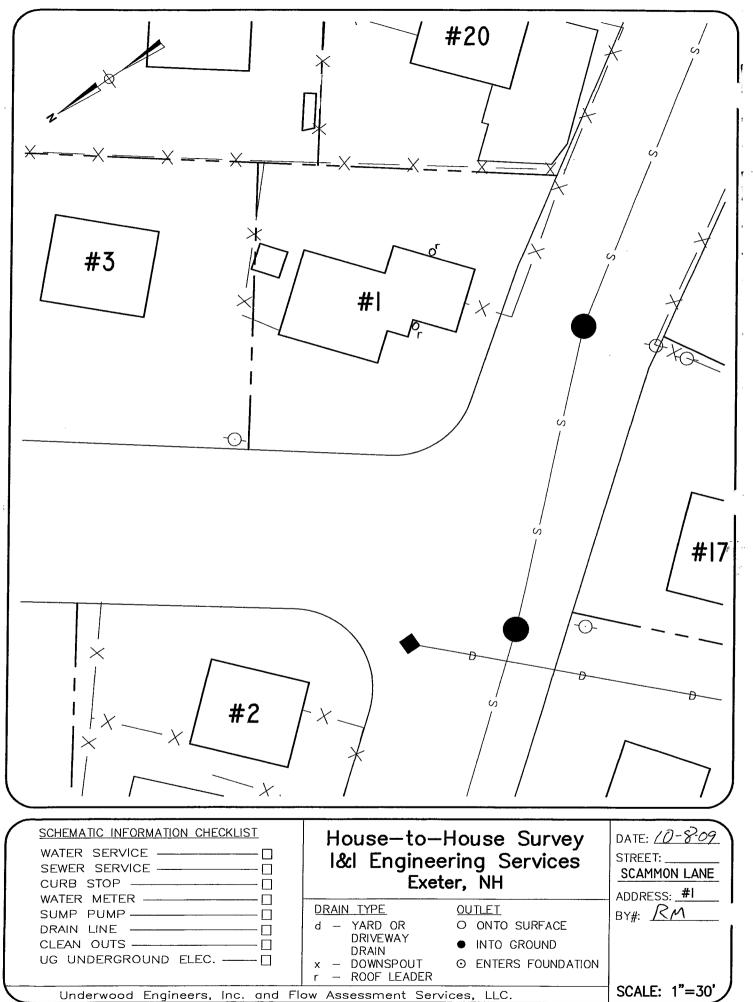

H:\SDSKPROJI. _____. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:27:15 PM, rla


I/I Engineering Services Exeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # <u>2 Scammon Lo</u>	Interviewer <u>RST/ppc</u>
Multi Unit Res 🛛 Single Unit Res 🖬 Commercial 🗆 # of Units House Vacant 🗆	
Initial Visit:Date $(o-b-oq)$ Time: $1/20$ Unsuccessful, Left FlyerNot Admitted 2^{nd} Visit:DateTime:Unsuccessful, Left FlyerNot Admitted $3rd$ Visit:DateTime:UnsuccessfulNot Admitted $3rd$ Visit:DateTime:UnsuccessfulNot Admitted	Other Other Other Other
1. Have any of the following problems occurred? Flooded Basement B Sewage in Basement Clogged Pipe Not Known Other Other Comments: <u>four outage Sump pump Failed</u> . 7" of water in basement	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
3. Sewer Invert Information? Cannot Locate I Distance From Basement Floor to Sill	
s there a Sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Cannot Locat Unknown & Other Comments: <u>4es Sump pump but unknown where</u> is discharges 70. fipe G	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connect Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Driveway Drain Comments:	2
Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level □ Pipe Material: Copper I Plastic □ Iron □ Lead □ Other Comments:	-

NOTE - SEE SKETCH ON BACK

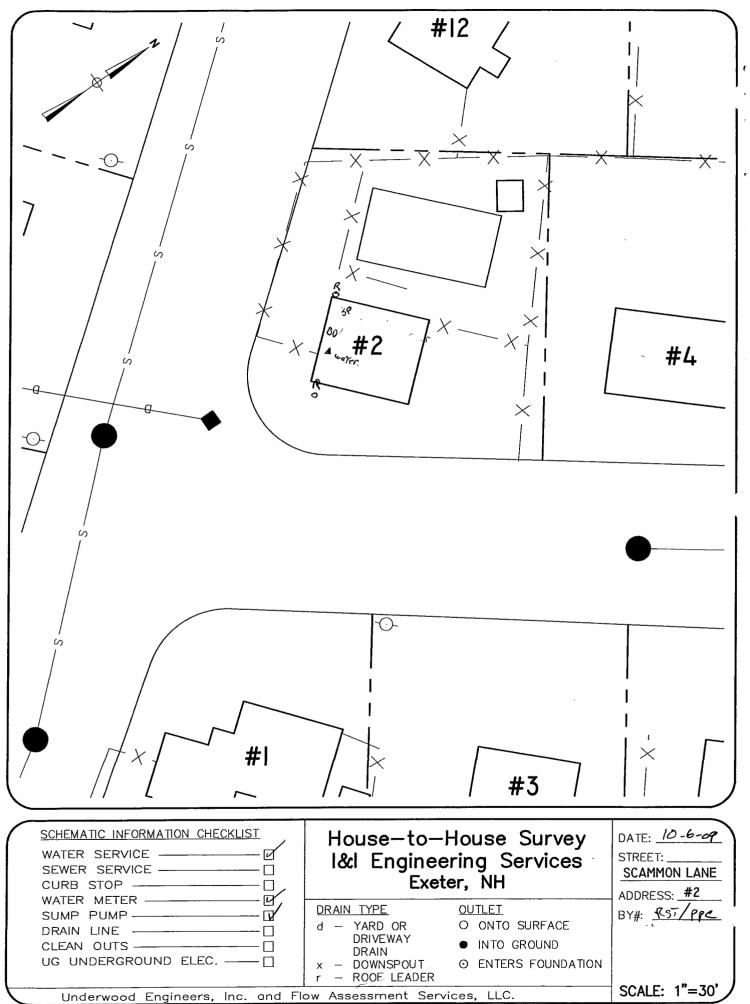

Lot # Tax Map # Sub System Street # <u>3</u> SCAMMON <u>LN</u>	Interviewer 12M/RS/
Multi Unit Res 🛛 Single Unit Res 🕰 Commercial 🗆 # of Units House Vacant 🗆	ť
$2^{\mu\nu}$ Visit: Date $/0^{-}/2^{-}0^{-}/2$ Time: $1/2^{-}3^{-}$ Unsuccessful, Left Flyer \Box Not Admitted	Other Other Other Other Other
Have any of the following problems occurred? Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known □ Other □ Comments:	
. Is there a basement? Full Basement I Crawl Space Slab Floor D Dirt Floor Comments:	
Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill Above Floor Level – Distance From Invert to Sill Pipe Material: Cast Iron PVC Clay Other Comments:	
.s there a Sump Pump? Yes I No If yes, where does the pump discharge? Sanitary Sewer I Separate Pipe Out I Surface I Cannot Locate Unknown I Other Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connec Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface _(Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Driveway Drain Comments:	
Water Service Information: Cannot Locate Above Floor Level Distance from Sill Below Floor Level	_
Pipe Material: Copper A Plastic I Iron I Lead I Other Comments:	
neral Comments:	


NOTE - SEE SKETCH ON BACK

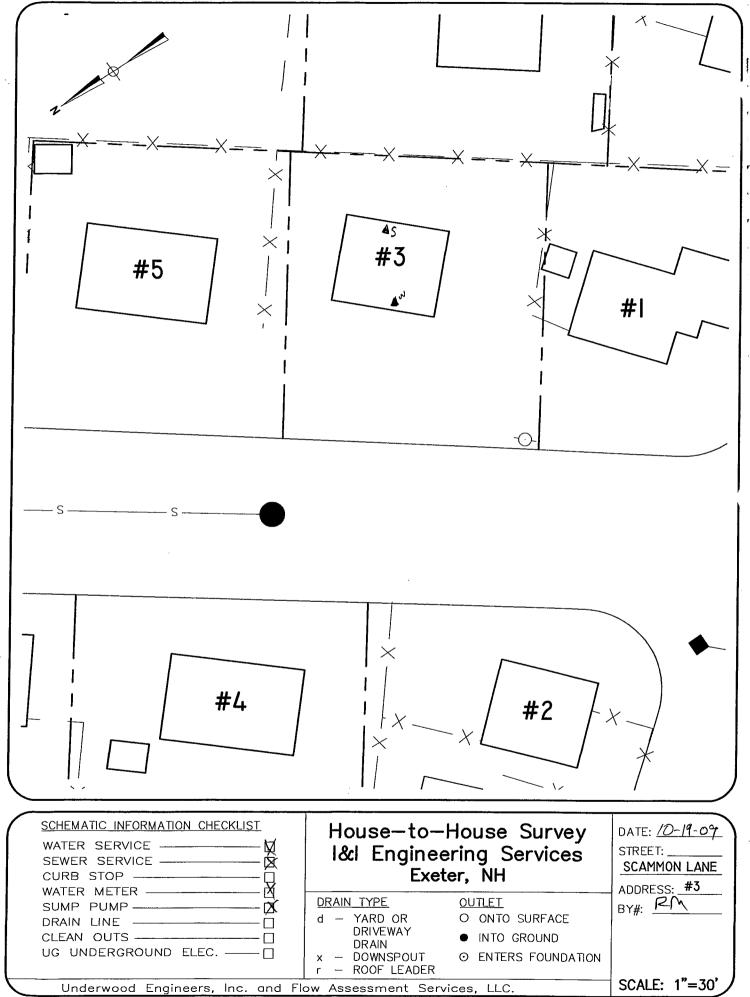

542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:26:07 PM, rla H:\SDSKPROJ\

			Bedford, NH
			MON LN Interviewer RN/RGI
Multi Unit Res 🗆 🛛 Single Unit Res 🕅			
nitial Visit: Date $10 - 8 - 9$ 2^{nd} Visit: Date $10 - 2 - 9$ 2^{nd} Visit: Date	Time: <u>//:40</u> Time: <u>///@</u> Time:	Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🗆 Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following problems of			
Flooded Basement D Sewage in Ba	sement 🛛 Clogged Pipe 🗆	Not Known 🛛 Other 🗆	
Comments:			
	/		mments:
Sewer Invert Information? Cannot I	Locate Distance From Ba	asement Floor to Sill 8	/1
Above Floor Level - Distance From I	nvert to Sill 🗆	Unknown Distance I	From Floor 🛛 🛛 Below Floor Level 🕼
Pipe Material: Cast Iron V PVC	C Clay C Other		
Comments:			
	<u>,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,</u>	<u></u>	
s there a Sump Pump? Yes I No	П		
	,		
If yes, where does the pump discharge	,	arate Pipe Out 🗆 Surface 🗆	Cannot Locate 🗆
If yes, where does the pump discharge	e? Sanitary Sewer 🗹 Sepa		Cannot Locate 🗆
If yes, where does the pump discharge	e? Sanitary Sewer 🗹 Sepa		
If yes, where does the pump discharge Unknown D Other Comments: Are the following present in the basen Open Clean Out D Basement Drain	e? Sanitary Sewer 🗹 Sepa nent to collect water from the Dopen Pipe D Sump	e floor? (indicate if connected o Pit P Recommend Dye T	l to sewer) est □
If yes, where does the pump discharge Unknown □ Other Comments: Are the following present in the basen Open Clean Out □ Basement Drain Comments:	e? Sanitary Sewer 🗹 Sepa nent to collect water from the Dopen Pipe D Sump	e floor? (indicate if connected o Pit P Recommend Dye T	l to sewer) 'est □
If yes, where does the pump discharge Unknown □ Other Comments: Are the following present in the basen Open Clean Out □ Basement Drain Comments:	e? Sanitary Sewer 🗹 Sepa nent to collect water from the Dopen Pipe D Sump ne building (Put quantity obs	e floor? (indicate if connected o Pit D Recommend Dye T served in spaces marked and in	to sewer) est dicate if connected to sewer)
If yes, where does the pump discharge Unknown D Other Comments: Are the following present in the basen Open Clean Out D Basement Drain Comments: Any of the following present outside the Roof Leader (RL) Into Foundation	e? Sanitary Sewer 🗹 Sepa hent to collect water from the Open Pipe 🗆 Sump he building (Put quantity obs RL Into O	e floor? (indicate if connected o Pit 19 Recommend Dye T served in spaces marked and in Ground RL	to sewer) est dicate if connected to sewer)
If yes, where does the pump discharge Unknown D Other Comments: Are the following present in the basen Open Clean Out D Basement Drain Comments: Any of the following present outside the Roof Leader (RL) Into Foundation	e? Sanitary Sewer 🗹 Sepa hent to collect water from the Open Pipe 🗆 Sump he building (Put quantity obs RL Into C ain 🗆 Window Well Drain	e floor? (indicate if connected o Pit 19 Recommend Dye T served in spaces marked and in Ground RL n Stair Well Drain 1	I to sewer) est ndicate if connected to sewer) Onto Surface Driveway Drain
If yes, where does the pump discharge Unknown □ Other Comments: Are the following present in the basem Open Clean Out □ Basement Drain Comments: Any of the following present outside th Roof Leader (RL) Into Foundation Flat Roof Drain System □ Yard Dra Comments: Water Service Information:	e? Sanitary Sewer 🗹 Sepa	e floor? (indicate if connected o Pit N Recommend Dye T served in spaces marked and in Ground RL n Stair Well Drain	I to sewer) est ndicate if connected to sewer) Onto Surface Driveway Drain
If yes, where does the pump discharge Unknown □ Other Comments: Are the following present in the basem Open Clean Out □ Basement Drain Comments: Any of the following present outside th Roof Leader (RL) Into Foundation Flat Roof Drain System □ Yard Dra Comments: Water Service Information: Cannot Locate □ Above Floor Leve	e? Sanitary Sewer 🗹 Sepa nent to collect water from the Open Pipe 🗆 Sump ne building (Put quantity obs RL Into C ain 🗆 Window Well Drain vel 🗆 Distance from Sill	e floor? (indicate if connected o Pit N Recommend Dye T served in spaces marked and in Ground RL n Stair Well Drain	to sewer) est ndicate if connected to sewer) Onto Surface Driveway Drain
If yes, where does the pump discharge Unknown □ Other Comments: Are the following present in the basen Open Clean Out □ Basement Drain Comments: Any of the following present outside the Roof Leader (RL) Into Foundation Flat Roof Drain System □ Yard Dray Comments: Water Service Information: Cannot Locate □ Above Floor Leve Pipe Material: Copper □ Plastic	e? Sanitary Sewer 🗹 Sepa	e floor? (indicate if connected o Pit 12 Recommend Dye T served in spaces marked and in Ground RL n Stair Well Drain Other	I to sewer) Pest Pest Pest

NOTE - SEE SKETCH ON BACK

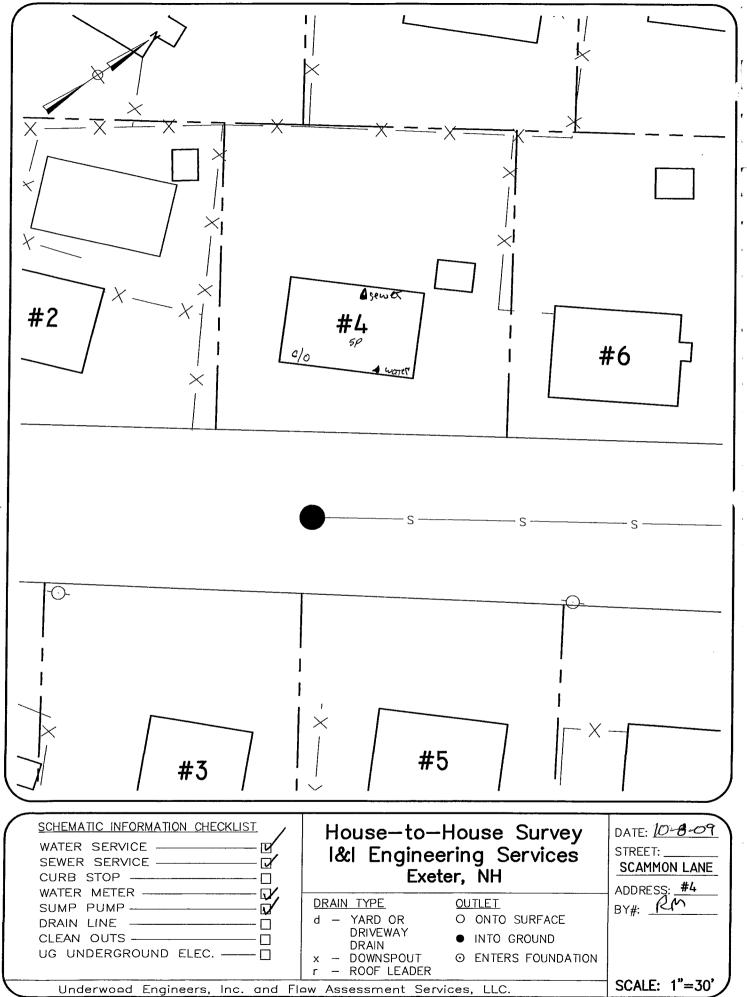


H:\SDSKPRDJ\. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:50:39 PM, rla

.

/I Engineering Services	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub System Street # <u>5</u> , <u>SCAMMON</u> LN	Interviewer RM
Multi Unit Res 🗆 Single Unit Res 🛠 Commercial 🗆 # of Units House Vacant 🗆	
itial Visit: Date Image: Comparison of the second seco	ed A Other ed D Other red D Other
1. Have any of the following problems occurred?	
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments:	
. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comments:	
. Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	
Above Floor Level – Distance From Invert to Sill 🛛 Unknown Distance From Floor	Below Floor Level
Pipe Material: Cast Iron D · PVC D Clay D Other	
Comments:	
, there a Sump Pump? Yes D No D	
If yes, where does the pump discharge? Sanitary Sewer D Separate Pipe Out D Surface D Cannot Loo	cate 🗆
Unknown 🛛 Other	
Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	·······
Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if come \widehat{a})	
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	e
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Driveway Dra	in 🗆
Comments:	
Water Service Information: Cannot Locate Above Floor Level Distance from Sill Below Floor Below Floor	
Pipe Material: Copper Plastic Iron Lead Other Comments:	
meral Comments: ReFused Access BY OWNER.	


NOTE – SEE SKETCH ON BACK

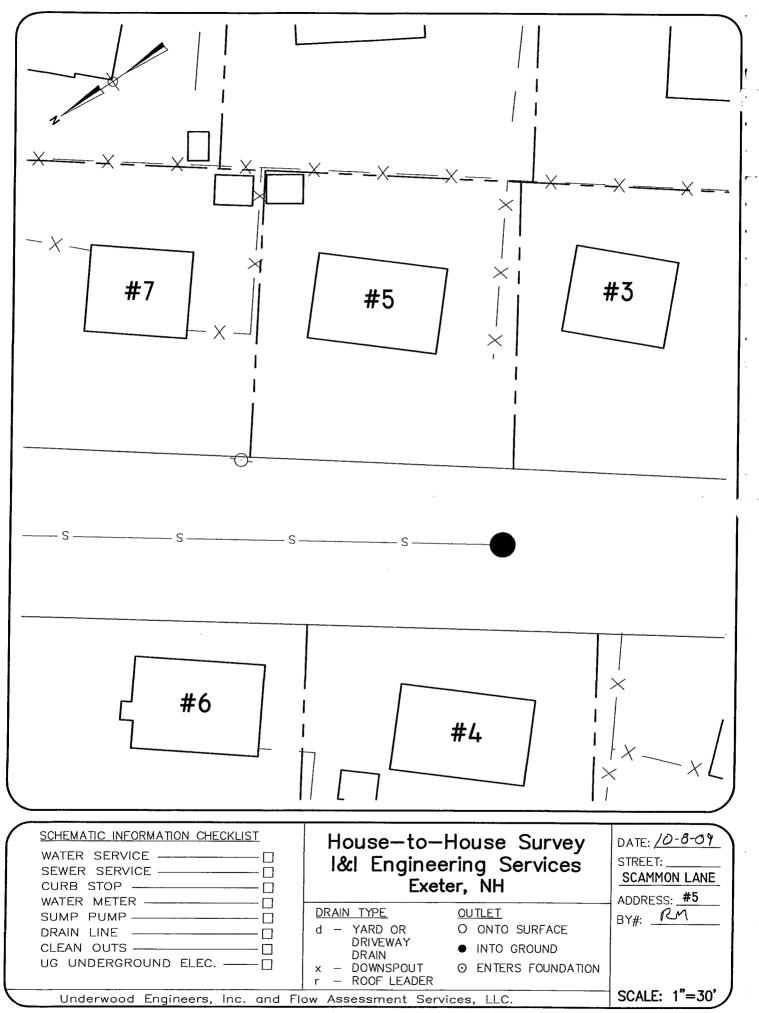

H:\SDSKPROJVi. 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:24:44 PM, rla

/I Engineering Services ⁷ ∗ter, NH	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub \$ystem Street # 6 Scammon Ln	Interviewer RM/RST
Aulti Unit Res 🗆 Single Unit Res 🗶 Commercial 🗆 # of Units House Vacant 🗆	,
nd Visit: Date //)-/2-09 Time: ///(/////////////////////////////////	d Other
. Have any of the following problems occurred? Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known □ Other □ Comments:	
Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comments:	
Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill Above Floor Level – Distance From Invert to Sill Unknown Distance From Floor Pipe Material: Cast Iron PVC Clay Other Comments:	Below Floor Level
there a Sump Pump? Yes I No I If yes, where does the pump discharge? Sanitary Sewer I Separate Pipe Out I Surface I Cannot Loc Unknown I Other	
Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if conn Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface Flat Roof Drain System D Yard Drain D Window Well Drain D Stair Well Drain D Driveway Drat Comments:	 in []
Water Service Information: Cannot Locate Above Floor Level Distance from SillBelow Floor I Pipe Material: Copper Plastic Iron Lead OtherComments:	Level
actal Comments:	

OTE – SEE SKETCH ON BACK

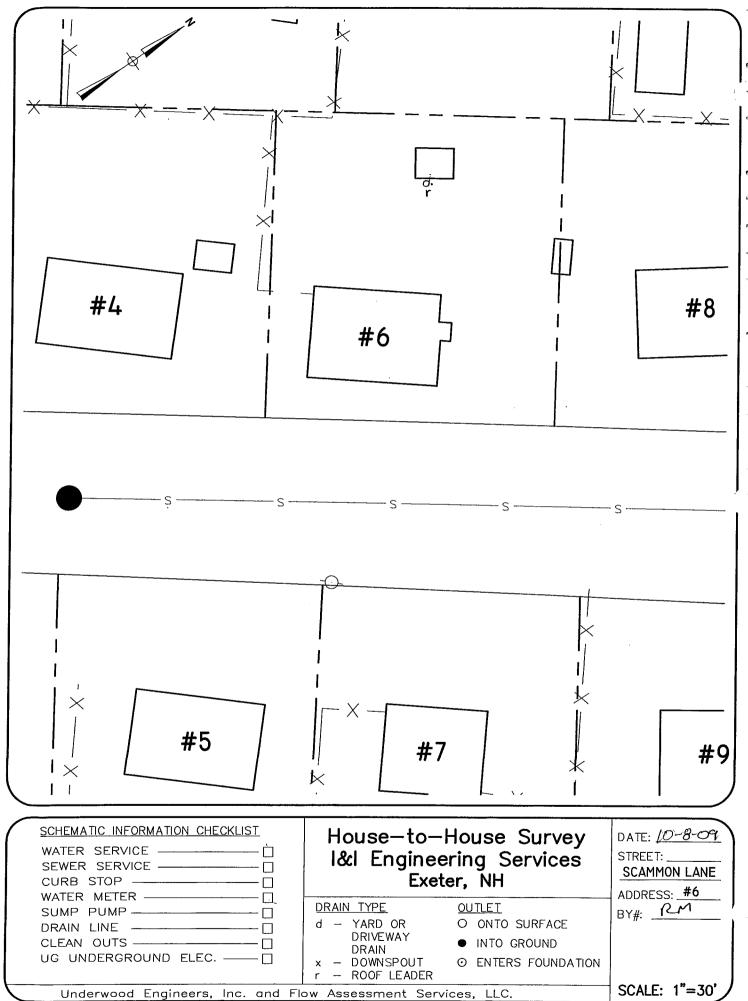


I/I Engineering Services Exeter, NH

Flow Assessment Services Bedford, NH

Lot #	Sr
1. Have any of the following problems occurred? Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known □ Other □	
Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known □ Other □ Comments: 2. Is there a basement? Full Basement □ Crawl Space □ Slab Floor □ Dirt Floor □ Comments: 3. Sewer Invert Information? Cannot Locate □ Distance From Basement Floor to Sill	
3. Sewer Invert Information? Cannot Locate □ Distance From Basement Floor to Sill	
Above Floor Level – Distance From Invert to Sill □ Unknown Distance From Floor □ Below Floor Level Pipe Material: Cast Iron □ PVC □ Clay □ Other Comments:	
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Cannot Locate Unknown Other Comments: S. Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments: Comments: Comments: Comments: Roof the following present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer) Roof Leader (RL) Into Foundation Variable Vard Drain Vard Drain Vard Drain Vard Drain Vard Drain Vard Drain Vard Vard Vard Vard Vard Vard Vard Vard	_
Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Roof Leader (RL) Into Foundation O RL Into Ground O RL Onto Surface O Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Drain	
 Water Service Information: Cannot Locate Above Floor Level Distance from Sill Below Floor Level Pipe Material: Copper Plastic Iron Lead OtherComments: 	
ieral Comments:	


NOTE - SEE SKETCH ON BACK

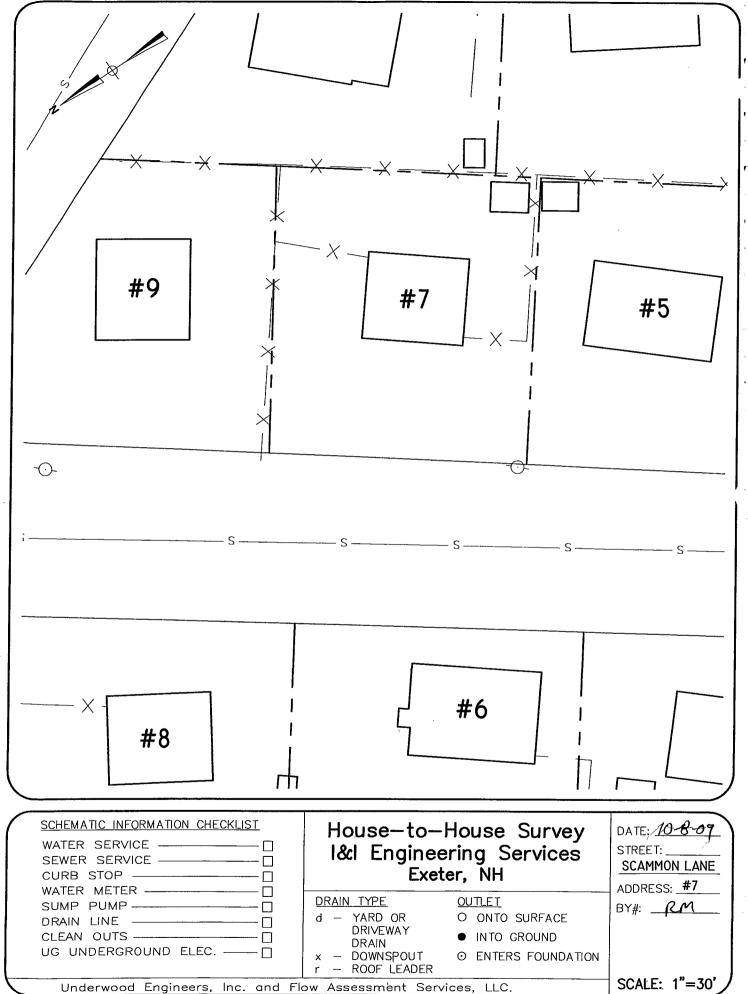

H:\SDSKPROJN; 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:23:58 PM, rla

.


/I Engineering Services Ster, NH	HOME OWNER SA	Flow A Bedfor B SHE WILL CALL FOR APPOINT MO	ssessment Services d, NH ENT
		Street # 8 SCAMMON LN Interviewer	
Multi Unit Res 🛛 🛛 Single Unit F	es Commercial 🗆 # of Units	House Vacant 🗆 🔗	
nitial Visit: Date $10 - 8 - 09$ 2^{nd} Visit: Date 3rd Visit: Date	Time: // :5 8 Unsucc Time: Unsucc Time: Unsucc	cessful, Left Flyer Not Admitted Other cessful, Left Flyer Not Admitted Other cessful Not Admitted Other	
	n Basement 🗆 Clogged Pipe 🗆 Not Kn	nown 🗆 Other 🗆	
. Is there a basement? Full Baser	ient 🗆 Crawl Space 🗆 Slab Floor 🗆	Dirt Floor Comments:	
Above Floor Level – Distance Fr Pipe Material: Cast Iron 🗆			
Unknown 🛛 Other	harge? Sanitary Sewer 🗆 Separate Pipe	e Out 🗆 Surface 🗆 Cannot Locate 🗆	
Open Clean Out 🛛 Basement I	Dasement to collect water from the floor? Drain □ Open Pipe □ Sump Pit □		
Any of the following present outs	ide the building (Put quantity observed in	spaces marked and indicate if connected to sewer)	
Roof Leader (RL) Into Foundation	n RL Into Ground _	RL Onto Surface	
Comments:		air Well Drain 🗆 Driveway Drain 🗆	
Water Service Information:	r Level 🗆 Distance from Sill		
Pipe Material: Copper D Pla	ustic 🗌 Iron 🗌 Lead 🗌 Other	Comments:	
·		comments:	

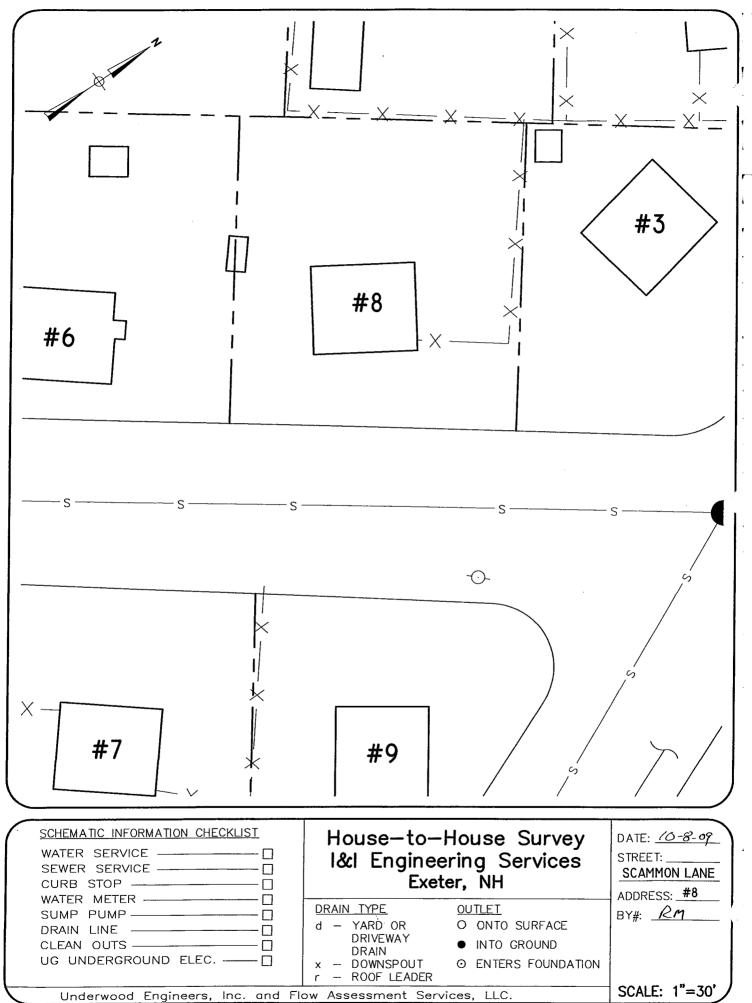

H:\SDSKPROJ\. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:48:43 PM, rla


I/I Engineering Services				Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # Sca	MODN LN	Interviewer RM/RST/R
Multi Unit Res 🗆 Single Unit Res 📈 Com	mercial 🗆 # of Units	House Vaca	nt 🛙	, ,
Initial Visit:Date $10-8-09$ Time 2^{nd} Visit:Date $10-12-09$ TimeBrd Visit:Date $10-13-09$ Time	e: <u>11:59</u>	Unsuccessful, Left Flyer	Not Admitted	□ Other
$\frac{1000}{1000} = \frac{1000}{1000} = \frac{1000}{1000$	e: <u>////2</u> e: <u>///:/2</u>	Unsuccessful Unsuccessful	Not Admitted Not Admitted	Other Other
I. Have any of the following problems occurred	?			
Flooded Basement Sewage in Basement Comments:				
2. Is there a basement? Full Basement 🗙 Cr	awl Space □ Slab F	Floor 🗆 Dirt Floor 🗆 C	omments:	
. Sewer Invert Information? Cannot Locate	Distance From Bas	ement Floor to Sill	2.5"	
Above Floor Level – Distance From Invert to	Sill 🗆 🔄	Unknown Distance	From Floor 🛛	Below Floor Level
Pipe Material: Cast Iron 🗶 PVC 🗆 🤇	Clay 🗆 Other			
Comments:			<u> </u>	
		<u></u>		<u> </u>
.s there a Sump Pump? Yes 🖌 No □				_
If yes, where does the pump discharge? Sanit	<i>V</i> ×			
Unknown 🛛 Other				
Comments:				
Are the following present in the basement to c Open Clean Out Basement Drain O STAINWELL DRAIN	collect water from the f pen Pipe Sump	loor? (indicate if connecte Pit A Recommend Dye	ed to sewer) Test □	
Comments:				
Any of the following present outside the build	ing (Put quantity obse	rved in spaces marked and	indicate if connec	ted to sewer)
Roof Leader (RL) Into FoundationO	RL Into Gr	ound <u>C</u> R	L Onto Surface _	2
Flat Roof Drain System 🗆 Yard Drain 🗆	Window Well Drain	🗆 Stair Well Drain 🗆	Driveway Drain	
Comments:				
Water Service Information: Cannot Locate D Above Floor Level D Di	stance from Sill		Below Floor Lev	vel 🖉
Pipe Material: Copper 🗶 Plastic 🗆 In	ron 🗆 Lead 🗆 Ot	her	_ Comments:	
neral Comments:	·····			
		·····		

NOTE – SEE SKETCH ON BACK

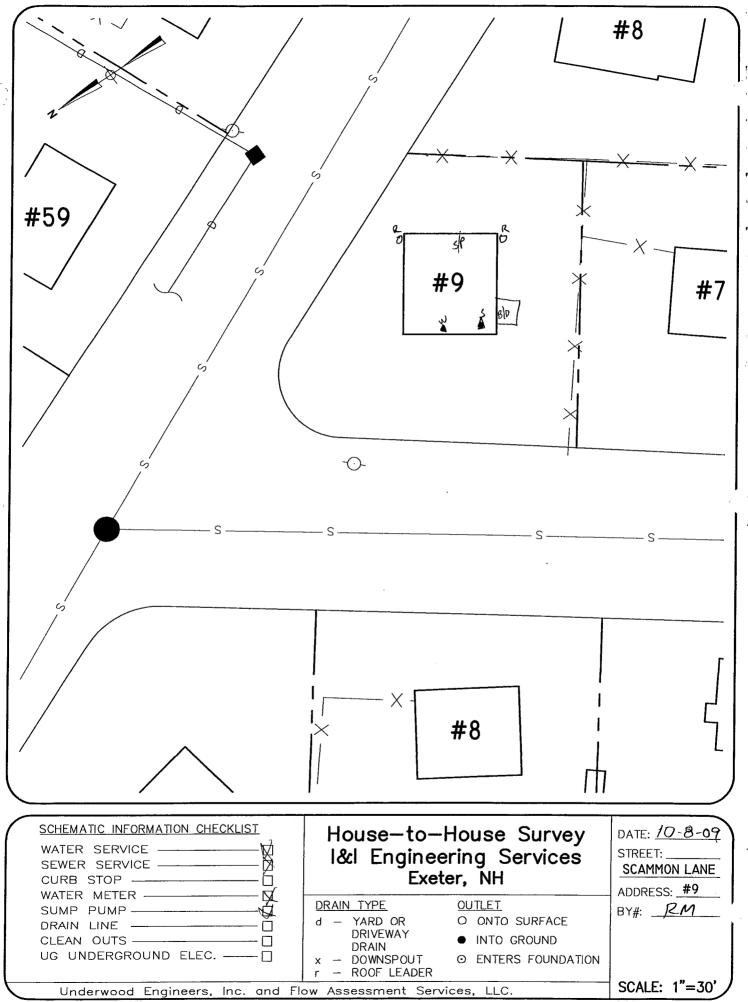

H:\SDSKPROJ\. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/2//2009 4:22:29 PM, rla


/I Enginee ' ter, NH	ring Services				Flow Assessment Services Bedford, NH
ot #	Tax Map #	Sub System	Street # 3 Sivio		nterviewer RST
Multi Ünit Res (🗆 Single Unit Res 🗗	Commercial 🗆 # of Unit	s House Vacant	0	
nitial Visit: Da 2 nd Visit: Da 3rd Visit: Da	tte te	Time: Time: Time:	Unsuccessful, Left Flyer 🛛	Not Admitted 🗆	Other Other Other
Flooded Baser	Sump pump.	ement Clogged Pipe			
Is there a base	ment? Full Basement N	Y Crawl Space □ Slab	Floor Dirt Floor Con	nments:	
Above Floor L Pipe Material:	Level – Distance From In Cast Iron 🗹 PVC	vert to Sill	. <u></u>	rom Floor 🛛	Below Floor Level
If yes, where o	Other	? Sanitary Sewer 🗆 Sepa	Jus Face Back up		
Open Clean O	ut 🛛 Basement Drain [🗆 Open Pipe 🗆 Sump	floor? (indicate if connected Pit □ Recommend Dye Te	st 🛛	
Roof Leader () Flat Roof Drai	RL) Into Foundation in System 🗆 Yard Drai	RL Into C	erved in spaces marked and ind fround RL (n Stair Well Drain E	Dnto Surface	5
Water Service I Cannot Locate Pipe Material:	Information:	el □ Distance from Sill	E	elow Floor Level	
lieral Comment	s:				
IOTE – SEE SKI	ETCH ON BACK				

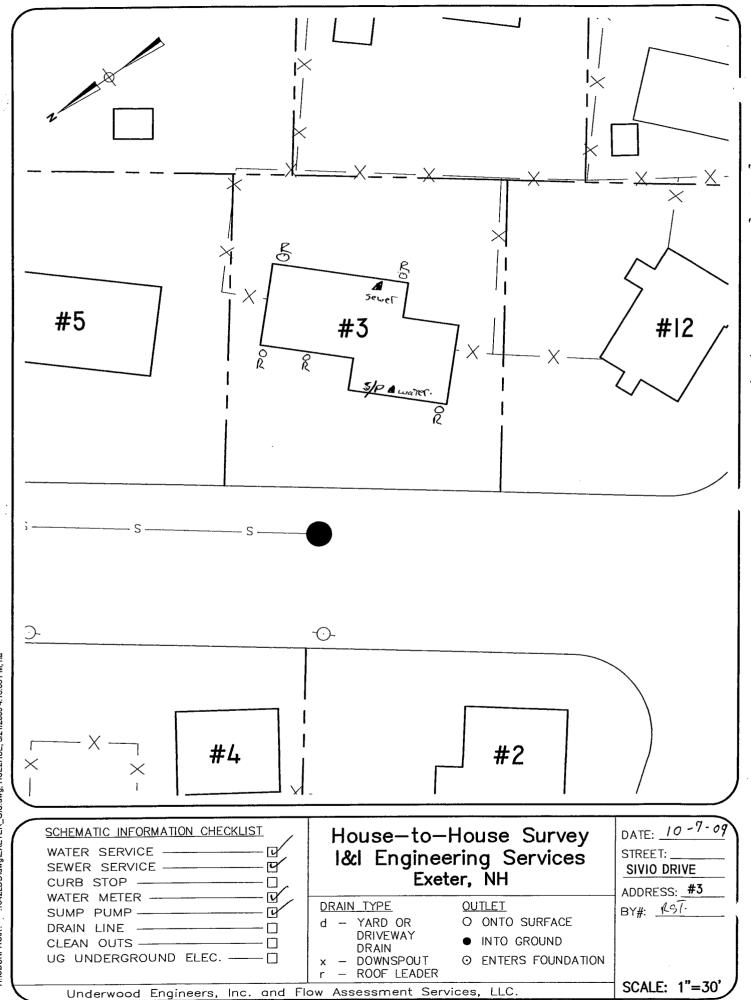

.1542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:18:38 PM, rla


H:\SDSKPROJ\.

/I Engineering S ter, NH	ervices				Flow Assessment Services Bedford, NH
Ta:	с Мар #	Sub System	Street # <u>2 Sivio</u>	<u>. 16</u>	iterviewer <u>RST/RM/Re</u>
`1ulti Unit Res □ Sin	gle Unit Res 🗗	Commercial 🗆 # of Unit	s House Vacant		, 1
nitial Visit: Date <u>/C</u> 2 nd Visit: Date <u>/O</u> [^] rd Visit: Date <u>/C</u> <u>/C</u>	-7-09 -8-09 -12-09 -12-09	Time: <u>1709</u> Time: <u>13:07</u> Time: <u>1129</u>	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted 🛛	Other Other Other
I. Have any of the follow	ving problems oc	curred?			
Flooded Basement 🗆	Sewage in Base	ment 🗆 Clogged Pipe 🗆	Not Known 🛛 Other 🗆		
			Floor 🗆 Dirt Floor 🗆 Cor		
Above Floor Level – D Pipe Material: Cast I	istance From Inv ron 🗆 PVC [vert to Sill		rom Floor 🛛	Below Floor Level 🛛
Unknown 🗆 Other					
Open Clean Out 🗆 B	asement Drain 🗆	Open Pipe 🗆 Sump	floor? (indicate if connected p Pit □ Recommend Dye Te	st 🗆	
Any of the following pr	esent outside the	building (Put quantity obs	served in spaces marked and in	licate if connected	to sewer)
Roof Leader (RL) Into	Foundation	Ø RL Into C	Ground RL (Onto Surface	2
Flat Roof Drain System	n 🗆 Yard Drai	n 🗆 Window Well Drain	n 🗆 Stair Well Drain 🗆 D	riveway Drain 🛛	
Comments:				· · · · · · · · · · · · · · · · · · ·	```
Water Service Informati Cannot Locate A		Distance from Sill	E	elow Floor Level	Π
					_
uteral Comments: <u>SA</u>	YS BASEMI	ENT HAS TO M	UCH CLUTTER ! O	easied ac	cess by owner
IOTE – SEE SKETCH O	N BACK				4

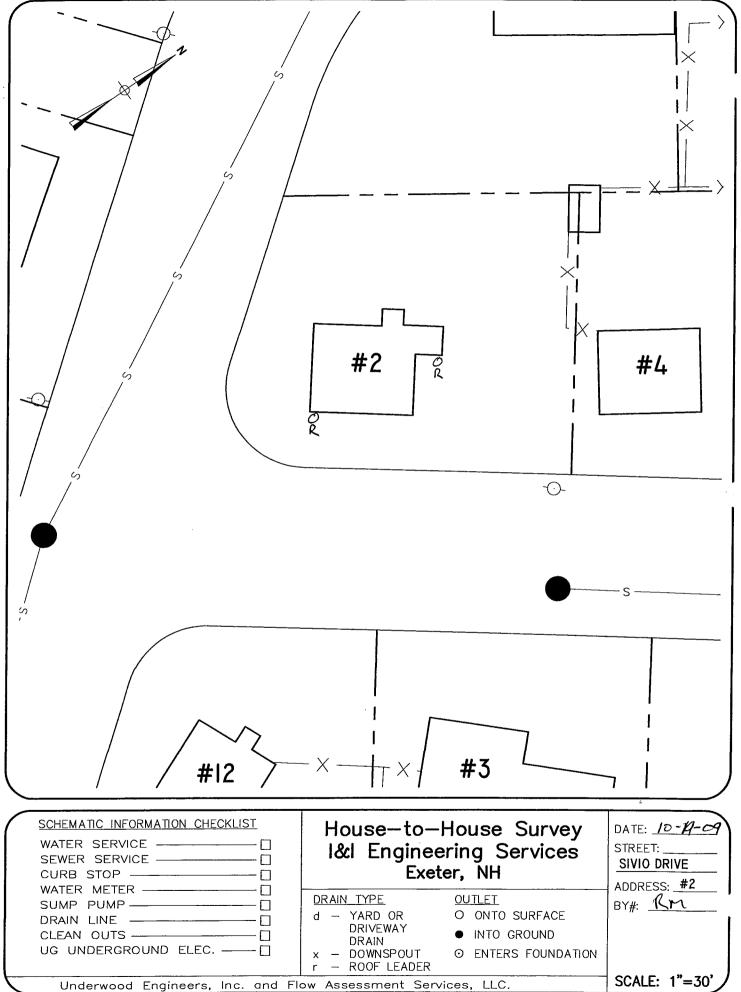

H:\SDSKPROJV 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:59:43 PM, rla


I/I Engineer Fxeter, NH	ing Services				Flow Assessment Services Bedford, NH
					erviewer <u>RS</u> T
			ts House Vacan		
Initial Visit: Date 2 nd Visit: Date 3rd Visit: Date	e	Time: Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Not Admitted Not Admitted Not Admitted	Other Other Other
Flooded Basen		ment 🗆 Clogged Pipe 🗆		······	
2. Is there a baser	nent? Full Basement	Crawl Space 🗆 Slat	⊃Floor □ Dirt Floor □ Co	mments:	
Above Floor La Pipe Material: Comments:	evel – Distance From Inv Cast Iron 🗹 PVC (vert to Sill		From Floor 🛛	Below Floor Level
If yes, where d Unknown 🗹	Other	Sanitary Sewer 🗆 Sep	e Shy Face Level, The o		in Back Yard.
5. Are the follow: Open Clean O	ing present in the basement Drain [ent to collect water from th	ne floor? (indicate if connecte np Pit 🕑 Recommend Dye '	d to sewer) Γest □	
Roof Leader (I Flat Roof Drai	RL) Into Foundation in System 🗆 Yard Dra	RL Into	bserved in spaces marked and i Ground RI in D Stair Well Drain D	. Onto Surface Driveway Drain 🗆	
 Water Service Cannot Locate Pipe Material: 	Above Floor Leve			Below Floor Level Comments:	t /
<u> </u>	<u></u>		·····	<u></u>	
NOTE – SEE SK	ETCH ON BACK				
		્યત			

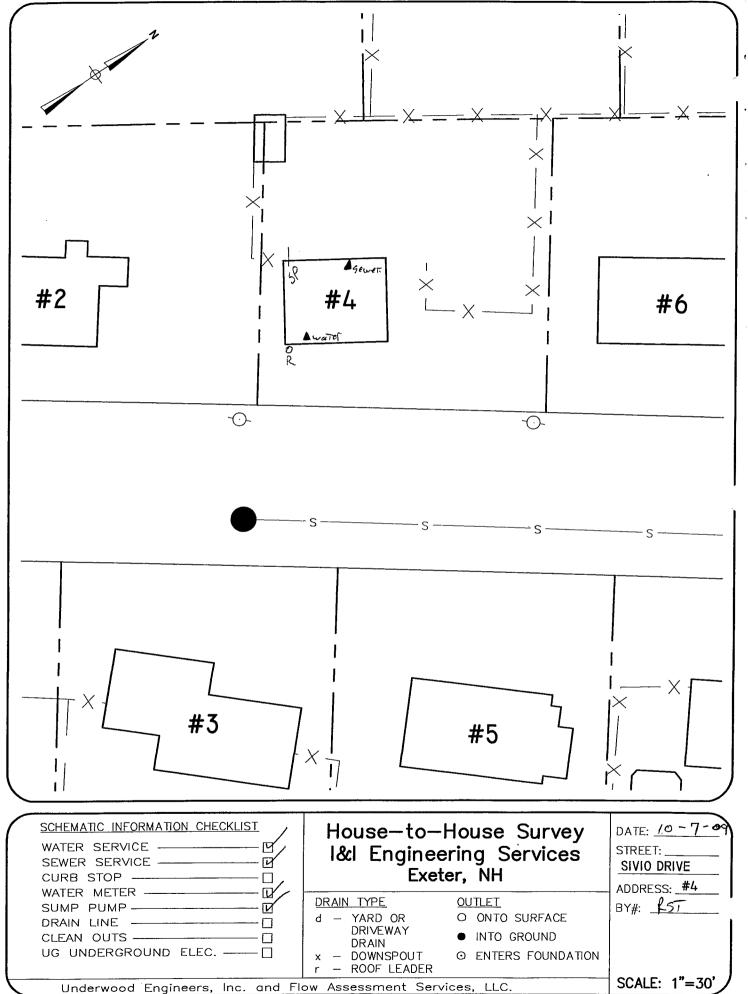

H:\SDSKPROJ\ 1542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/21/2009 3:57:49 PM, rla


.

Freter, NH	ing Services						Assessment Services ord, NH
Lot #	Tax Map #	Sub System	Street # _	Ssivio		nterviewer	RST/RM/RS
Multi Unit Res 🗆	Single Unit Res 🗗 🕻	Commercial 🗆 # of Units	He	ouse Vacant	٥		/
Initial Visit: Date 2 nd Visit: Date 3rd Visit: Date	10-7-09 10-8-09 10-12-09	Time: <u>1648</u> Time: <u>14-20</u> Time: <u>1121</u>	Unsuccessful, Le <u>Unsuccessful, L</u> e Unsuccessful	ft Flyer 🗆 ft Flyer 🗆	Not Admitted □	Other	
1. Have any of the	following problems occu	rred?					
		ent 🗆 Clogged Pipe 🗆					
		Crawl Space 🗆 Slab F					
3. Sewer Invert Inf Above Floor Lev Pipe Material:	formation? Cannot Loca vel – Distance From Inver Cast Iron 🗆 PVC 🗆	te 🛛 Distance From Base	ement Floor to Si	Distance Fr	om Floor 🛛	Below	v Floor Level 🛛
If yes, where doo Unknown 🗆 O	Other	anitary Sewer 🗆 Separa					
Open Clean Out	Basement Drain	to collect water from the fl Open Pipe □ Sump F	rit □ Recomm	nend Dye Te	st 🗆		
Roof Leader (RI Flat Roof Drain	L) Into Foundation System D Yard Drain [uilding (Put quantity obser	ound	RL C	onto Surface g riveway Drain 🗆	5	
Water Service Int Cannot Locate D Pipe Material:	Above Floor Level	Distance from Sill			elow Floor Leve Comments:		

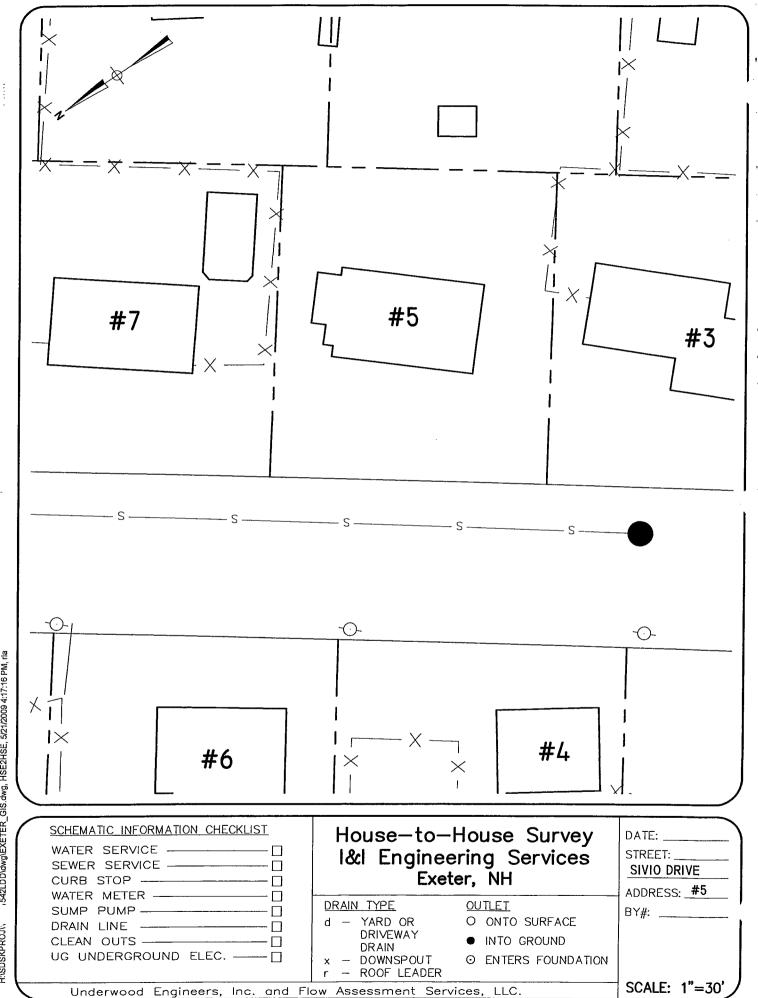

H:\SDSKPROJV


I Engineering Services	Flow Assessment Services Bedford, NH
t # Tax Map # Sub System Street # Street #Street #St	_Interviewer_RST/RM
Multi Unit Res 🛛 Single Unit Res 🖓 Commercial 🗆 # of Units House Vacant 🗆	
2^{nd} Visit: Date $10-8-09$ Time: $19:11$ Unsuccessful, Left Flyer D Not Admitte	d □ Other d □ Other ed □ Other
1. Have any of the following problems occurred?	
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments:	
. Is there a basement? Full Basement Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	ZINNISHED
. Sewer Invert Information? Cannot Locate \Box Distance From Basement Floor to Sill \underline{S}	
Above Floor Level – Distance From Invert to Sill 🛛 Unknown Distance From Floor 🗆	
Pipe Material: Cast Iron D PVC Clay D Other	· · ·
Comments:	
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Cannot Loc	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
. Any of the following present outside the building (Put quantity observed in spaces marked and indicate if conn	ected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	2
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗅 Stair Well Drain 🗅 Driveway Drai	in 🛙
Comments:	
Water Ormin Information	
. Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor L	evel X
Pipe Material: Copper 🛛 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments:	
eral Comments:	
NOTE – SEE SKETCH ON BACK	

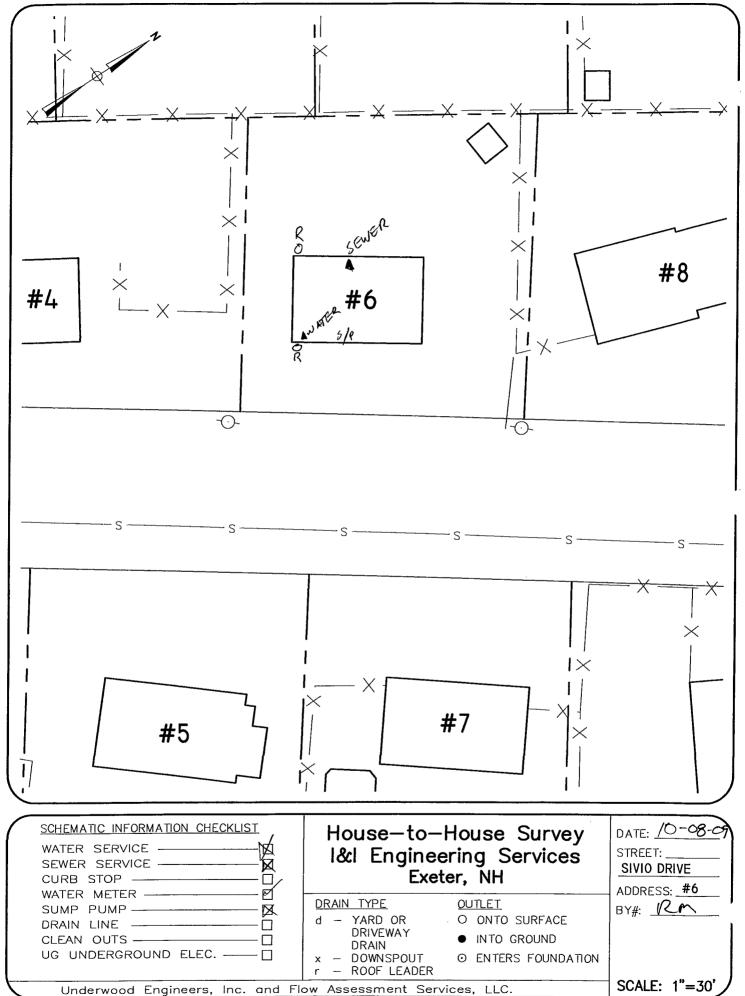

.1542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:55:57 PM, rla

H:\SDSKPROJV.


1/I Engineering Services F≺eter, NH	Flow Assessment Services Bedford, NH
	Stuto Dr. Interviewer 7297
Multi Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units House V	Vacant 🗆
nitial Visit: Date <u>10-7-09</u> Time: <u>1638</u> Unsuccessful, Left Flyd 2 nd Visit: Date <u>Time:</u> Unsuccessful, Left Flyd 3rd Visit: Date <u>Time:</u> Unsuccessful	er Not Admitted Other Not Admitted Other Not Admitted Other Not Admitted Other
I. Have any of the following problems occurred? Flooded Basement I Sewage in Basement □ Clogged Pipe □ Not Known □ Other Comments: <u>Sump pump Takes</u> Care of iTe	
2. Is there a basement? Full Basement IV Crawl Space Slab Floor Dirt Floor	
 Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	ance From Floor D Below Floor Level
s there a Sump Pump? Yes No D If yes, where does the pump discharge? Sanitary Sewer D Separate Pipe Out D Surfa Unknown D Other Comments:	
5. Are the following present in the basement to collect water from the floor? (indicate if common open Clean Out Basement Drain Open Pipe Sump Pit Recommend I Comments:	Dye Test 🗆
Any of the following present outside the building (Put quantity observed in spaces marked a Roof Leader (RL) Into Foundation RL Into Ground Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Comments:	RL Onto Surface
. Water Service Information: Cannot Locate Above Floor Level Distance from Sill Pipe Material: Copper Plastic Iron Lead Other	Below Floor Level
eral Comments:	
NOTE – SEE SKETCH ON BACK	

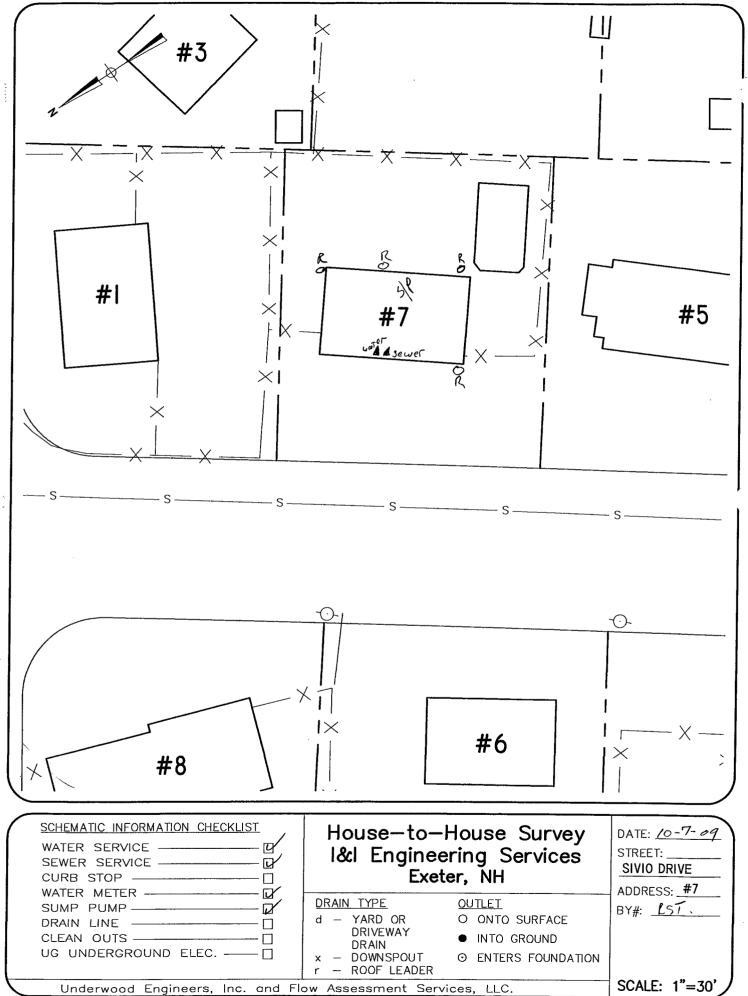

,542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:14:45 PM, rla

H:\SDSKPROJ\.


/I Engineering Services							Flow Assessment Services Bedford, NH			
_ot # Ta:	x Map #	Sub System	Street # _	8 5.	luio D.	<u> </u>	terviewer_	PPC	RT	
Aulti Unit Res 🗆 🛛 Sin	gle Unit Res	Commercial □ # of Uni	its H	ouse Vacar	nt 🗆					
nitial Visit: Date <u>/0</u> nd Visit: Date rd Visit: Date	-6-09	Time: <u>/0.56</u> Time: Time:	Unsuccessful, Le Unsuccessful, Le Unsuccessful	aft Flyer □ aft Flyer □	Not Adn Not Adn Not Adr	nitted 🗆 nitted 🗆 nitted 🗆	Other Other Other			
. Have any of the follow	ving problems o	ccurred?								
Flooded Basement	Sewage in Ba	sement 🗆 Clogged Pipe 🗆] Not Known 🗆	Other 🗆 _						
Comments:						····				
			·							
. Sewer Invert Informati	on? Cannot L	ocate 🗆 Distance From I							/	
Above Floor Level – D	istance From II	vert to Sill 🗆	Unknow	n Distance	From Floor		Below	Floor Le	vel 🕅	
Pipe Material: Cast I	íron 🔊 PVC	□ Clay □ Other								
	•									
· · · · · · · _ · _									<u> </u>	
s there a Sump Pump?	1		, 		1 ~	_				
		? Sanitary Sewer 🗆 Sep			Cannot	Locate []			
		·····					<u> </u>			
Comments: <u>Sink</u>	Located]	Directly above Su	mp tump							
Are the following press Open Clean Out	ent in the basem Basement Drain	eent to collect water from th □ Open Pipe □ Sun	ne floor? (indicate i up Pit A Recomm	f connecte nend Dye	d to sewer) Γest □	•				
Comments: <u>2</u> " op	en Pipe	e sill level D	irectly above	Sum	p Pur	P	<u> </u>			
Any of the following p	resent outside th	ne building (Put quantity of	bserved in spaces m	arked and i	ndicate if c	onnected	l to sewer)			
		RL Into	-							
		nin 🗆 Window Well Dra								
						•				
Water Service Informat Cannot Locate D A	ion: bove Floor Lev	el □ Distance from Sill			Below Flo	or Level	⊠1			
		□ Iron □ Lead □					·			
<u> </u>	/	······································			······			<u></u>		
ieral Comments: Home	· Owner	what's to Pipe by in Stairmell	S.P into (atzn	Basin	in	street.	Curres	∩tly	
We Sump Rumps	on sland	by in Stairmell	Bitable. Lo	t Cunn	ected e	the	time		¥	
OTE – SEE SKETCH O										

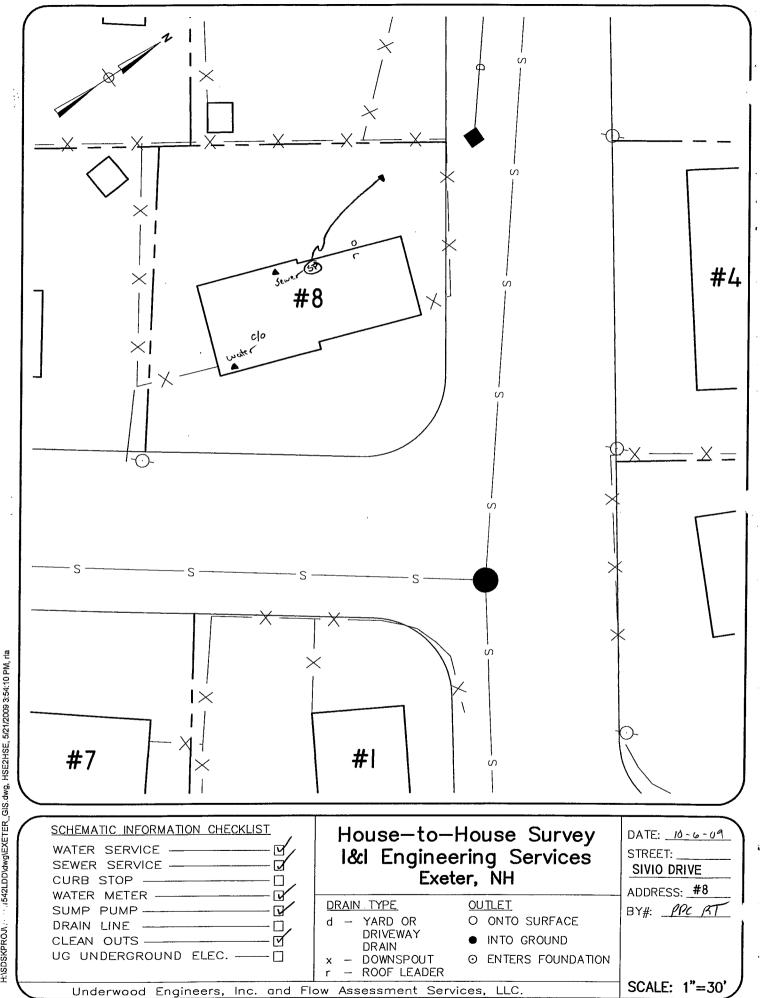

··· .1542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:54:10 PM,


H:\SDSKPROJ\;-

[Engineering Services reter, NH	Flow Assessment Services Bedford, NH
t # Tax Map # Sub System Street # _ / TiLTON A	WE Interviewer <u>RST/RM/RST</u>
ılti Unit Res □ Single Unit Res 🛛 Commercial □ # of Units House Vacant □	1
Visit: Date 10-8-09 Time: 14:59 Unsuccessful, Left Flyer Dot Ad	dmitted □ Other dmitted □ Other dmitted □ Other
Have any of the following problems occurred?	
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments:	
s there a basement? Full Basement 🕅 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
Sewer Invert Information? Cannot Locate \Box Distance From Basement Floor to Sill <u>$82''$</u>	N /
Above Floor Level – Distance From Invert to Sill Unknown Distance From Flo	
ipe Material: Cast Iron 🖗 PVC 🗆 Clay 🗆 Other	
Comments:	
s there a Sump Pump? Yes X No □ f yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface X Canno Jnknown □ Other Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewe Dpen Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
any of the following present outside the building (Put quantity observed in spaces marked and indicate it	f connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Su	urface <u>3</u>
,	y Drain 🗆
Comments:	
Vater Service Information:	
	loor Level
ipe Material: Copper Plastic 🗆 Iron 🗆 Lead 🗆 OtherComme	
fral Comments:	
TE – SEE SKETCH ON BACK	

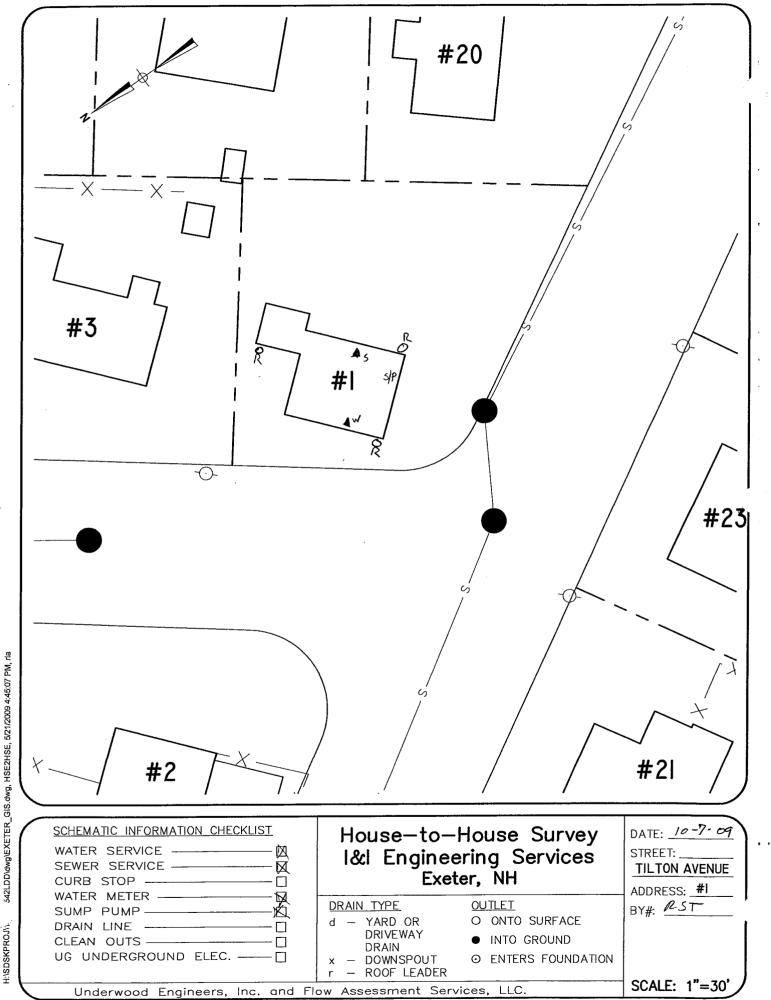


542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:45:07 PM, ria

I/I Enginee	ering Services [Flow Assessment Service Bedford, NH
Lot #	Tax Map #	Sub System	Street # $2 \tau_i^2$	TON AVE IT	terviewer <u>RST</u>
Multi Unit Res	Single Unit Res I	Commercial D # of Units	House Vacan	t 🛛	
Initial Visit: Da 2 nd Visit: Da 3rd Visit: Da	ate <u>10 - 7 - 09</u> ate	Time:	Unsuccessful, Left Flyer D Unsuccessful, Left Flyer D Unsuccessful	Not Admitted 🛛	Other Other Other
. Have any of t	the following problems o	ccurred?			
Flooded Base	ment 🛛 Sewage in Bas	ement 🛛 Clogged Pipe 🗆	Not Known 🛛 Other 🗆		
Comments:	Sump pump	. Talkes Care of	17.		
. Is there a base	ement? Full Basement	Crawl Space Stab I	Floor [] Dirt Floor [] Co	imments:	
. Sewer Invert I	Information? Cannot L	ocate 🛛 Distance From Ba	sement Floor to Sill \mathcal{B}	6"	
					Below Floor Level
Pipe Material:	Cast Iron 🗹 PVC	Clay Other		· · ·	
Comments:				······································	
Unknown 🛛	Other				
			floor? (indicate if connected Pit Recommend Dye T		
Comments:					
Any of the foll	lowing present outside th	e building (Put quantity obse	erved in spaces marked and ir	ndicate if connected	to sewer)
Roof Leader ((RL) Into Foundation	Ø RL Into G	round RL	Onto Surface <u>(</u>	¥
		in 🗆 Window Well Drain		∕ Driveway Drain □	
Comments:				· ·	
		·····	·		······
Water Service Cannot Locate	Information:	el 🗆 Distance from Sill		Below Floor Level	
Pipe Material:				Comments:	
rieral Comment	ts:				
IUTE – SEE SK	ETCH ON BACK				

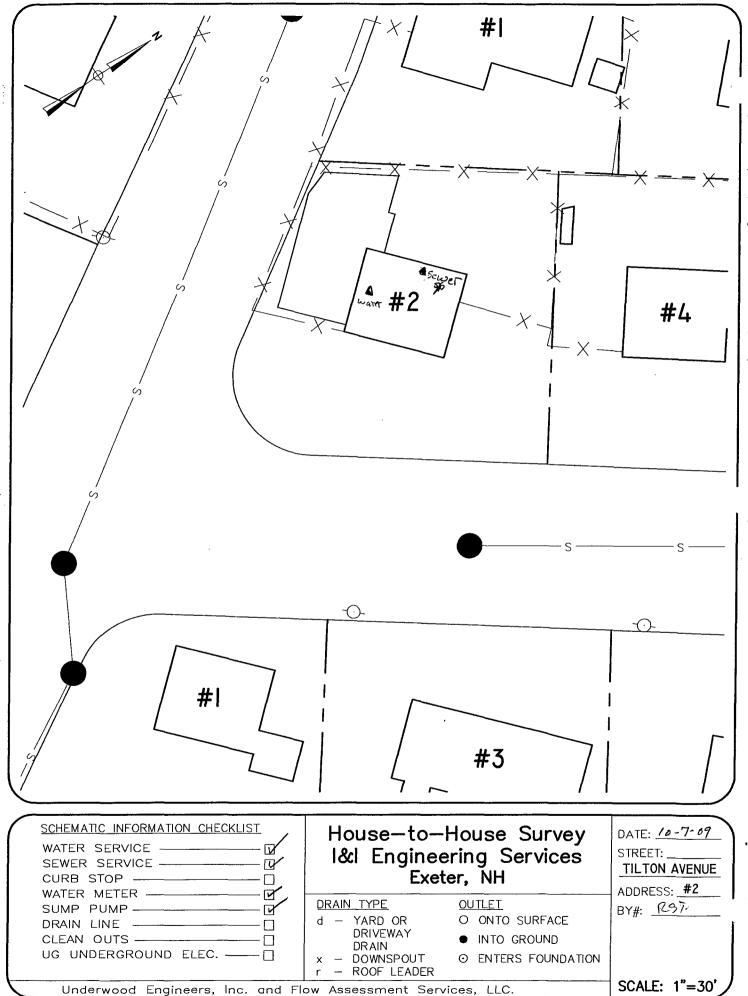


H:\SDSKPROJV. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:27:57 PM, rla

/I Engineering Services	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub System Street # 3 Tilton A	NE Interviewer 化ST
Multi Unit Res 🛛 Single Unit Res 🕼 Commercial 🗆 # of Units House Vacant 🗆	
itial Visit: Date $10 - 7 - 09$ Time: $/738$ Unsuccessful, Left Flyer \Box Not 2^{nd} Visit: DateTime:Time:Unsuccessful, Left Flyer \Box Not $3rd$ Visit: DateTime:UnsuccessfulNot	Admitted Other Admitted Other Admitted Other
1. Have any of the following problems occurred?	
Flooded Basement 🛛 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: <u>use portable sump</u>	
. Is there a basement? Full Basement 🗗 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comment	ts:
. Sewer Invert Information? Cannot Locate \Box Distance From Basement Floor to Sill \mathscr{BB}'	1
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From F	Floor 🛛 🛛 Below Floor Level 🖬 🛶
Pipe Material: Cast Iron 🗗 PVC 🗆 Clay 🗆 Other	
Comments:	
, there a Sump Pump? Yes V No 🗆	
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface 🕑 Can	not Locate 🗆
Unknown 🛛 Other	
Comments: portable surp 70 surface out Back Bulkhead.	
5. Are the following present in the basement to collect water from the floor? (indicate if connected to sew Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	
Comments: <u>Capped Clean out</u>	
. Any of the following present outside the building (Put quantity observed in spaces marked and indicate	if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto S	Surface
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Drivew	vay Drain 🗆
Comments:	
Water Service Information:	Floor Level
Pipe Material: Copper P Plastic Iron Lead Other Comm	
éral Comments:	
NOTE – SEE SKETCH ON BACK	

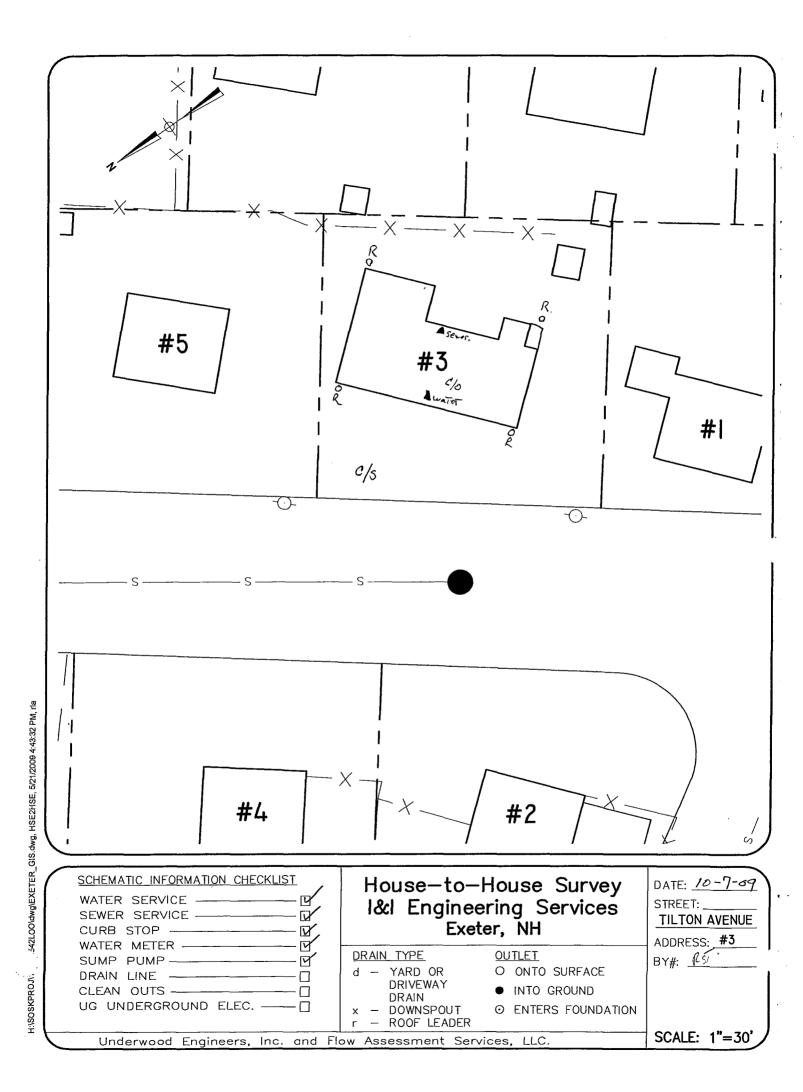


					Bedford, NH
_ot #	Tax Map #	Sub System	Street # 7/27	on AVE In	terviewer <u> </u>
viulti Unit Res [] Single Unit Res 🗗	Commercial 🗆 # of Unit	ts House Vacan		
rd Visit: Dat	e 10-12-09	Time: 1056	Unsuccessful	Not Admitted	Other Other Other
. Have any of th	e following problems o	occurred?			
Flooded Basen	nent 🗆 Sewage in Bas	sement 🗆 Clogged Pipe 🗆	Not Known 🛛 Other 🗆		
Comments:					
. Is there a baser				nments:	
. Sewer Invert Ir	nformation? Cannot L	ocate 🗆 Distance From B	asement Floor to SillE	/ ''	
Above Floor L	evel – Distance From In	nvert to Sill 🗆	Unknown Distance I	rom Floor 🛛	Below Floor Level
	,				
Unknown 🗆	Other			•	
Open Clean Ou	it 🗆 Basement Drain	🗙 Open Pipe 🗆 Sumj	e floor? (indicate if connected p Pit Recommend Dye T	est 🗆	
Open Clean Ou Comments:	It 🗆 Basement Drain	A Open Pipe 🗆 Sum	p Pit 🗆 Recommend Dye T	est 🗆	
Open Clean Ou Comments: Any of the follo	ut 🗆 Basement Drain	A Open Pipe □ Sum he building (Put quantity ob	p Pit □ Recommend Dye T	dicate if connected	to sewer)
Open Clean Ou Comments: Any of the follo Roof Leader (F	t Basement Drain Basement Drain Dra	A Open Pipe □ Sump	p Pit Recommend Dye T Recommend Dye T	dicate if connected	to sewer)
Open Clean Ou Comments: Any of the follo Roof Leader (F Flat Roof Drain	at Basement Drain Basement Drain Basement Drain Drain Drain Drain Drain System System Yard Drain	▲ Open Pipe □ Sump he building (Put quantity observed) ▲ ② RL Into Open Pipe □ Sump	p Pit Recommend Dye T Recommend Dye T Recommend Dye T Recommend Dye T RL	dicate if connected	to sewer)
Open Clean Ou Comments: Any of the follo Roof Leader (F Flat Roof Drain Comments:	at Basement Drain Basement Drain Basement Drain Drain Basement Drain Dr	▲ Open Pipe □ Sump he building (Put quantity observed) ▲ ② RL Into Open Pipe □ Sump	p Pit Recommend Dye T served in spaces marked and in Ground RL n Stair Well Drain I	dicate if connected	to sewer)
Open Clean Ou Comments: Any of the follo Roof Leader (F Flat Roof Drain Comments: Water Service I	at Basement Drain Basement Drain Basement Drain Dowing present outside the second sec	Open Pipe Sump te building (Put quantity ob-	p Pit Recommend Dye T Served in spaces marked and in Ground RL n Stair Well Drain I	dicate if connected	to sewer)
Open Clean Ou Comments: Any of the follo Roof Leader (F Flat Roof Drain Comments: Water Service I Cannot Locate I	at Basement Drain Basement Drain Basement Drain Basement Drain Drain Basement Drain Drain Basement Drain Basem	Open Pipe Sump be building (Put quantity obs C RL Into C in Window Well Drain el Distance from Sill	p Pit Recommend Dye T Served in spaces marked and in Ground RL n Stair Well Drain I	dicate if connected Onto Surface Oriveway Drain [] Below Floor Level	to sewer)
Open Clean Ou Comments: Any of the follo Roof Leader (F Flat Roof Drain Comments: Water Service I Cannot Locate I Pipe Material:	at D Basement Drain powing present outside the RL) Into Foundation In System D Yard Dra Information: Above Floor Lev Copper X Plastic	Open Pipe Sump be building (Put quantity obs Comparing RL Into Comparing Window Well Drain el Distance from Sill Iron Lead Comparing Comp	p Pit Recommend Dye T Served in spaces marked and in Ground RL n Stair Well Drain Dther	dicate if connected Onto Surface Oriveway Drain [] Below Floor Level Comments:	to sewer)

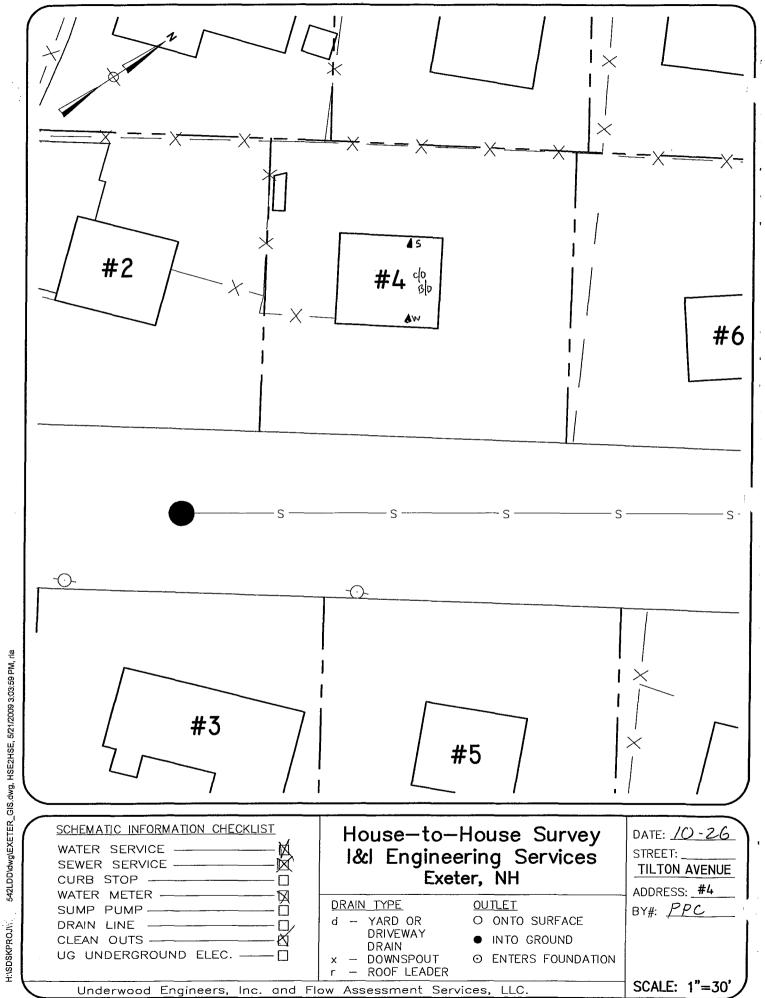

642LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 3:03:59 PM, ria


I/I Engineer Fxeter, NH	ring Services				Flow Assessment Services Bedford, NH
Lot #	Tax Map #	Sub System	Street # <u>5 7,L</u>	TON AVE Int	erviewer (ST
Multi Unit Res [🗆 Single Unit Res 🗗	Commercial # of Units	House Vacan	t 🛙	
Initial Visit: Dat 2 nd Visit: Dat 3rd Visit: Dat	te <u>10 - 7 - 09</u> te	Time: Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Not Admitted Not Admitted Not Admitted	Other Other Other
l. Have any of th	he following problems occ	urred?			
2. Is there a base	ement? Full Basement				
Above Floor L Pipe Material:	Level – Distance From Inve Cast Iron D PVC D	ert to Sill Clay Other		From Floor 🛛	Below Floor Level
If yes, where a Unknown □	Other	Sanitary Sewer 🗹 Sepa	arate Pipe Out 🗆 Surface 🗆	····=.	
Open Clean O	Dut 😰 Basement Drain 🗆	Open Pipe 🗆 Sump	e floor? (indicate if connected Pit P Recommend Dye and is Stated	Test 🗆	
Roof Leader (Flat Roof Dra	(RL) Into Foundation	Ø RL Into O n □ Window Well Drain	served in spaces marked and i Ground RI n □ Stair Well Drain □	. Onto Surface Driveway Drain 🗆	<i>b</i>
. Water Service Cannot Locate Pipe Material:	e 🗆 Above Floor Level			Below Floor LevelComments:	
ieral Commen	its:	· · · · · · · · · · · · · · · · · · ·			
NOTE – SEE SH	KETCH ON BACK				

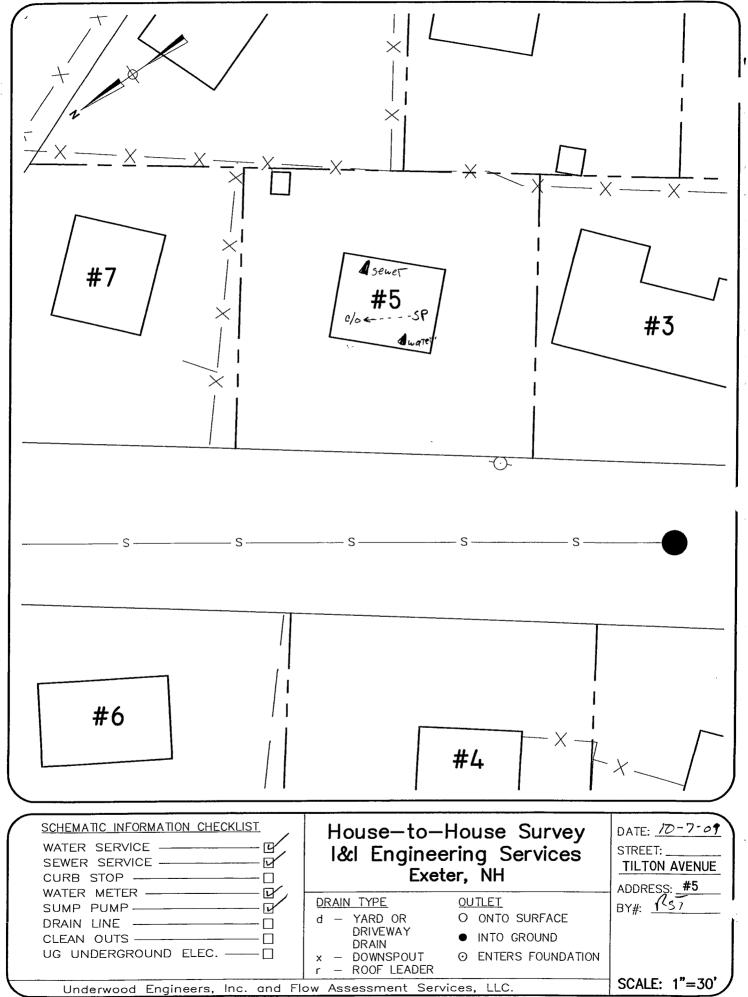

342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:42:20 PM, rla


H:\SDSKPROJ\1

/I Engineering Services	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub System Street #_ 6 TiLTON AU	E Interviewer <u>RST/RM/RST/R</u>
Multi Unit Res 🛛 Single Unit Res 🕑 Commercial 🗆 # of Units House Vacant 🗆	
nitial Visit:Date $10 - 7 \cdot o 9$ Time: 1755 Unsuccessful, Left Flyer INot Adn 2^{nd} Visit:Date $10 - 8 \cdot 0 9$ Time: $13 \cdot 0 0$ Unsuccessful, Left Flyer INot Adn 3^{rd} Visit:Date $10 - 12 - 0 9$ Time: 1058 UnsuccessfulNot Adn $10 - 21 - 0 9$ $12 \cdot 35$ $12 \cdot 35$ UnsuccessfulNot Adn	nitted Other
1. Have any of the following problems occurred?	
Flooded Basement 🛛 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: When Basement Floods owner uses portable sump	1 to sufface.
. Is there a basement? Full Basement 🕅 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
Sewer Invert Information? Cannot Locate 🗆 Distance From Basement Floor to Sill 🖉/''	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Floor	r 🗆 🛛 Below Floor Level 🕅
Pipe Material: Cast Iron 🕅 PVC 🗆 Clay 🗆 Other	
Comments:	
s there a Sump Pump? Yes V No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface V Cannot	,
Unknown 🗆 Other	
Comments: portable sump is used no pit-	
5. Are the following present in the basement to collect water from the floor? (indicate if connected to sewer)	
Open Clean Out □ Basement Drain 🕅 / Open Pipe □ Sump Pit □ Recommend Dye Test □	
Comments:	······
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if c	connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surf	iace O
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Driveway I	Drain 🗆
Comments:	
7. Water Service Information:	
Cannot Locate Above Floor Level Distance from Sill Below Floor	
Pipe Material: Copper Plastic I Iron Lead Other Comment	ts:
ineral Comments:	
IOTE – SEE SKETCH ON BACK	

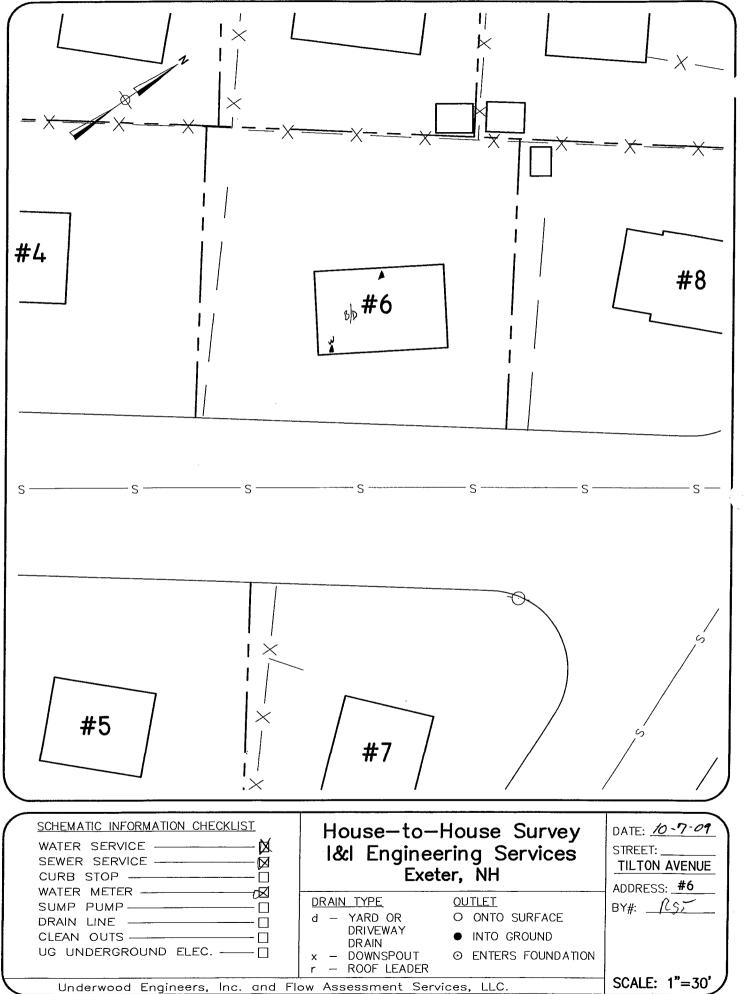


H:\SDSKPROJ\. 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:38:04 PM, rla

[/I Engineering Server] Ther, NH	vices					Flow Assessment Servic Bedford, NH
.ot # Tax M	[ap # 5	Sub System	Street #	7 TILIO	N AVE	Interviewer <u>RST</u>
Multi Unit Res 🛛 🛛 Single	Unit Res Commer	rcial □ # of Unit	s Ho	ouse Vacant		
nitial Visit: Date <u>/0-</u> 7 2 nd Visit: Date 3rd Visit: Date	7-69 Time: Time: Time:	1807	Unsuccessful, Le: Unsuccessful, Le: Unsuccessful	ft Flyer □ ft Flyer □	Not Admitted [Not Admitted [Not Admitted	Other Other Other Other
l. Have any of the following	g problems occurred?					
Flooded Basement 🗹 Se	wage in Basement 🗆	Clogged Pipe 🗆	Not Known 🗆 🛛	Other 🛛		
Comments: <u>used</u>	portable Sur	np TO Jui	Face			
. Is there a basement? Full	Basement D Crawl	Space 🗆 Slab	Floor 🗆 Dirt Flo	oor 🗆 Con	iments:	
. Sewer Invert Information?	? Cannot Locate 🗆 🗎	Distance From Ba	asement Floor to Si	11 81	11	······································
Above Floor Level – Dista	ance From Invert to Sill	•	Unknown	Distance Fi	rom Floor 🛛	Below Floor Level
Pipe Material: Cast Iron	PVC 🗆 Clay	□ Other				
Comments:						
·						
∴s there a Sump Pump? Y				¥ /		
If yes, where does the pun	np discharge? Sanitary	Sewer 🗆 Sepa	urate Pipe Out 🗆	Surface	Cannot Locate	
Unknown 🛛 Other						
Comments: <u>UGes</u>	portable 54	imp 70 34	Face per	Oure	<u> </u>	
Are the following present Open Clean Out Base	ement Drain 🗹 Open	Pipe 🗆 Sump	Pit 🗆 Recomm	iend Dye Te	st 🛛	
Comments: <u>Been</u>	Jergg va					
Any of the following prese			-			
Roof Leader (RL) Into Fo	undation	RL Into C	Fround	RL C	Onto Surface	<u>p</u>
Flat Roof Drain System 🗆	Yard Drain 🗆 W	indow Well Drain	n 🗆 Stair Well Di	rain 🗆 D	riveway Drain []
Comments:						
Water Service Information:					·····	<u> </u>
Cannot Locate Aboy	ze Floor Level □ Distan	ce from Sill	·····	B	elow Floor Leve	el II
Pipe Material: Copper 19	Plastic 🗆 Iron	🗆 Lead 🗆 C	Other	(Comments:	
aleral Comments:						
IOTE – SEE SKETCH ON F	3ACK					

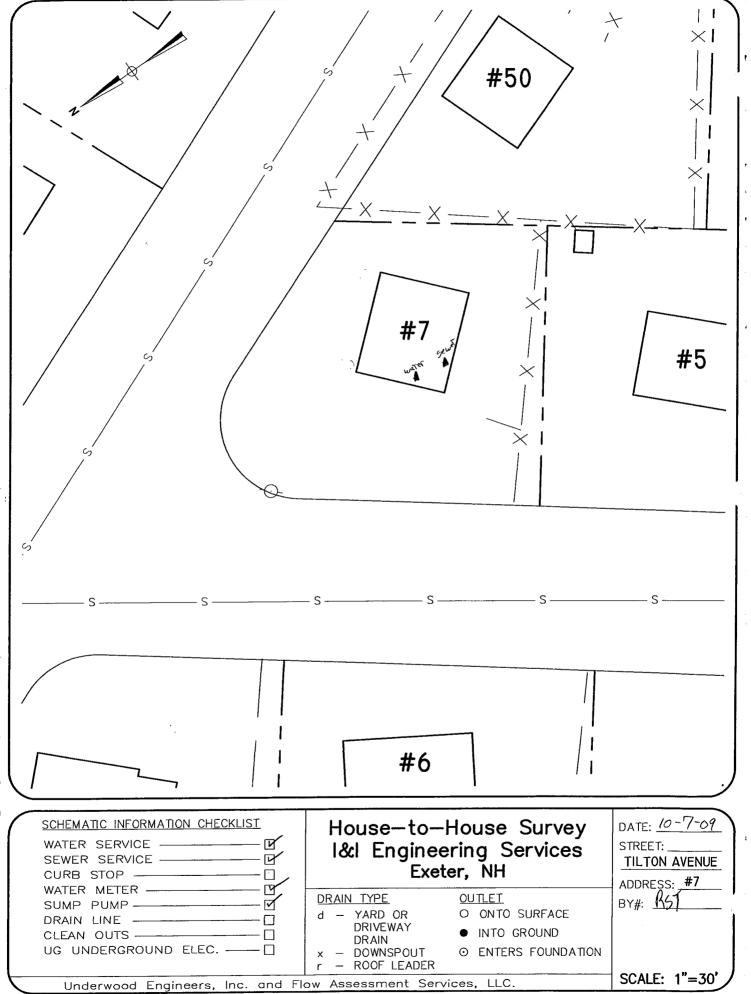

H:\SDSKPRDJ\. 542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/2//2009 4:40:56 PM, rla


I Engineering Services `ter, NH	_	· · ·	Flow Assessment Services Bedford, NH
»t # Tax Map #	Sub System	Street # 8 ק'גדס	N Interviewer RST
Multi Unit Res 🗆 🛛 Single Unit Res 🖻	Commercial 🗆 # of Uni	its House Vacant	
itial Visit: Date <u>10 - 7 - 09</u> 2 ⁻⁴ Visit: Date 3rd Visit: Date	Time: <u>/758</u> Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
_	sement 🗆 Clogged Pipe 🗆		
Is there a basement? Full Basement			nments:
Pipe Material: Cast Iron 🗗 PVC	nvert to Sill —	Unknown Distance F	rom Floor Below Floor Level
S there a Sump Pump? Yes I No If yes, where does the pump discharge Unknown □ Other Comments: Sump_ pump.	? Sanitary Sewer 🗹 Sep	- · ·	Cannot Locate [] F. /winter it gots to sanitary.
Are the following present in the basen Open Clean Out D Basement Drain	nent to collect water from th	e floor? (indicate if connected p Pit P Recommend Dye Te	to sewer)
	RL Into	Ground RL (·
Water Service Information: Cannot Locate D Above Floor Lev	el □ Distance from Sill	E	Below Floor Level Comments:
eral Comments:			
NOTE – SEE SKETCH ON BACK			

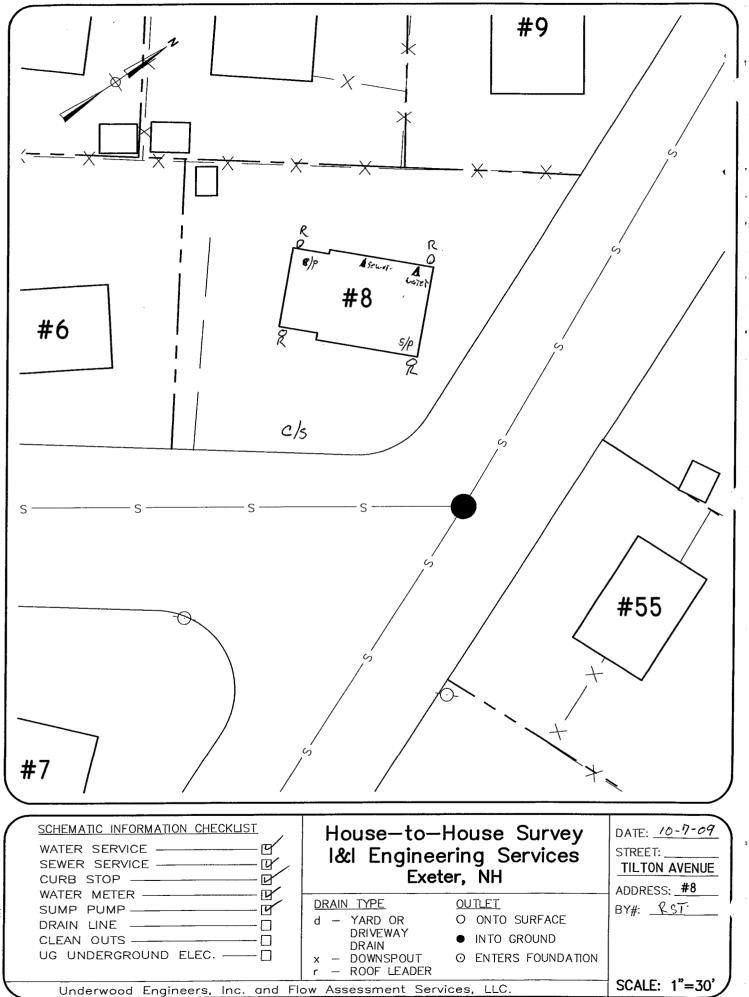

H:\SDSKPROJ\ 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:36:14 PM, rla

I Engineering Services eter, NH	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub System Street # 3 wests de DN	Interviewer <u><i>RS</i></u>
Multi Unit Res 🛛 Single Unit Res 🛛 Commercial 🗆 # of Units House Vacant 🗆	
uitial Visit: Date 10-7-09 Time: 1532 Unsuccessful, Left Flyer I Not Admittee uitial Visit: Date Ime: Ime: Unsuccessful, Left Flyer I Not Admittee uitial Visit: Date Ime: Ime: Unsuccessful, Left Flyer I Not Admittee uitial Visit: Date Ime: Ime: Unsuccessful, Left Flyer I Not Admittee uitial Visit: Date Ime: Ime: Unsuccessful Not Admittee	Contraction Other Contraction Other Contraction Other
. Have any of the following problems occurred?	
Flooded Basement 🛛 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: Sump punp	
. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
. Sewer Invert Information? Cannot Locate \Box Distance From Basement Floor to Sill $\underline{\mathcal{GG}}^{\prime\prime}$	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Floor	
Pipe Material: Cast Iron D PVC C Clay Other	
Comments:	
, there a Sump Pump? Yes 🗹 No 🗆	
If yes, where does the pump discharge? Sanitary Sewer 🗹 Separate Pipe Out 🗆 Surface 🗆 Cannot Loo	cate 🗆
Unknown Other	
Comments: Sunp Goes into washer hook up to sanitary. (Black Flex host	<u>e)</u>
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	
Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if conr	nected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	6
Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Dra	in 🗆
Comments:	
Water Service Information: Cannot Locate Above Floor Level Distance from Sill 75" Below Floor I	Level 🗆
Pipe Material: Copper 🗹 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments:	
cral Comments:	


NOTE – SEE SKETCH ON BACK

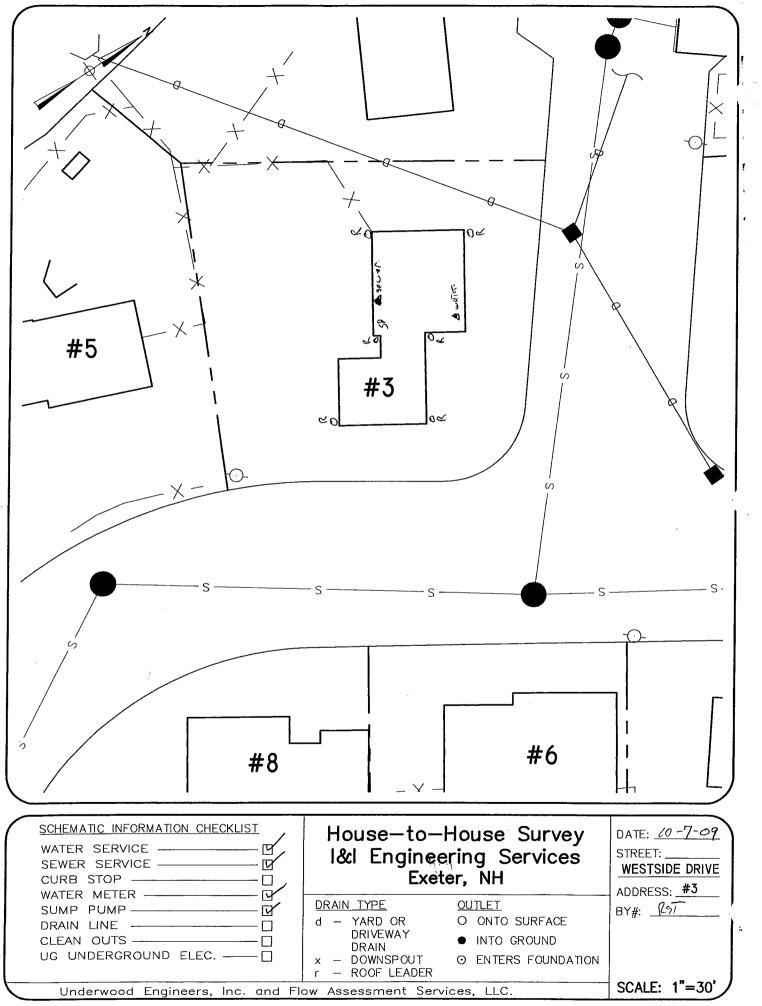

H:\SDSKPROJV. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:24:06 AM, rla

ot # Tax Map # Sub System Street #_ <u>4</u> . west side Dr. In	terviewer <u>RST/RM</u>
	· ,
Aulti Unit Res 🗅 Single Unit Res 🗊 Commercial 🗆 # of Units House Vacant 🗆	
Initial Visit:Date $10 - 6 - 09$ Time: 10.03 Unsuccessful, Left FlyerNot AdmittedInd Visit:Date $10 - 8 - 09$ Time: $14:10$ Unsuccessful, Left FlyerNot AdmittedId Visit:DateTime:Time: $14:10$ Unsuccessful, Left FlyerNot AdmittedId Visit:DateTime:Time: 10.03 UnsuccessfulNot Admitted	Other Other Other
. Have any of the following problems occurred?	
Flooded Basement 🖄 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: SUMP PUMPS TAKE CARE OF PROBLEM	
Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comments:	
Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Floor 🛛	Below Floor Level 🕅
Pipe Material: Cast Iron 🔽 PVC 🗆 Clay 🗆 Other	
Comments:	
→s there a Sump Pump? Yes A No □	
If yes, where does the pump discharge? Sanitary Sewer \Box Separate Pipe Out \Box Surface Δ Cannot Locate \Box	1
Unknown Other	-
Comments: RUNS OUT WINDOW	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out \Box Basement Drain \Box Open Pipe \Box Sump Pit X Recommend Dye Test \Box	
Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected	1 to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	ϕ
Flat Roof Drain System Vard Drain Window Well Drain Stair Well Drain Driveway Drain	
Comments:	
Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level	
Pipe Material: Copper V Plastic D Iron D Lead D Other Comments:	,
eral Comments:	
DTE – SEE SKETCH ON BACK	

.

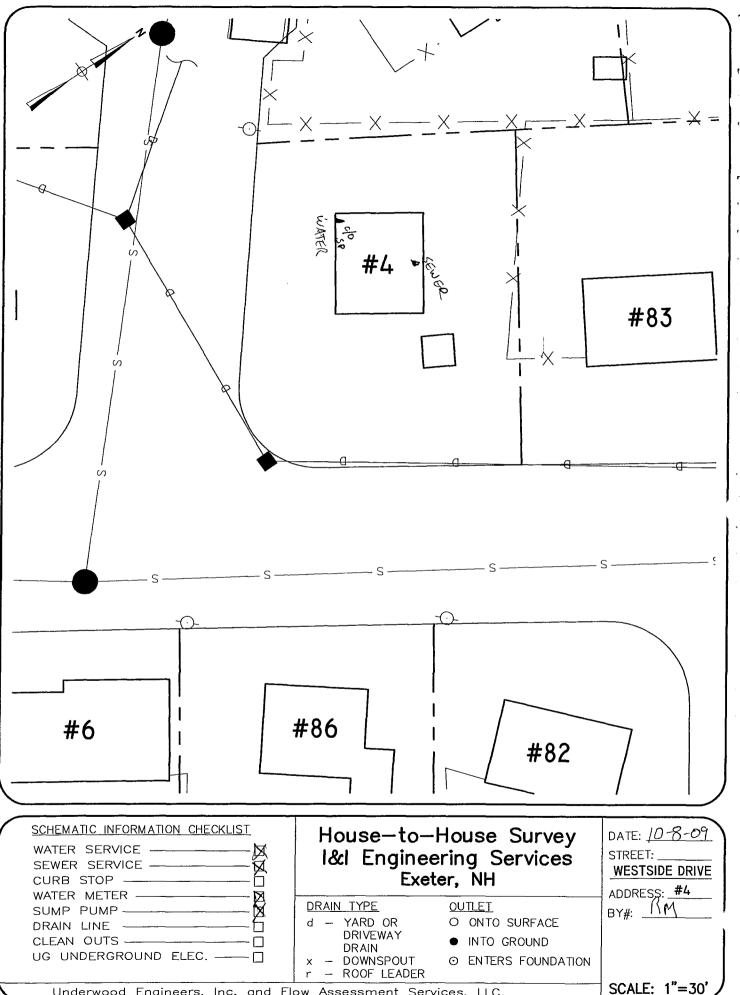


Underwood Engineers, Inc. and Flow Assessment Services, LLC.

..1542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:26:34 AM, rla H:\SDSKPROJ.

۰.

/I Engineering Services		Flow Assessment Services Bedford, NH
.ot # Tax Map # Sub System	Street # <u>5 westside</u>	Or Interviewer <u>RST/PPC</u>
Multi Unit Res 🗆 Single Unit Res 🗹 Commercial 🗆 # of Units	House Vacant □	ť
nitial Visit: Date 10-6-09 Time: 10:07- 2 ^{ad} Visit: Date Time: Time: 3rd Visit: Date Time: Time:	Unsuccessful, Left Flyer □ Not A Unsuccessful, Left Flyer □ Not A Unsuccessful Not A	dmitted Other .dmitted Other .dmitted Other
. Have any of the following problems occurred?		
Flooded Basement Sewage in Basement Clogged Pipe Comments:		
. Is there a basement? Full Basement 🖉 Crawl Space 🗆 Slab F	loor Dirt Floor Comments	:
Sewer Invert Information? Cannot Locate □ Distance From Bas Above Floor Level – Distance From Invert to Sill □	Unknown Distance From Fl	oor 🗆 Below Floor Level 🕅
⊥s there a Sump Pump? Yes □ No 🕅		
If yes, where does the pump discharge? Sanitary Sewer	ate Pipe Out 🗆 Surface 🗆 Cann	ot Locate 🗆
Unknown 🗆 Other		
Comments:		
Are the following present in the basement to collect water from the f Open Clean Out Basement Drain Open Pipe Sump I Comments:	Pit 🗆 Recommend Dye Test 🗆	
Any of the following present outside the building (Put quantity obse	rved in spaces marked and indicate	f connected to sewer)
Roof Leader (RL) Into Foundation RL Into Gr	ound RL Onto S	urface <u>3</u>
Flat Roof Drain System Yard Drain Window Well Drain		
Comments:		
Water Service Information: Cannot Locate Above Floor Level Distance from Sill	Below I	Floor Level
Pipe Material: Copper A Plastic I Iron Lead Ot	her Comm	ents:
neral Comments:		


NOTE – SEE SKETCH ON BACK

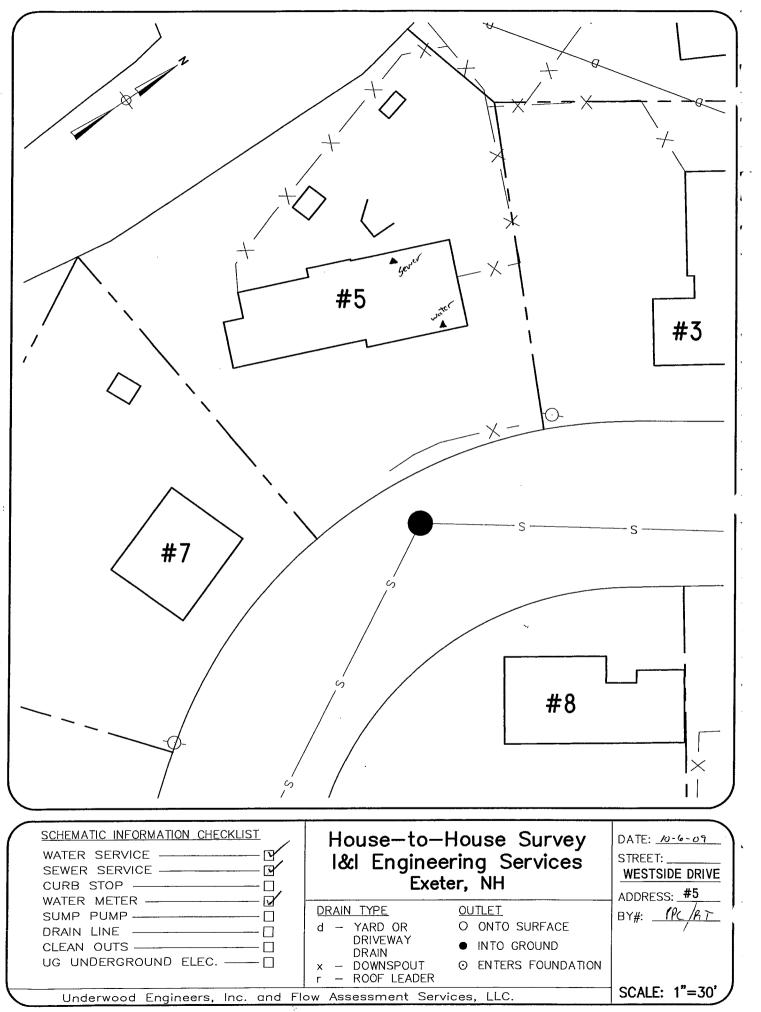


1/I Engineering Services Exeter, NH

Flow Assessment Services Bedford, NH

Lot #	Тах Мар #	Sub System	Street # <u>6 we</u>	ST Side Dr. Interviewer RST/ppc
	/		House Vacant	
Initial Visit: Date 2 nd Visit: Date 3rd Visit: Date	10-6-09 10-8-09 10-8-09	Time: $10:36$ Time: $14:18$ Time: $18:57$	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
	□ Sewage in Base	ment 🗆 Clogged Pipe 🗆		
2. Is there a basement	? Full Basement	Crawl Space 🗆 Slab	Floor 🗆 Dirt Floor 🗆 Co	mments:
Above Floor Level	– Distance From Inv ast Iron 🗶 – PVC 🛛	ert to Sill 🗆] Clay 🗅 Other		2″ From Floor □ Below Floor Level
If yes, where does t Unknown □ Othe	er	Sanitary Sewer 🗆 Sepa	arate Pipe Out □ Surface	
Open Clean Out 🗆	Basement Drain			
Roof Leader (RL) I Flat Roof Drain Sy	Into Foundation stem □ Yard Drai	RL Into 0 n □ Window Well Drai	Ground \cancel{p} RI n \Box Stair Well Drain \Box	indicate if connected to sewer) - Onto Surface <u>5</u> Driveway Drain []
. Water Service Inform Cannot Locate □ Pipe Material: Co	Above Floor Leve			Below Floor Level XComments:
eneral Comments:				
NOTE – SEE SKETC	H ON BACK			

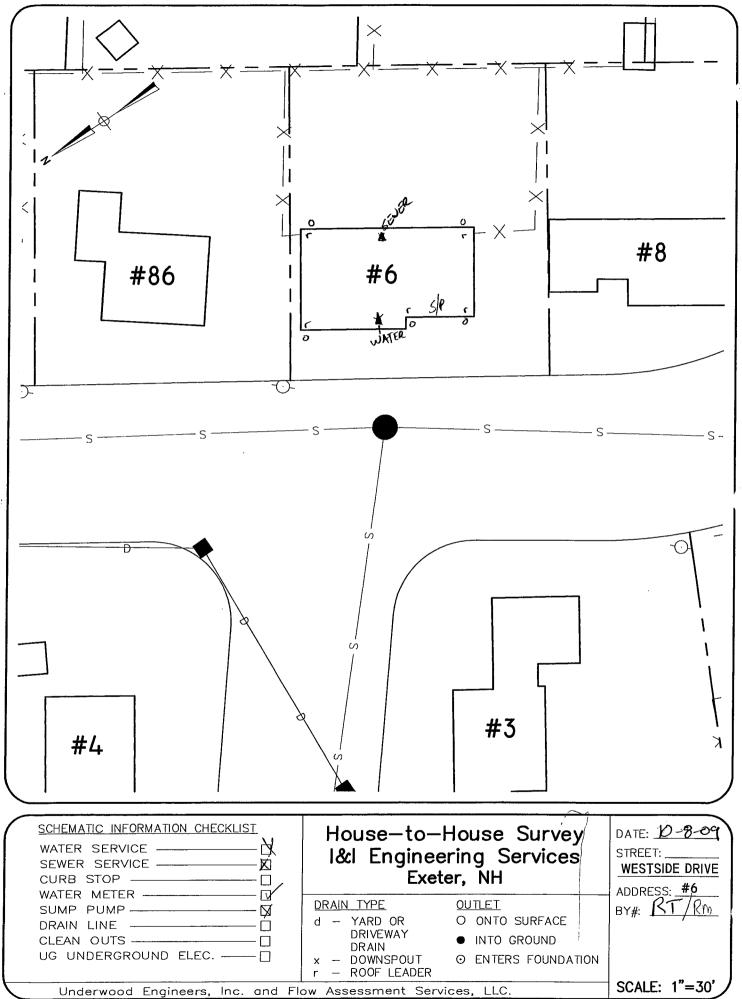


I/I Engineering Services Txeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street #7 &	esiside Dr. Interviewer 157/ppc
Multi Unit Res 🛛 Single Unit Res 🗗 Commercial 🗆 # of Units House Vacan	at 🗆
Initial Visit: Date 10-6-09 Time: 10.46 Unsuccessful, Left Flyer □ 2 nd Visit: Date Time: Unsuccessful, Left Flyer □ 3rd Visit: Date Time: Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other Other
1. Have any of the following problems occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments: Flooding From River in House Basement, Home owner	sand bags when necessary
3. Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	2.5
Pipe Material: Cast Iron P PVC □ Clay □ Other Comments:	
s there a Sump Pump? Yes D No	
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface 🗆	Cannot Locate 🗆
Unknown Other	
Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Comments:	Test 🗆
Any of the following present outside the building (Put quantity observed in spaces marked and	indicate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RI	Conto Surface
Flat Roof Drain System Vard Drain Window Well Drain Stair Well Drain Comments:	Driveway Drain 🗆
Water Service Information: Cannot Locate D Above Floor Level D Distance from Sill	Below Floor Level
Pipe Material: Copper Plastic 🗆 Iron 🗆 Lead 🗆 Other	Comments:
éral Comments:	

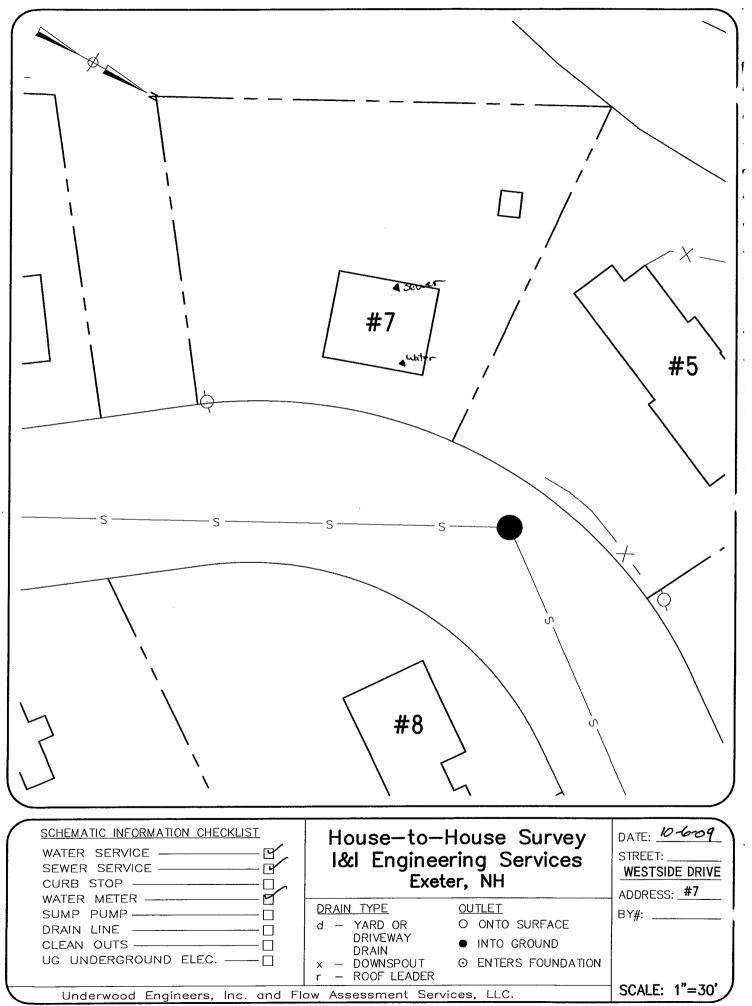

HASDSKPROJV. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:17:58 AM, rla


- 2

# Tax Map # Sub System Street # Street #S	<i>γ</i> · · ·
-	
al Visit: Date $10 - 6 - 09$ Time: $10 \cdot 42$ Unsuccessful, Left FlyerNot AdmittedOrVisit: Date $10 - 8 - 09$ Time: $1 \cdot 42$ Unsuccessful, Left FlyerNot AdmittedOrVisit: Date $10 - 12 - 09$ Time: 1134 UnsuccessfulNot AdmittedOr	
	her
ave any of the following problems occurred?	
ooded Basement 🛛 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
omments: <u>Sump pump Takes care of warer</u> .	
there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
wer Invert Information? Cannot Locate \Box Distance From Basement Floor to Sill \mathcal{BY}''	
bove Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Floor 🛛	Below Floor Level
be Material: Cast Iron D PVC D Clay D Other <u>Copper</u> .	
mments:	
there a Sump Pump? Yes D No 🗆	· · · · · · · · · · · · · · · · · · ·
yes, where does the pump discharge? Sanitary Sewer 🛛 Separate Pipe Out 🗆 Surface 🗆 Cannot Locate 🗆	
known I Other sump pump is Hooked into Floor Drain. unsure wh	ere Orain does
omments:	
e the following present in the basement to collect water from the floor? (indicate if connected to sewer) en Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	
mments:	
y of the following present outside the building (Put quantity observed in spaces marked and indicate if connected to	sewer)
oof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	
at Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Driveway Drain 🗆	
mments:	
ter Service Information:	
not Locate Above Floor Level Distance from Sill Below Floor Level	
e Material: Copper 12 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments:	
I Comments:	
E – SEE SKETCH ON BACK	

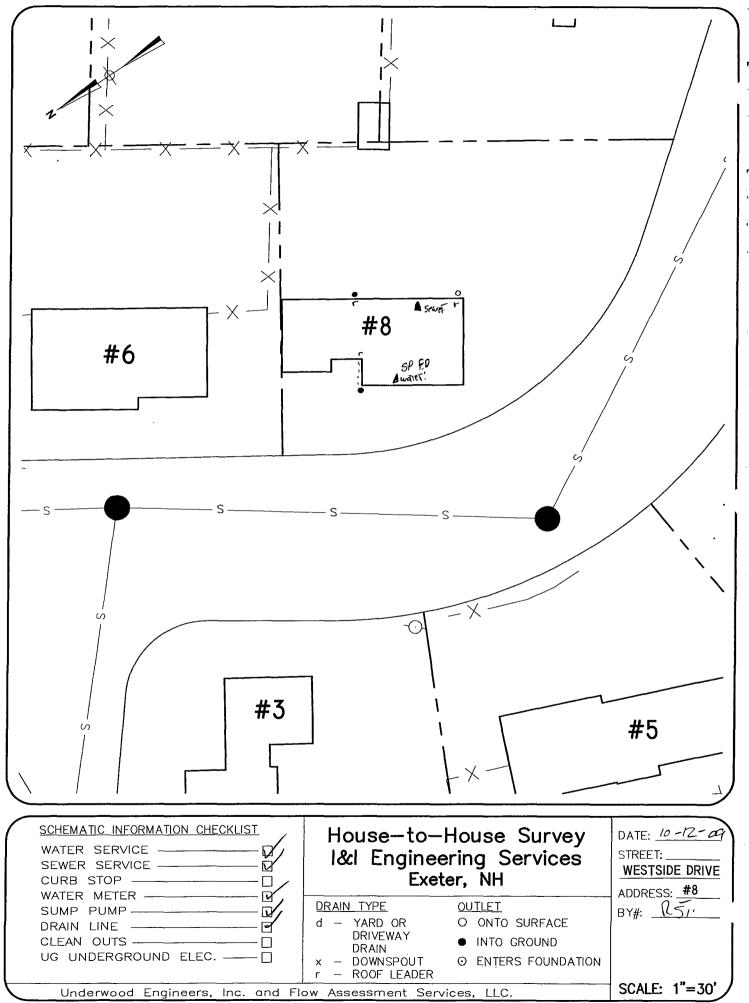

H:\SDSKPROJ\; 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:10:04 PM, rla


7/I Engineering Services Preter, NH			Flow Assessment Services Bedford, NH
.ot # Tax Map #	Sub System	Street # 9 Wesi	side DR Interviewer RST/PR
Multi Unit Res 🗆 Single Unit Res 🗖			
			Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following problems	occurred?		
Flooded Basement Gewage in Ba	asement 🗆 Clogged Pipe] Not Known 🖉 Other 🗆	
?. Is there a basement? Full Basement	🟹 Crawl Space □ Sla	b Floor 🗆 Dirt Floor 🗆 Co	mments:
3. Sewer Invert Information? Carnot	Locate Distance From	Basement Floor to Sill7	<u>8</u> ⁿ
Above Floor Level – Distance From	Invert to Sill 🗆	Unknown Distance	From Floor 🗆 🛛 Below Floor Level
Pipe Material: Cast Iron ty PV	C□ Clay□ Other	· · · · · · · · · · · · · · · · · · ·	/
Comments:			
If yes, where does the pump discharg			
Are the following present in the base Open Clean Out Basement Drain Comments:	n 🗆 Open Pipe 🗆 Sur	np Pit 🗆 Recommend Dye	ſest □
Any of the following present outside	the building (Put quantity of	bserved in spaces marked and i	indicate if connected to sewer)
Roof Leader (RL) Into Foundation	Ø RL Into	Ground <u>Ø</u> RI	Onto Surface <u>4</u>
Flat Roof Drain System 🗆 🛛 Yard D	,	ain 🗆 Stair Well Drain 🗆	
Comments:			
'. Water Service Information: Cannot Locate □ Above Floor Lo	evel 🗆 Distance from Sill		Below Floor Level
1			_ Comments:
jéneral Comments:			······
NOTE – SEE SKETCH ON BACK			

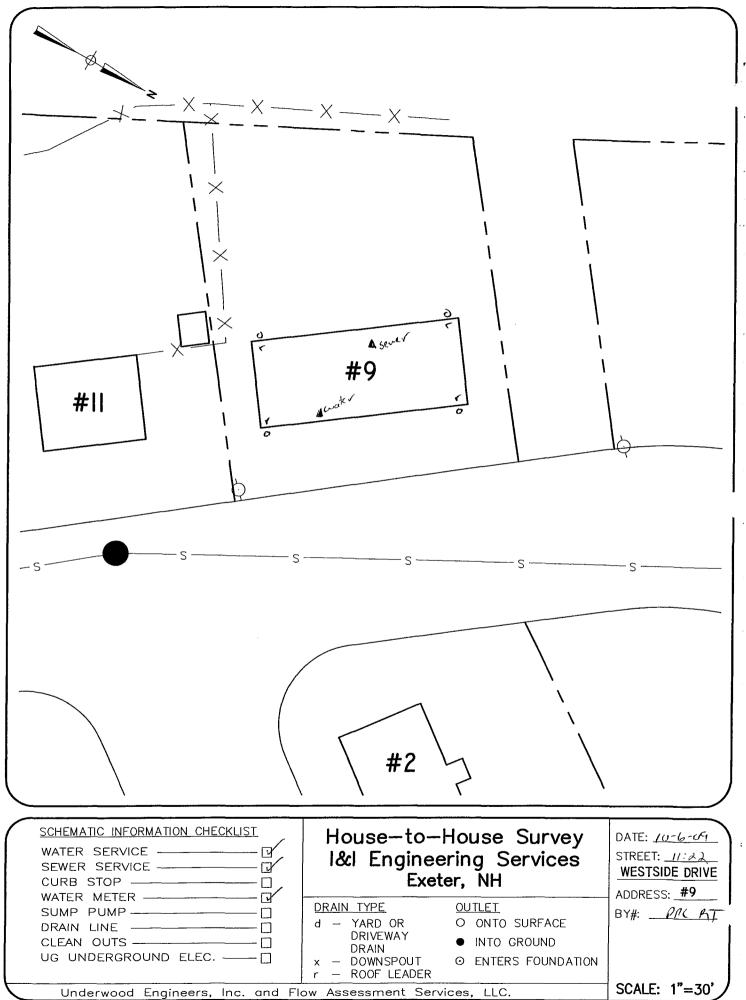

.

.

⁻ eter, NH	ering Services			Flow Assessment Service: Bedford, NH
ot #	Tax Map #	Sub System	Street # <u>// 4,25</u>	Tside Dr. Interviewer RST
			B House Vacan	
	(Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🛛	
. Have any of t	he following problems oc	curred?		
		Crawl Space 🗆 Slab	Floor 🗆 🛛 Dirt Floor 🗆 Co	mments:
. Sewer Invert)	Information? Cannot Lo	cate Distance From Ba	sement Floor to Sill -87	2 (1
Above Floor I	Level – Distance From Inv	ert to Sill 🗆	Unknown Distance I	h
	1			
Unknown 🗆	Other			Cannot Locate 🗆
			floor? (indicate if connected Pit □ Recommend Dye T	
Comments:				
Roof Leader (Flat Roof Dra	RL) Into Foundation in System 🗆 Yard Drain	RL Into G	round RL	ndicate if connected to sewer) Onto Surface Driveway Drain 🗆
Water Service Cannot Locate		Distance from Sill		Below Floor Level
Pipe Material:	Copper Plastic	Iron 🗆 Lead 🗆 O		Comments:
neral Comment	ts:			
OTE – SEE SK	ETCH ON BACK			

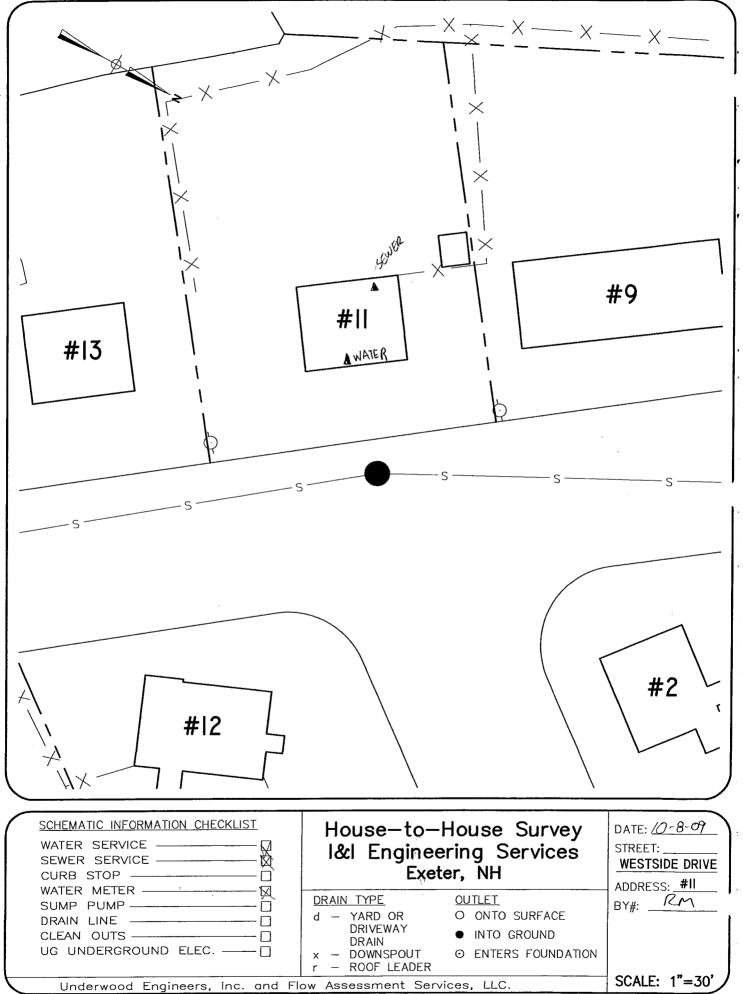


H:\SDSKPROJ\1. 342LDD\dwg\EXETER_GIS.dwg. HSE2HSE, 5/21/2009 11:13:58 AM, rla

[/I Engineering Services `eter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street #_12 & est side	Dr. Interviewer RST/PPC
Multi Unit Res 🛛 Single Unit Res 🗹 Commercial 🗆 # of Units House Vacant 🗆	, , , ,
Initial Visit: Date $10 - 6 - 09$ Time: 1152 Unsuccessful, Left FlyerNot A 2^{nd} Visit: Date $10 - 8 - 09$ Time: 1152 Unsuccessful, Left FlyerNot A 3^{rd} Visit: Date $10 - 8 - 09$ Time: 1152 Unsuccessful, Left FlyerNot A 3^{rd} Visit: Date $10 - 8 - 09$ Time: 1152 Unsuccessful, Left FlyerNot A	Admitted OtherAdmitted OtherAdmitted OtherAdmitted Other
1. Have any of the following problems occurred?	
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: (NEVER!) - SEALED BASEMENT WITH WATERP RESEALED EVERY 4 YEARS NO ISSUES WHATSOEVER	ROOFING 40 YEARS AGO.
2. Is there a basement? Full Basement Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments	S:
3. Sewer Invert Information? Cannot Locate D Distance From Basement Floor to Sill 77"	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Fl	loor 🛛 🛛 Below Floor Level 📐
Pipe Material: Cast Iron) PVC 🗆 Clay 🗆 Other	
Comments:	
is there a Sump Pump? Yes X No □ If yes, where does the pump discharge? Sanitary Sewer X Separate Pipe Out □ Surface □ Cann Unknown □ Other Other Comments: DIMPS DEHIMIDIFIER INTO SUMP PIT	
. Are the following present in the basement to collect water from the floor? (indicate if connected to sew Open Clean Out □ Basement Drain □ Open Pipe □ Sump Pit ☑ Recommend Dye Test □ Comments:	ver)
Any of the following present outside the building (Put quantity observed in spaces marked and indicate in Roof Leader (RL) Into Foundation RL Into Ground RL Onto S Flat Roof Drain System I Yard Drain I Window Well Drain I Stair Well Drain I Drivewar Comments:	Surface 3
Water Service Information:	Floor Level
Lieral Cominents:	
JOTE – SEE SKETCH ON BACK	

.


_

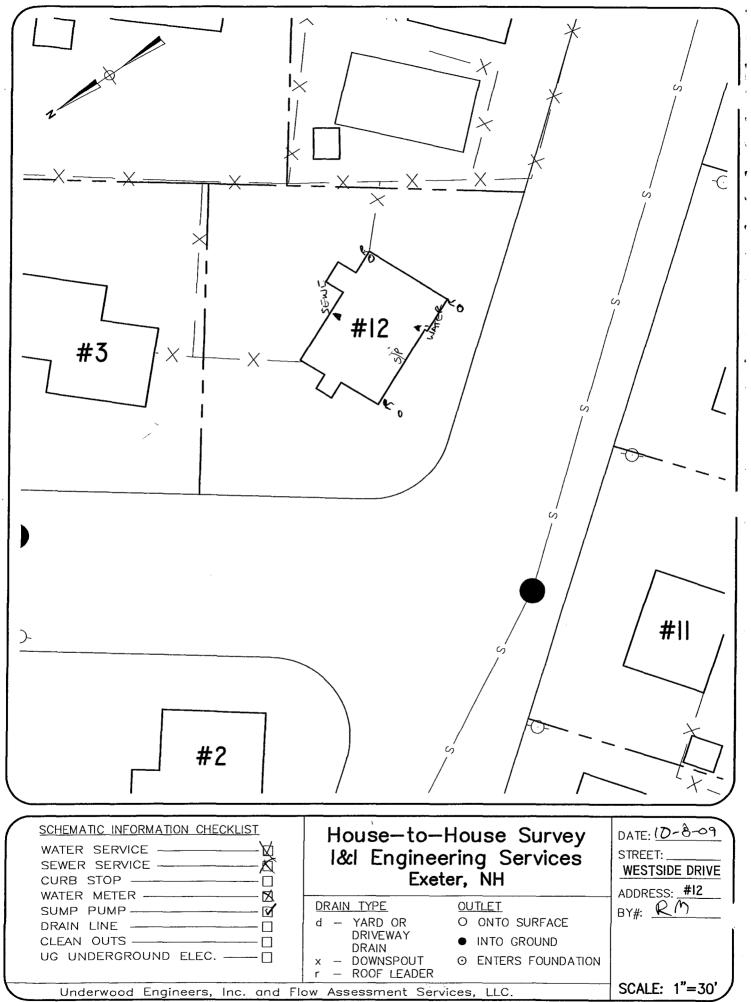

H:\SDSKPROJ\\ 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:20:03 PM, rla


HOI	USE	SU	R	VEY	•

[Engineering Services • Fer, NH	Flow Assessment Service Bedford, NH
t # Tax Map # Sub System Street # <u>13 West side p</u>	Interviewer RGT/PDC
Multi Unit Res D Single Unit Res C Commercial D # of Units House Vacant D	, , , , , , , , , , , , , , , , , , ,
itial Visit:Date $10-6-09$ Time: $11:50$ Unsuccessful, Left Flyer \Box Not Admitte 2^{nd} Visit:DateTime:Time:Unsuccessful, Left Flyer \Box Not Admitte 2^{nd} Visit:DateTime:UnsuccessfulNot Admitte	ed Other ed Other ed Other
. Have any of the following problems occurred?	
Flooded Basement 🛛 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: When heavy Rain water came up From Floor Drain. and Comented Floor D.	rain to stop water entry
Is there a basement? Full Basement 🕅 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	· · · · · · · · · · · · · · · · · · ·
Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill <u>61.5</u>	
Above Floor Level – Distance From Invert to Sill	Below Floor Level 🕱
Pipe Material: Cast Iron 🕱 PVC 🗆 Clay 🗆 Other	.,
Comments:	
`	
, there a Sump Pump? Yes D No 🕼	
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface 🗆 Cannot Loca	ate 🗆
Unknown 🛛 Other	
Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	
Comments: <u>Recently Filled with concut.</u>	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if conne	ected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	ø
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Driveway Drai	
Comments: <u>V</u>	
Water Service Information:	
Cannot Locate Above Floor Level Distance from Sill Below Floor L	level 1
Pipe Material: Copper & Plastic I Iron Lead OtherComments:	
aeral Comments:	
JOTE – SEE SKETCH ON BACK	

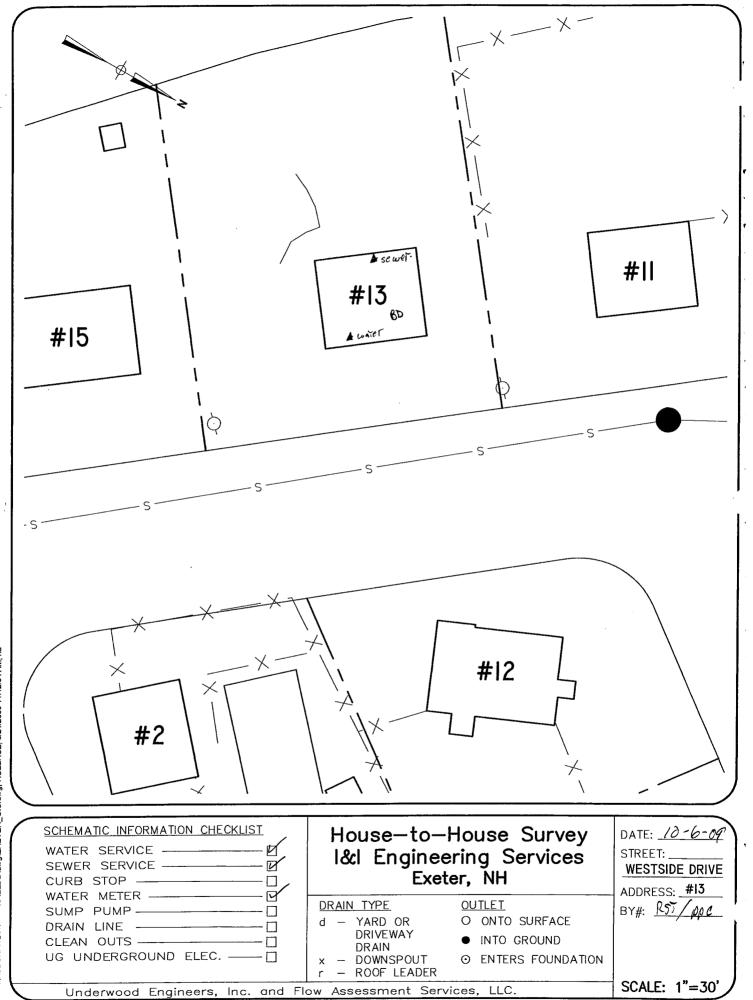

H:ISDSKPROJT, 542LDDIdwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:12:34 AM, rla


/I Engineering Services	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub System Street #_ <u>154.est</u>	side OF- Interviewer RST/ppc
Multi Unit Res 🛛 Single Unit Res 🕼 Commercial 🗆 # of Units House Vacant	
2^{na} Visit: Date <u>/O-8-07</u> Time: <u>79:50</u> Unsuccessful, Left Flyer	Not Admitted Other Not Admitted Other Not Admitted Other
I. Have any of the following problems occurred?	
Flooded Basement 🕅 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: NO FLOOD SINCE SUMP PUMP WAS INSTALLED	
. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Com	ments:
. Sewer Invert Information? Cannot Locate 🗆 Distance From Basement Floor to Sill 🖉 🖉	1
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance Fr	om Floor 🛛 🛛 Below Floor Level 🕅
Pipe Material: Cast Iron 🗶 PVC 🗆 Clay 🗆 Other	
Comments:	
. ; there a Sump Pump? Yes No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface X Unknown Other Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments: CO CAPPED	o sewer) st 🗆
Any of the following present outside the building (Put quantity observed in spaces marked and ind	icate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL C	ento Surface
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Dr	iveway Drain 🗆
Comments:	
Water Service Information:	elow Floor Level
Pipe Material: Copper Plastic Plastic Iron Lead Other	
éral Comments:	
NOTE – SEE SKETCH ON BACK	

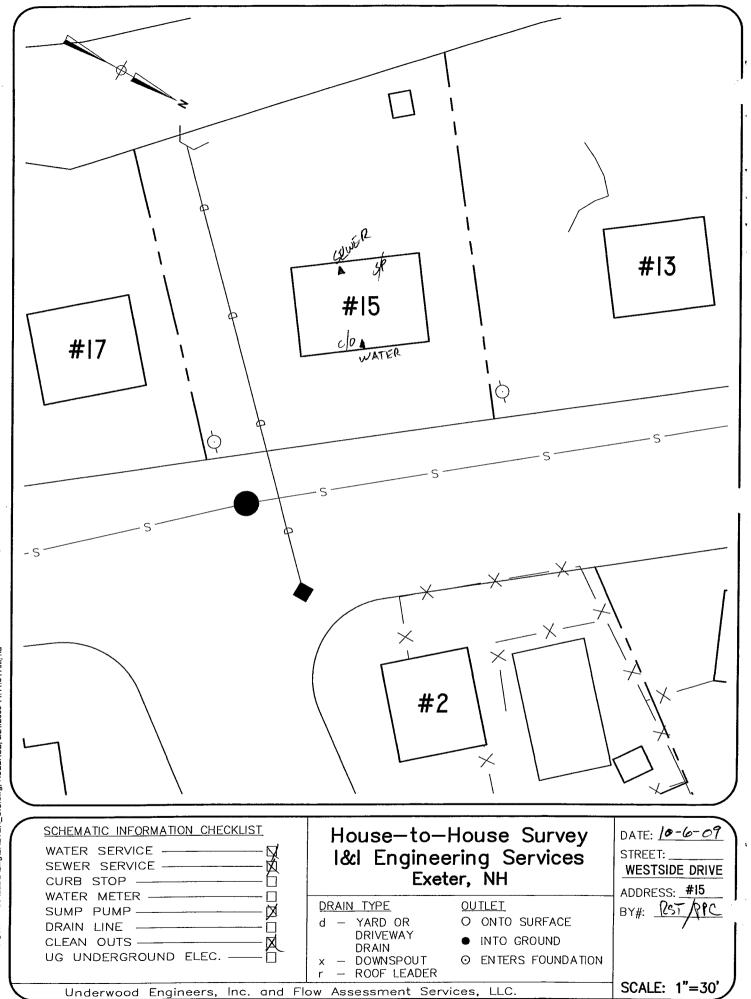

.542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:11:34 AM, rla

H:\SDSKPROJ\\


/I Engineering Services ter, NH	Flow Assessment Services Bedford, NH
.ot # Tax Map # Sub System Street # _}	Theorside DF Interviewer RST/PPR
Multi Unit Res 🛛 Single Unit Res 🖌 Commercial 🗆 # of Units Hou	
nitial Visit: Date $12-6-09$ Time: $1/59$ Unsuccessful, Left 2^{nd} Visit: DateTime:Unsuccessful, Left 3^{rd} Visit: DateTime:Unsuccessful	Flyer Not Admitted Other Flyer Not Admitted Other Not Admitted Other
1. Have any of the following problems occurred?	
Flooded Basement 🗅 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Ot	her 🛛
Comments:	
. Is there a basement? Full Basement & Crawl Space Slab Floor Dirt Floor ني	PRIFTING FURNISHED BASE NOT
·. Sewer Invert Information? Cannot Locate □ Distance From Basement Floor to Sill	81"
Above Floor Level – Distance From Invert to Sill 🗆 Unknown I	
Pipe Material: Cast Iron 🗹 PVC 🗆 Clay 🗆 Other	
Comments:	
. is there a Sump Pump? Yes D No D	
If yes, where does the pump discharge? Sanitary Sewer \Box Separate Pipe Out \Box Separat	urface 🗆 Cannot Locate 🗆
Unknown Other	
Comments:	
5. Are the following present in the basement to collect water from the floor? (indicate if c Open Clean Out Basement Drain Open Pipe Sump Pit Recomme	connected to sewer) nd Dye Test □
Comments:	
. Any of the following present outside the building (Put quantity observed in spaces mark	ked and indicate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground	RL Onto Surface
' Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Dra	
Comments:	
Water Service Information:	
Cannot Locate \Box Above Floor Level \Box Distance from Sill $\underline{CD.3}^{\prime\prime}$	
Pipe Material: Copper 🗹 Plastic 🗆 Iron 🗆 Lead 🗆 Other	Comments:
Laferal Comments:	
NOTE – SEE SKETCH ON BACK	

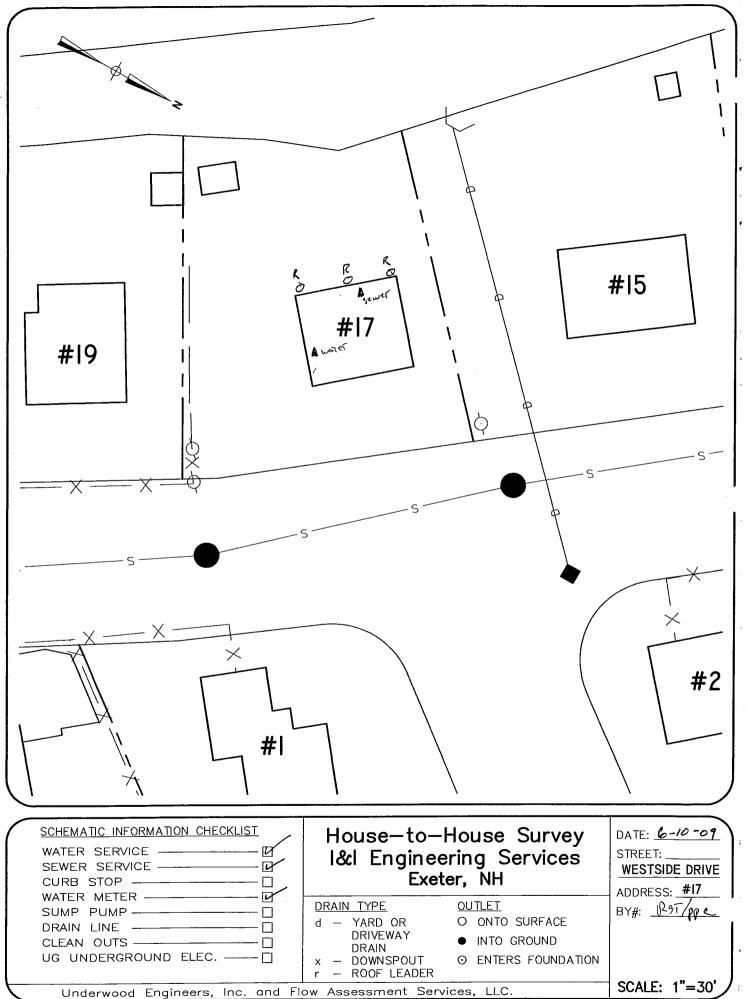

H:\SDSKPROJ\i. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:10:39 AM, rla

. .


/I Engineering Services				Flow Assessment Services Bedford, NH
.ot # Tax Map #	Sub System	Street # <u>19 wes</u>	Tside DT	Interviewer <u>kst/ppc/RS</u>
Multi Unit Res 🛛 🛛 Single Unit Res 🛛				A.
nitial Visit: Date $10-6-09$ 2^{nd} Visit: Date $10-8-09$ 3^{nd} Visit: Date $10-12-09$	Time: /4-5/	Unsuccessful, Left Flyer	Not Admitte	U Other U Other U Other Other
1. Have any of the following problems	occurred?			0
Flooded Basement 🗆 Sewage in B	asement 🗆 Clogged Pipe 🗆	Not Known 🗆 Other 🗆		
Comments:				
2. Is there a basement? Full Basement	t 🗆 Crawl Space 🗆 Slab	Floor 🗆 Dirt Floor 🗆 Co	mments:	
. Sewer Invert Information? Cannot	Locate 🗆 Distance From B	asement Floor to Sill		
Above Floor Level – Distance From	Invert to Sill 🗆 📃	Unknown Distance	From Floor 🛛	Below Floor Level
Pipe Material: Cast Iron 🗆 PV	C 🗆 Clay 🗆 Other			·
Comments:				·
S there a Sump Pump? Yes □ N If yes, where does the pump discharg Unknown □ Other Comments:	ge? Sanitary Sewer 🗆 Sep		<u> </u>	te []
Are the following present in the base Open Clean Out □ Basement Drai Comments:	n 🗆 Open Pipe 🗆 Sumj	p Pit 🗆 Recommend Dye T	°est □	
Any of the following present outside	the building (Put quantity ob	served in spaces marked and in	ndicate if conne	cted to sewer)
Roof Leader (RL) Into Foundation	RL Into (Ground RL	Onto Surface	
Flat Roof Drain System 🛛 🛛 Yard D				
Comments:				
Water Service Information:				
	evel 🗆 Distance from Sill		Below Floor Le	vel 🗆
Pipe Material: Copper 🗆 Plastic	C Iron Lead (Other	Comments:	
meral Comments:Qetied	access By a			
NOTE – SEE SKETCH ON BACK				

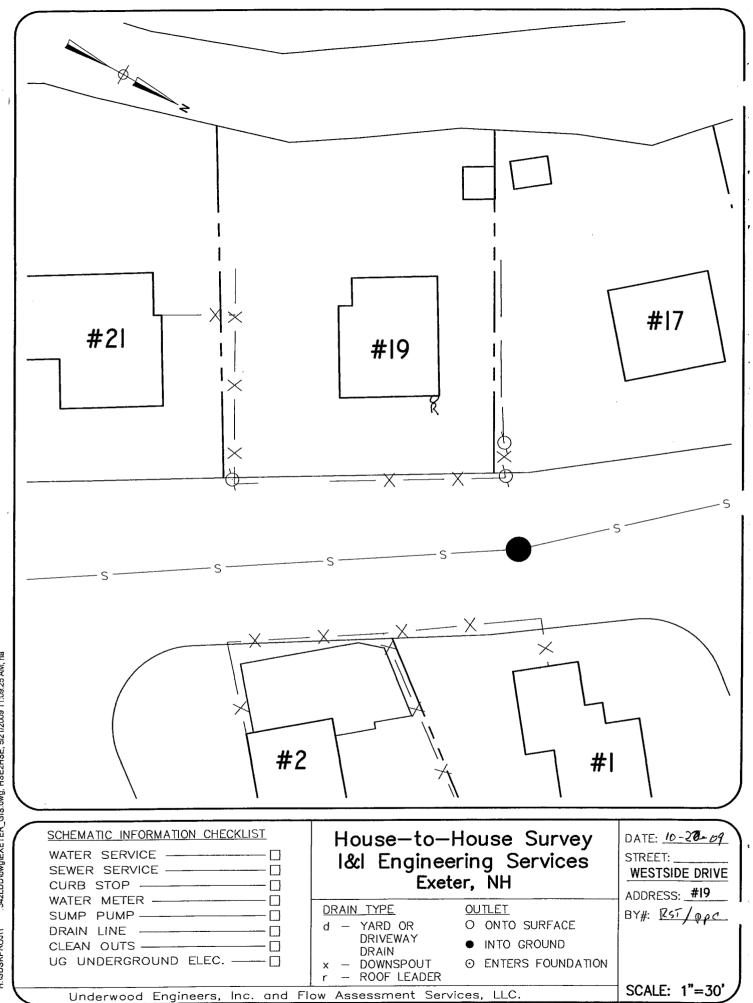

.542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:09:25 AM, rla

H'\SDSKPROJ\


' "eter, NH			Flow Assessment Services Bedford, NH
ot # Tax Map #	Sub System	Street # 20 west	-side Dr. Interviewer RST/PAC
Multi Unit Res 🛛 Single Unit Res 🗹	Commercial 🗆 # of Units	S House Vacant	
nitial Visit: Date $10-L-09$ 2^{nd} Visit: Date 3rd Visit: Date	Time: <u>12.28</u> Time: Time:	Unsuccessful, Left Flyer D Unsuccessful, Left Flyer D Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
	ement 🗆 Clogged Pipe 🗆		
2. Is there a basement? Full Basement D	Crawl Space 🗆 Slab	Floor 🗆 Dirt Floor 🗆 Co	mments:
-	vert to Sill	Unknown Distance	
	? Sanitary Sewer 🗆 Sepa		Cannot Locate 🗆
 Are the following present in the basem Open Clean Out Basement Drain Comments: 	□ Open Pipe □ Sum	p Pit IV Recommend Dye 1	l to sewer) Test □
 6. Any of the following present outside the Roof Leader (RL) Into Foundation Flat Roof Drain System □ Yard Drate Comments: 	Min D Window Well Drai	Ground RL n 🗆 Stair Well Drain 🗆	
7. Water Service Information: Cannot Locate Above Floor Lev			Below Floor Level @

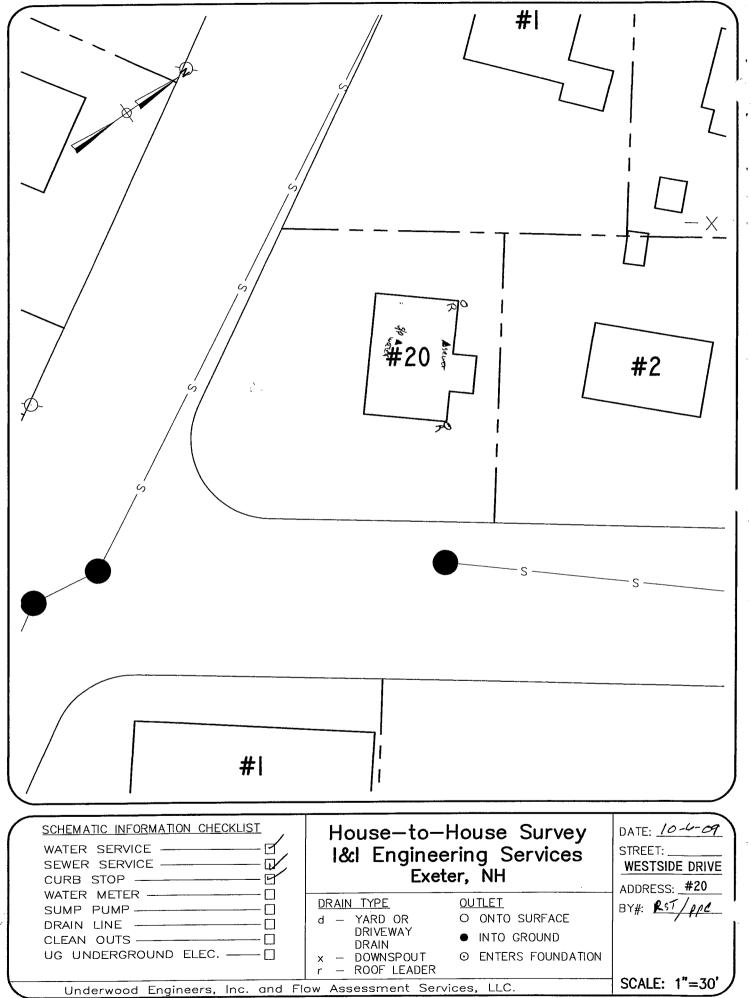

542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:31:19 PM, rla

H:\SDSKPROJ, 542LDD\dwg\EXETER


/I Enginee	ring Services				Flow Assessment Service Bedford, NH
Lot #	Tax Map #	Sub System	Street # <u>21 wes</u> ī	side or In	terviewer <u>RST/RM</u>
Multi Unit Res	🗆 Single Unit Res 🗊	Commercial □ # of Units _	House Vacant	:0	l t
Initial Visit: Da 2 nd Visit: Da 3rd Visit: Da	te $10-6-09$ te $10-8-09$ te $10-8-09$	Time: $12/4$ L Time: $17:57$ L Time: $18:20$ L	Jnsuccessful, Left Flyer □ Jnsuccessful, Left Flyer □ Jnsuccessful	Not Admitted 🗆	OtherOtherOther
Flooded Base		nent 🗆 Clogged Pipe 🗆 N			
. Is there a base	ment? Full Basement	Crawl Space 🗆 Slab Flo	oor 🗆 🛛 Dirt Floor 🗆 Co	nments:	
Above Floor I Pipe Material:	Level – Distance From Inve Cast Iron X PVC 🗆	ate Distance From Base art to Sill Clay Other	Unknown Distance I	From Floor 🛛	~
If yes, where a Unknown 🗆	Other	Sanitary Sewer 🗆 Separat			
Open Clean O	ut 🗆 Basement Drain 🗆	t to collect water from the flo Open Pipe 🗆 Sump Pi	it 🗆 Recommend Dye T	est 🗆	
Roof Leader (Flat Roof Drai	RL) Into Foundation in System 🗆 Yard Drain	ouilding (Put quantity observ ✓ RL Into Gro □ Window Well Drain □	und RL	Onto Surface	3
Water Service Cannot Locate Pipe Material:	Information: □ Above Floor Level	□ Distance from Sill]	Below Floor Level	,
Leral Comment	s:				
OTE – SEE SK	ETCH ON BACK				

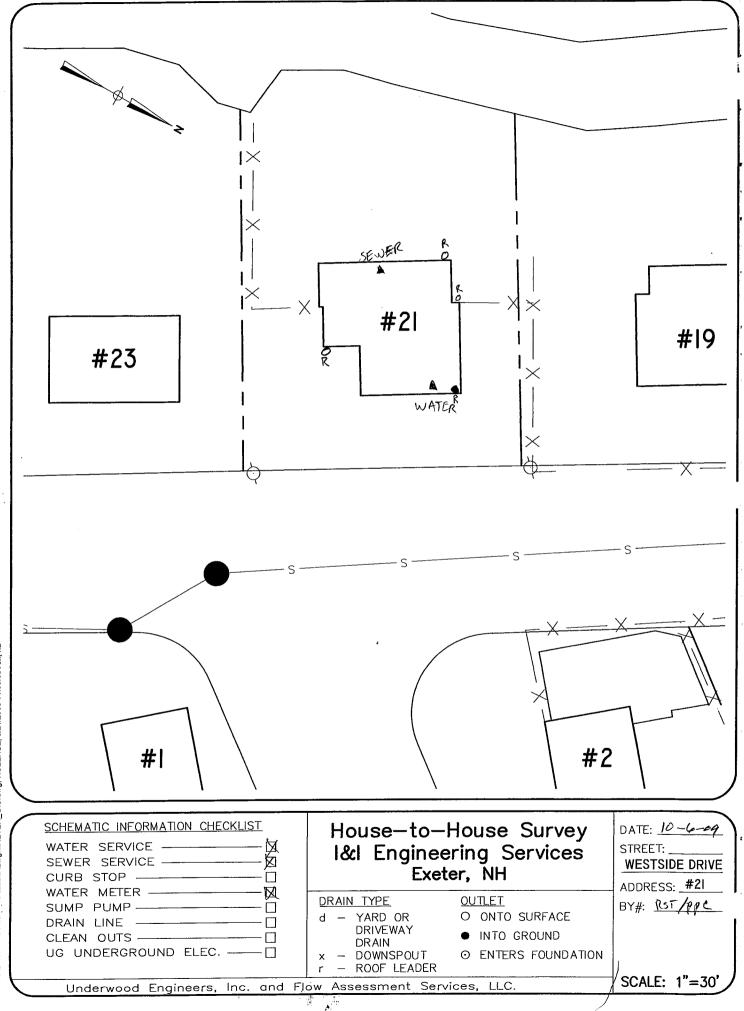

.342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:08:08 AM, rla H:\SDSKPROJ\\


瓷

I Engineering Services				Flow Assessment Service Bedford, NH
ot # Tax Map #	Sub System	Street # <u>23 wes</u> 7	side or	Interviewer 257/ppc
Multi Unit Res 🗆 🛛 Single Unit R				
nitial Visit: Date <u>10-6-06</u> 2 nd Visit: Date Brd Visit: Date	Y Time: /2/'7 Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted [Not Admitted [Not Admitted]	□ Other □ Other □ Other
. Have any of the following proble				
Flooded Basement 🕅 Sewage i	n Basement 🗆 Clogged Pipe 🗆	Not Known 🗆 Other 🗆		
Comments: WATER in BASEN	LENT when Riser above be	inks, used sump pu	p TO SurFe	ace to compat prople
Is there a basement? Full Basem	ient 🗹 Crawl Space 🗆 Slab	Floor 🗆 Dirt Floor 🗆 Co	mments:	
Sewer Invert Information? Can	not Locate 🗆 Distance From B	asement Floor to Sill8	0.5"	
Above Floor Level – Distance Fr				Below Floor Level
Pipe Material: Cast Iron	PVC 🗆 Clay 🗆 Other			
Comments:				
, there a Sump Pump? Yes 🛛	No 🗅			
If yes, where does the pump discl	narge? Sanitary Sewer 🗆 Sepa	arate Pipe Out 🗆 Surface 🗗	Cannot Locate	
Unknown 🗆 Other				
Comments: <u>portable pu</u>	mp. TO SurFace when	reeded By home on	NET / NO :	sump pit.
Are the following present in the b Open Clean Out Basement D	asement to collect water from the Drain 🕑 Open Pipe 🗆 Sump	floor? (indicate if connected Pit Recommend Dye T	to sewer) est □	
Comments: Drain Filled	with concrete.			
Any of the following present outs	ide the building (Put quantity obs	served in spaces marked and in	dicate if connect	ed to sewer)
Roof Leader (RL) Into Foundatio	n RL Into (Fround RL	Onto Surface	¢
Flat Roof Drain System 🗆 Yar	d Drain 🗆 Window Well Drain	n 🗆 Stair Well Drain 🗆 I	Driveway Drain []
Comments:				
Water Service Information	r Level □ Distance from Sill			
Pipe Material: Copper 🗗 Pla	stic 🗆 Iron 🗆 Lead 🗆 C	Other	Comments:	
eral Comments: <u>Cur B 570p</u>	Located in walking	5" above surface.		
JOTE – SEE SKETCH ON BACK	Lecally II Walk Way	5 above Surrole.		

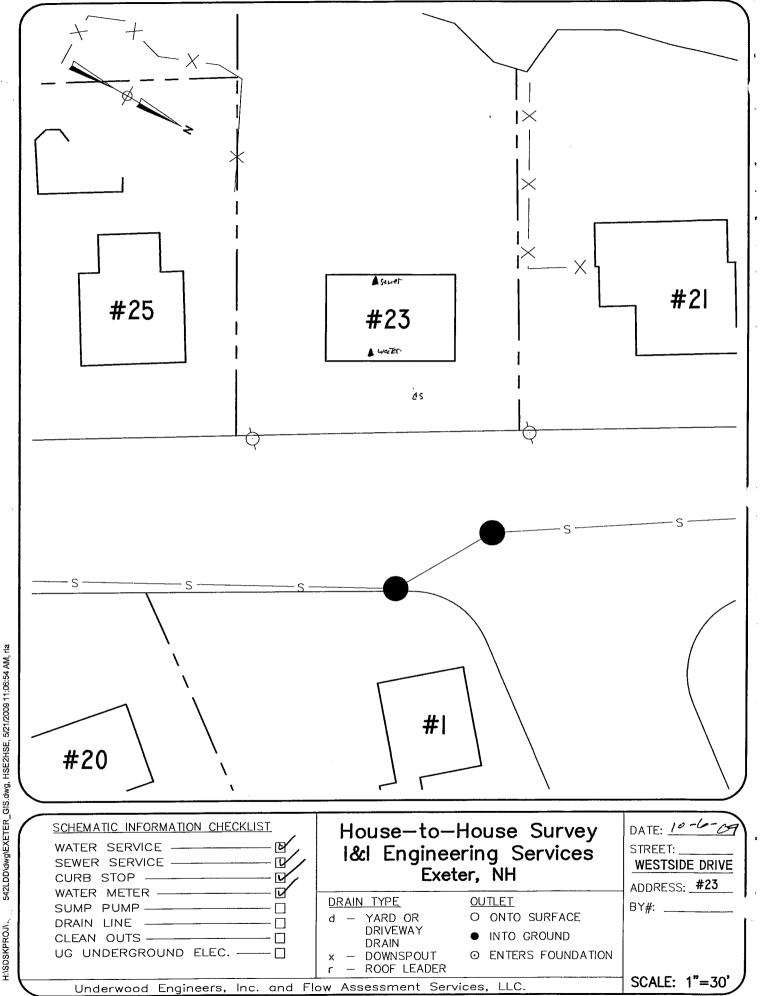


542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:06:54 AM, rla

I/I Engineering Services	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # _ 25 65 5 3 2 1	PR Interviewer RST/PPC
Multi Unit Res 🛛 Single Unit Res 🗗 Commercial 🗆 # of Units House Vacant 🗆	, , , .
Initial Visit: Date 10-6-09 Time: 1337 Unsuccessful, Left Flyer □ Not Admitte 2 nd Visit: Date Time: Unsuccessful, Left Flyer □ Not Admitte 3rd Visit: Date Time: Unsuccessful Not Admitte	Image: Other
1. Have any of the following problems occurred?	
Flooded Basement 🕼 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: Used Sump pump TO discarge water out window To Su	ulface.
2. Is there a basement? Full Basement 🕼 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
3. Sewer Invert Information? Cannot Locate D Distance From Basement Floor to Sill 78"	
Above Floor Level – Distance From Invert to Sill N 42" Unknown Distance From Floor	Below Floor Level
Pipe Material: Cast Iron 🕑 PVC 🗆 Clay 🗆 Other	· · · · · · · · · · · · · · · · · · ·
Comments:	
's there a Sump Pump? Yes INO I If yes, where does the pump discharge? Sanitary Sewer I Separate Pipe Out I Surface I Cannot Loc Unknown I Other	
Comments: Owner states she discharges Through window as Nerdad!	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out □ Basement Drain □ Open Pipe □ Sump Pit □ Recommend Dye Test □ Comments:	
. Any of the following present outside the building (Put quantity observed in spaces marked and indicate if conn	ected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	4
Flat Roof Drain System □ Yard Drain □ Window Well Drain □ Stair Well Drain □ Driveway Drai	
Water Service Information:	
Cannot Locate Above Floor Level Distance from Sill UNKNOWN Below Floor L Pipe Material: Copper Plastic Iron Lead Other Comments:	
vieral Comments:	
NOTE – SEE SKETCH ON BACK	

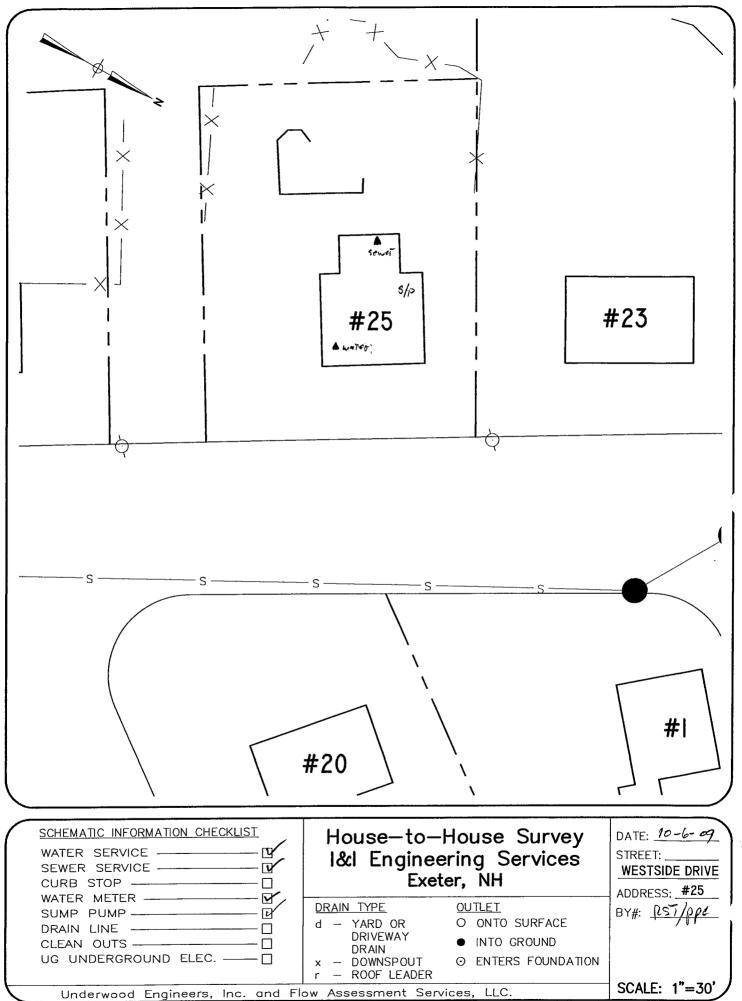


H:\SDSKPROJ\\ 542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/21/2009 11:05:57 AM, rla

eter, NH			Flow Assessment Servic Bedford, NH
Tax Map #	Sub System	Street # <u>27</u> и	estside OF Interviewer RST/PAC
Multi Unit Res 🛛 🛛 Single Unit Res 🗹			
nitial Visit: Date <u>10-6-09</u> nd Visit: Date rd Visit: Date	Time: Time: Time:	Unsuccessful, Left Flyer D Unsuccessful, Left Flyer D Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following problems oc	curred?		
. Is there a basement? Full Basement &	Crawl Space 🗆 Slat	b Floor 🗆 Dirt Floor 🗆 Cor	nments:
	vert to Sill D	<u>73</u> Unknown Distance F Copρer	rom Floor Below Floor Level
As there a Sump Pump? Yes \square No \square If yes, where does the pump discharge? Unknown \square Other Comments: $_ \square \square \square \square \square \square$	Sanitary Sewer 🕅 Sep		Cannot Locate
Are the following present in the baseme Open Clean Out Basement Drain Comments:] Open Pipe 🗆 Sum	p Pit Price Recommend Dye To	to sewer) est □
	RL Into n □ Window Well Draj	Ground <u>Ø</u> RL	Onto Surface 3
Water Service Information: Cannot Locate Above Floor Level	l 🗆 Distance from Sill	I	1
	· · · · · · · · · · · · · · · · · · ·		

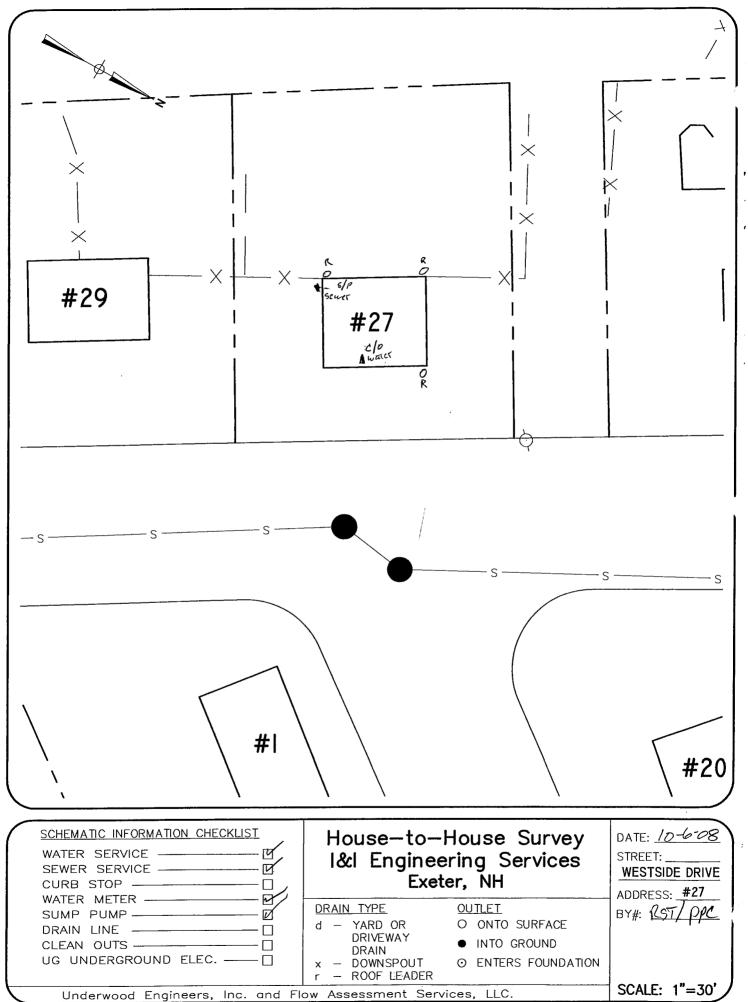


H:\SDSKPROJ\f: 542LDD\dwg\EXETER_G|S.dwg, HSE2HSE, 5/21/2009 11:04:35 AM, rla

I/I Engineering Services ¹⁷ xeter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 29 wesi	side Dr Interviewer (CST/ppc
Multi Unit Res 🛛 Single Unit Res 🕑 Commercial 🗆 # of Units House Vacant 🗆	, , , ,
Initial Visit:Date $10 - 6 - 09$ Time: 1404 Unsuccessful, Left FlyerNo 2^{nd} Visit:DateTime:Unsuccessful, Left FlyerNo $3rd$ Visit:DateTime:UnsuccessfulNo	ot Admitted Other ot Admitted Other ot Admitted Other Ot Admitted Other
1. Have any of the following problems occurred? Flooded Basement 🗹 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: pumped water TO Ground Surface / Basement drain.	
2. Is there a basement? Full Basement 🕑 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comm	ents:
3. Sewer Invert Information? Cannot Locate □ Distance From Basement Floor to Sill Above Floor Level – Distance From Invert to Sill □ Unknown Distance From Pipe Material: Cast Iron □ PVC □ Clay □ Other Comments:	n Floor 🛛 Below Floor Level 📴
Is there a Sump Pump? Yes I No B If yes, where does the pump discharge? Sanitary Sewer I Separate Pipe Out I Surface I C Unknown I Other Comments:	
5. Are the following present in the basement to collect water from the floor? (indicate if connected to a Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Comments:	to Surface
7. Water Service Information: Cannot Locate Above Floor Level Distance from SillBel Pipe Material: Copper Plastic Iron Lead OtherCo	low Floor Level
réneral Comments:	· · · · · · · · · · · · · · · · · · ·
NOTE – SEE SKETCH ON BACK	

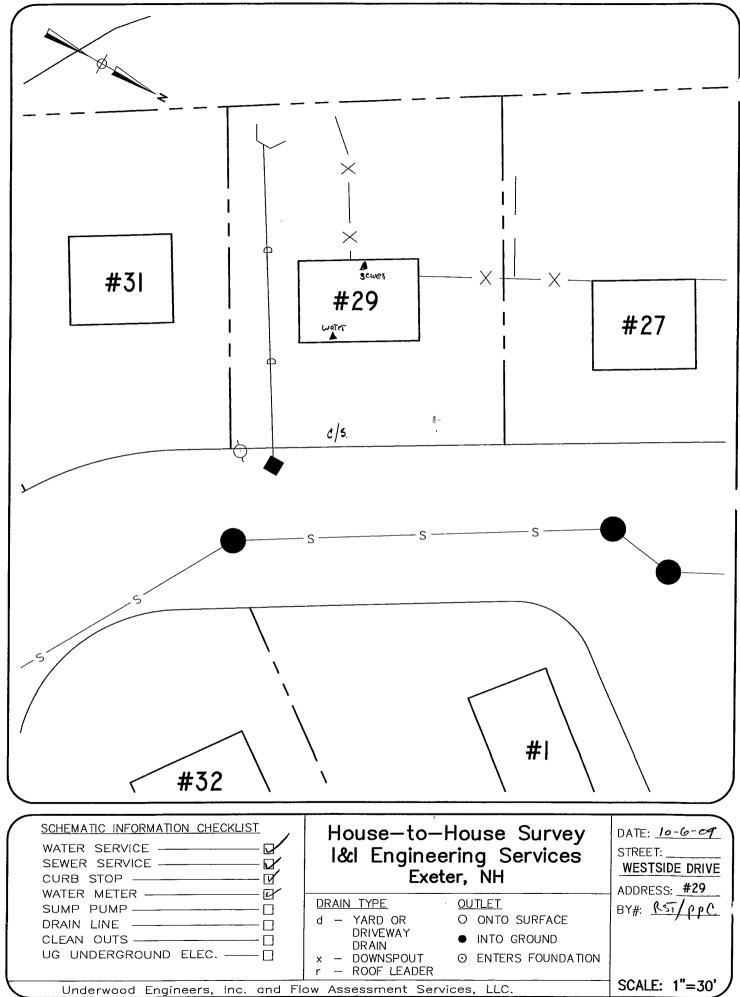

H:ISDSKPROJN 542LDDIdwglEXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:03:28 AM, rla


(/I Engineering Service eter, NH	S.			Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # 31 6	estgide Dr. Inte	rviewer ROF/ PPC R
	t Res 🕼 Commercial 🗆 # of Uni			y · · ·
Initial Visit: Date $10 - 6$ - 2^{nd} Visit: Date $10 - 8 - 6$ 3rd Visit: Date $10 - 12$	$\begin{array}{c} 0 \ 9 \\ 5 \ 9 \\ \hline 7 \\ 7 \\ 9 \\ \hline 7 \\ 9 \\ \hline 7 \\ 9 \\ \hline 7 \\ \hline 9 \\ \hline 7 \\ \hline 10 \\ \hline 10 \\ \hline 10 \\ \hline 3 \\ \hline 9 \\ \hline 7 \\ \hline 10 \\ \hline 10 \\ \hline 3 \\ \hline 9 \\ \hline 7 $	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted 🗆 🛛	Other Other Other
	e in Basement □ Clogged Pipe □			
. Is there a basement? Full Bas	ement 🕱 Crawl Space 🗆 Slal	b Floor □ Dirt Floor □ C	omments:	
Above Floor Level – Distance Pipe Material: Cast Iron 🕱	annot Locate Distance From F From Invert to Sill S S	Unknown Distance	From Floor	
Unknown 🗆 Other	(No □ ischarge? Sanitary Sewer □ Sep			
Open Clean Out 🗆 Basemen	e basement to collect water from th t Drain Open Pipe Sum	p Pit □ Recommend Dye	Test 🗆	
Any of the following present of	utside the building (Put quantity of	oserved in spaces marked and i	ndicate if connected to	o sewer)
Roof Leader (RL) Into Founda	tion RL Into	Ground RI	, Onto Surface _	
-	ard Drain □ Window Well Dra		Driveway Drain 🗆	
Water Service Information: Cannot Locate Above Fl	oor Level □ Distance from Sill		Below Floor Level	√
_	Plastic Iron Lead		/	
Leral Comments:				
NOTE – SEE SKETCH ON BAC	K			

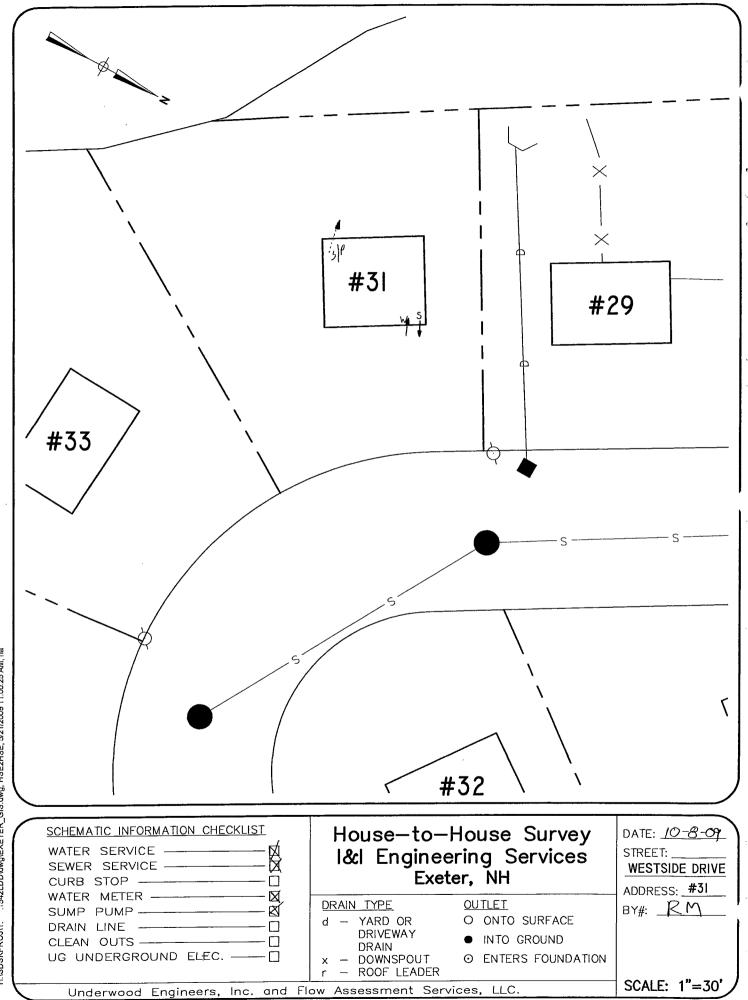

...542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:00:25 AM, ria

H:\SDSKPROJVi.


/I Engineering Services · '~eter, NH	Flow Assessment Services Bedford, NH
ot # Tax Map # Sub System Street # 32 wesi Side DR	Interviewer RST) PPC
Multi Unit Res 🛛 Single Unit Res 🗳 Commercial 🗆 # of Units House Vacant 🗆	
nitial Visit: Date 10-6-09 Time: 1422 Unsuccessful, Left Flyer Not Admitted 2 nd Visit: Date Time: Unsuccessful, Left Flyer Not Admitted Not Admitted Brd Visit: Date Time: Unsuccessful Unsuccessful Not Admitted Not Admitted	Other Other Other
. Have any of the following problems occurred?	
Flooded Basement 🗗 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: <u>Sump</u> <u>Pump</u>	
Is there a basement? Full Basement 😰 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:	
. Sewer Invert Information? Cannot Locate 🗆 Distance From Basement Floor to Sill85.1 "	
	Below Floor Level
Pipe Material: Cast Iron 🛛 PVC 🗆 Clay 🗆 Other	
Comments:	
. , there a Sump Pump? Yes No □ If yes, where does the pump discharge? Sanitary Sewer □ Separate Pipe Out □ Surface Cannot Locate □ Unknown □ Other Comments: <u>Sump discharges TO Back of Louse</u> (Surface.	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain & Open Pipe Sump Pit & Recommend Dye Test Comments: <u>Centured</u> OFully.	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connecte	ed to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface	¢
Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Drain	
Comments:	
Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level	1
Pipe Material: Copper 🕼 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments:	
ral Comments:	
IOTE – SEE SKETCH ON BACK	

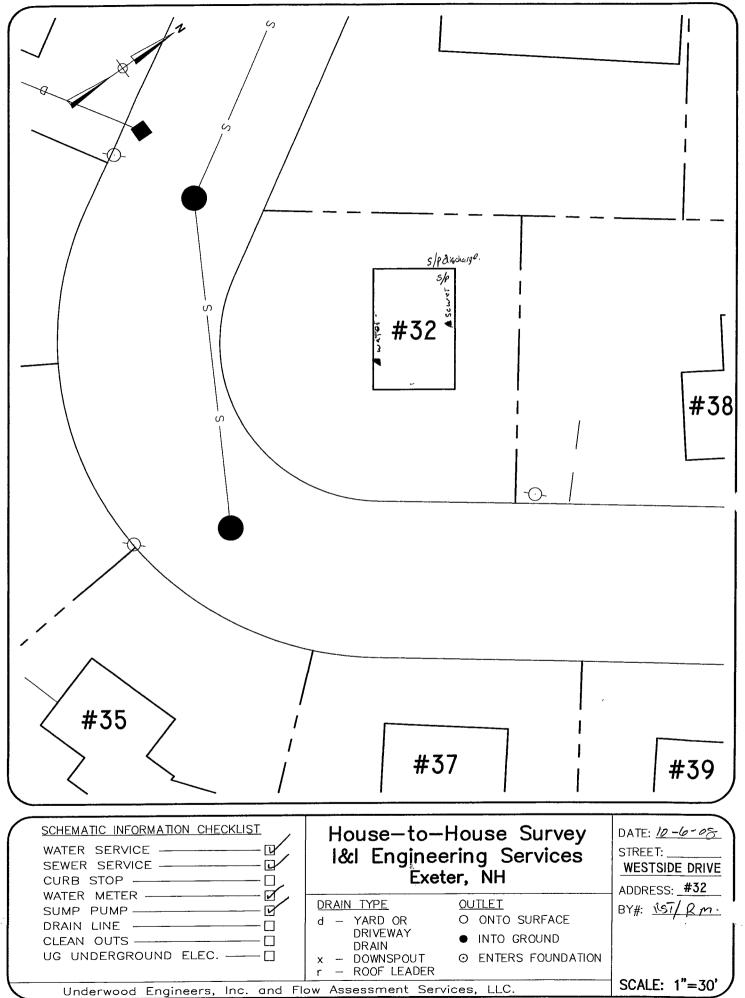

342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:21:33 PM, rla


H:\SDSKPROJ\

/I Enginee eter, NE	ering Services I				Flow Assessment Service Bedford, NH
_ot #	Tax Map #	Sub System	Street # <u>33</u> 4	estside Dr. Inte	rviewer RST/ppe
			its House Vacan		
nitial Visit: D 2 nd Visit: D 3rd Visit: D	ate <u>10-6-09</u> ate	Time: 14/4 Time:	Unsuccessful, Left Flyer 🗆 Unsuccessful, Left Flyer 🗆 Unsuccessful	Not Admitted Not Admitted Not Admitted Not Admitted	Other Other Other
Flooded Base	used sump TO	ent 🗆 Clogged Pipe 🗆	surface.		
Is there a bas	ement? Full Basement 🕼	Crawl Space Slal	b Floor 🗆 Dirt Floor 🗆 Co	mments:	
Above Floor ? Pipe Material	Level – Distance From Inve : Cast Iron 🚺 PVC 🗆	rt to Sill	Basement Floor to Sill <u>8</u> 9	From Floor	
If yes, where Unknown □	Other		parate Pipe Out □ Surface 🗹		
Open Clean C	Dut 🗌 Basement Drain 🗆	Open Pipe □ Sum	e floor? (indicate if connected p Pit Recommend Dye T	est 🗆	
Roof Leader (Flat Roof Dra	(RL) Into Foundation	RL Into	oserved in spaces marked and ir Ground RL in D Stair Well Drain D J	Onto Surface∅ Driveway Drain □	
Water Service Cannot Locate Pipe Material:	Above Floor Level				
aeral Commen	ts:				
OTE – SEE SK	KETCH ON BACK				

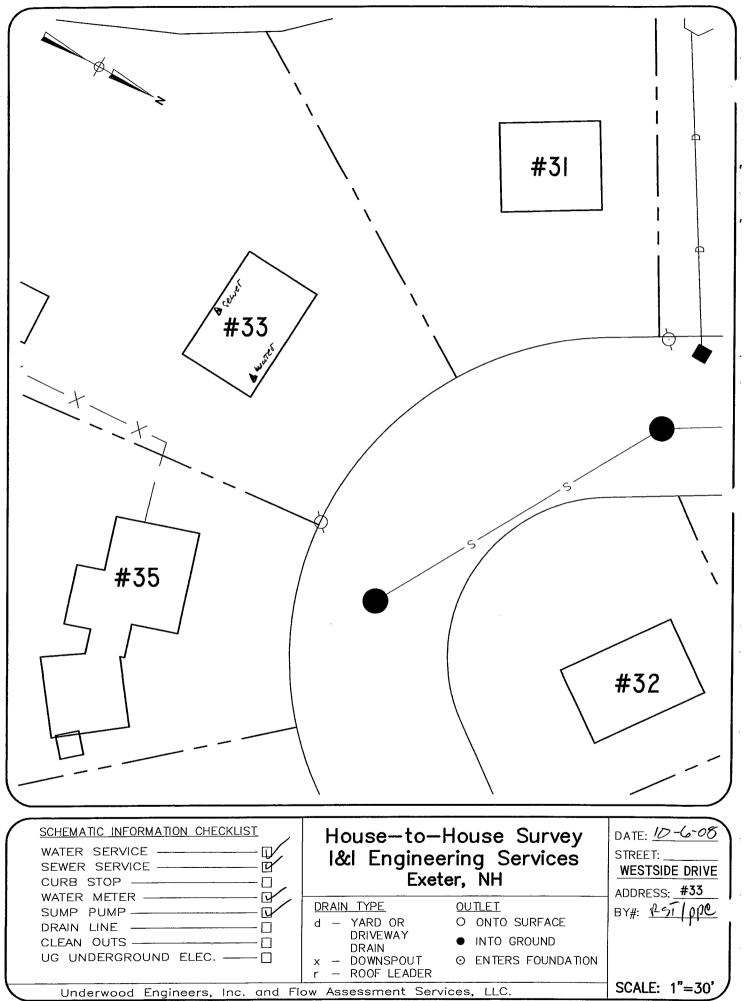


H:\SDSKPROJ\i542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:01:09 AM, rla

I/I Engineering Services	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub Syste	m Street # 33 4.057 Side Dr Interviewer RST ppc
Multi Unit Res 🛛 Single Unit Res 🗗 Commercial 🗆 #	
Initial Visit: Date $10 - 6 - 09$ Time: 1433 2^{nd} Visit: DateTime:Time: $3rd$ Visit: DateTime:Time:	Unsuccessful, Left Flyer Not Admitted Other Unsuccessful, Left Flyer Not Admitted Other Unsuccessful Not Admitted Other Not Admitted Other
	Pipe 🗆 Not Known 🗆 Other 🗆
	Slab Floor Dirt Floor Comments:
3. Sewer Invert Information? Cannot Locate Distance	From Basement Floor to Sill 81.5
Above Floor Level – Distance From Invert to Sill 🗆 Pipe Material: Cast Iron 🕼 PVC 🗆 Clay 🗆 Othe	Unknown Distance From Floor Below Floor Level From Floor Below Floo
s there a Sump Pump? Yes I No □ If yes, where does the pump discharge? Sanitary Sewer □ Unknown □ Other Comments: <u>Postable Sump discarges</u>	
5. Are the following present in the basement to collect water f Open Clean Out Basement Drain Open Pipe Comments: <u>Clean out Capped</u> .	
	ntity observed in spaces marked and indicate if connected to sewer)
Flat Roof Drain System Vard Drain Window We Comments:	
. Water Service Information: Cannot Locate □ Above Floor Level □ Distance from S	Below Floor Level Other Comments:
ueral Comments:	
NOTE – SEE SKETCH ON BACK	·

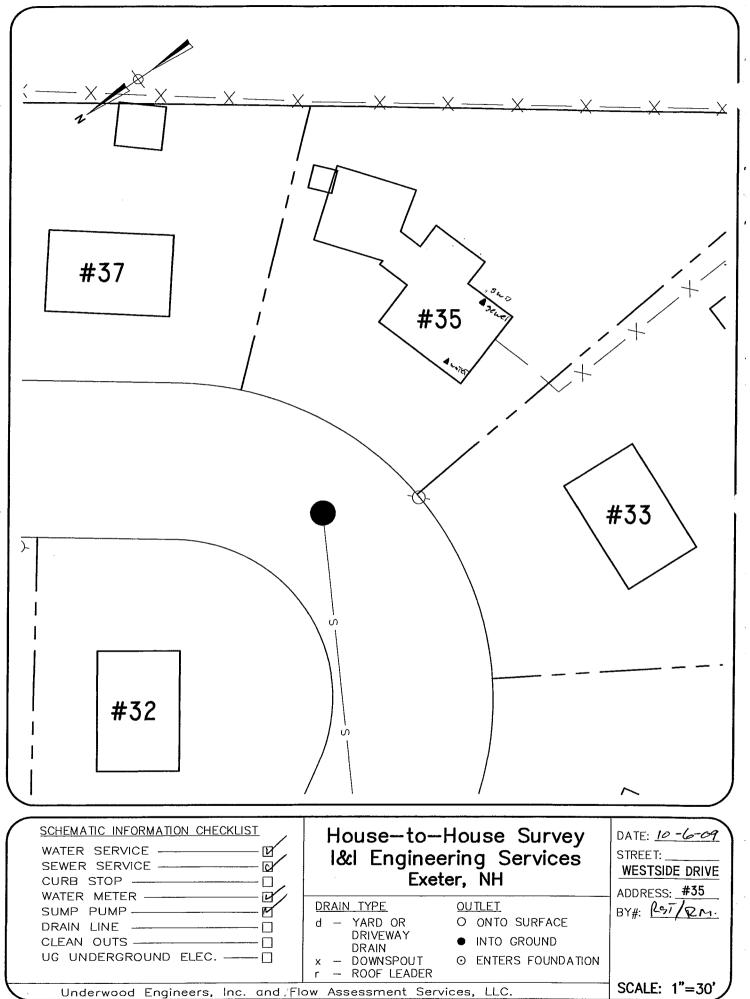

[–] eter, NH	ervices			Flow Assessment Services Bedford, NH
Lot # Ta	x Map #	Sub System	Street # 38 6-257	Side Dr. Interviewer RST/ppc
			its House Vacan	
Initial Visit: Date <u>10</u> 2 nd Visit: Date Brd Visit: Date	-6-09	Time: Time: Time:	Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🗆 Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
Comments: <u>SWMp</u>	Sewage in Base	ment□ Clogged Pipe □		
. Is there a basement?	Full Basement 🛙	Crawl Space 🗆 Sla	b Floor 🛛 🛛 Dirt Floor 🗆 Co	mments:
Comments:	fron V PVC C ? Yes V No C pump discharge?	Clay Other	parate Pipe Out □ Surface □	•
			e via a rand drainli	Ke Striem
Open Clean Out 🗆 🖪	asement Drain □	Open Pipe □ Sum	ne floor? (indicate if connected np Pit I Recommend Dye 1	
Roof Leader (RL) Into Flat Roof Drain System	Foundation	RL Into		
	•			· · · · · · · · · · · · · · · · · · ·
	bove Floor Level		Other	Below Floor Level


NOTE – SEE SKETCH ON BACK

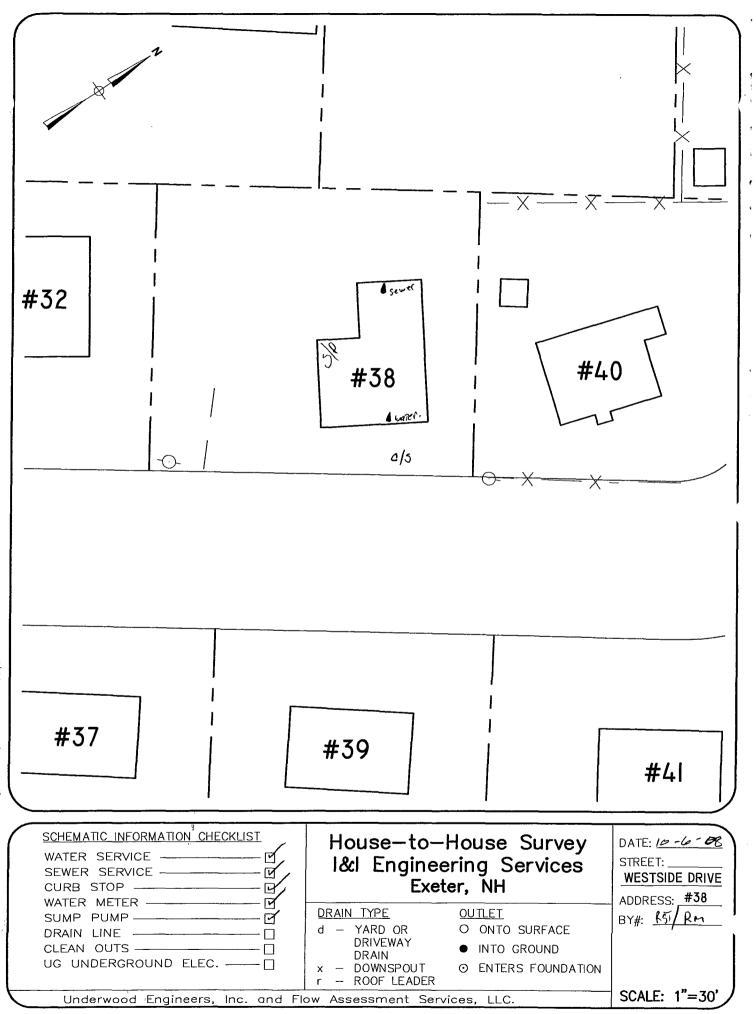

H:\SDSKPROJ\ 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:17:01 PM, rla


7 Engineering Servi ter, NH	ces		Flow Assessment Services Bedford, NH
	# Sub System	Street # <u>39 & e</u>	st side Dr. Interviewer RST/ppe
Multi Unit Res 🛛 🛛 Single U	nit Res 🗗 Commercial 🗆 # of Unit	ts House Vacan	t 🛙
itial Visit: Date <u>10-6</u> 2 nd Visit: Date	Time: 1502 Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
	age in Basement □ Clogged Pipe □		
. Is there a basement? Full B	asement 🕼 Crawl Space 🗆 Slab	Floor 🛛 🛛 Dirt Floor 🗆 Co	mments:
Above Floor Level – Distance Pipe Material: Cast Iron Comments:	PVC 🗆 Clay 🗆 Other	Unknown Distance H	From Floor Below Floor Level Cannot Locate
Open Clean Out 🛛 Baseme		p Pit 🛛 Recommend Dye T	`est □
Roof Leader (RL) Into Found Flat Roof Drain System D		Ground RL	Onto Surface
1	loor Level □ Distance from Sill		
ueral Comments:			

NOTE – SEE SKETCH ON BACK

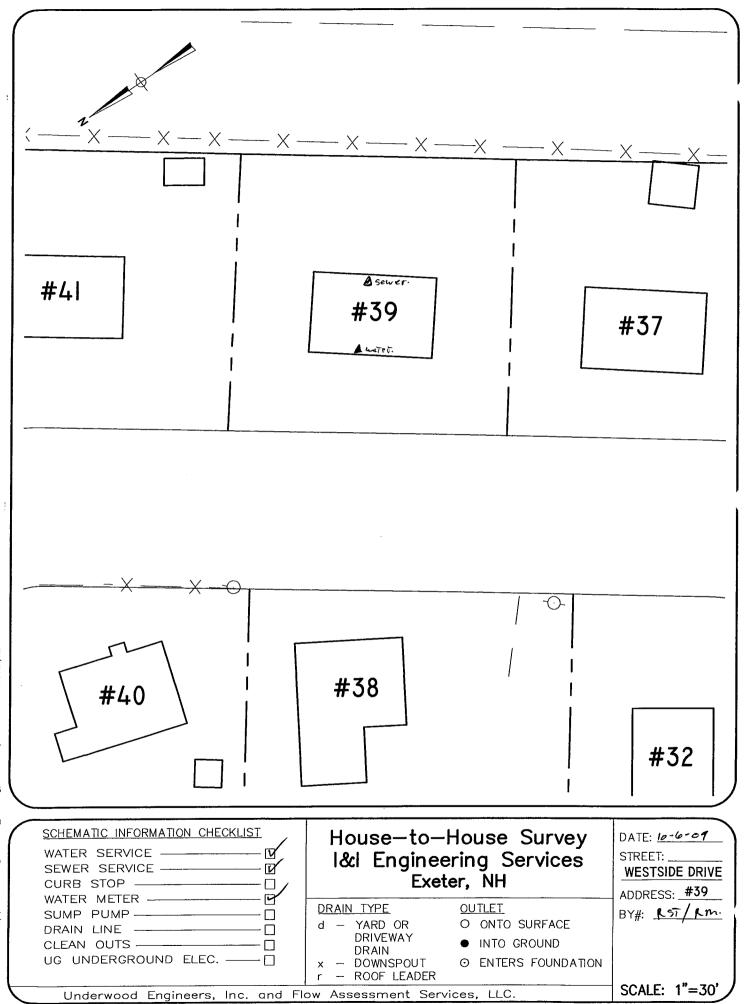

/I Engineering Services	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # 40 6 6973	side DF_Interviewer_RST/ppc/RS
* Iulti Unit Res □ Single Unit Res E Commercial □ # of Units House Vacant □	
2 nd Visit: Date $(0 - 8 - 39)$ Time: $/2.40$ Unsuccessful, Left Flyer \Box No	ot Admitted Other Ot Admitted Other Ot Admitted Other Other
1. Have any of the following problems occurred?	
Flooded Basement 🗹 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: installed Sump pump To Take care of problem	
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comme	ents:
. Sewer Invert Information? Cannot Locate 🗆 Distance From Basement Floor to Sill 82"	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From	<i>.</i>
Pipe Material: Cast Iron 🕑 PVC 🗆 Clay 🗆 Other	
Comments:	
`	
s there a Sump Pump? Yes ⊟ No □	
If yes, where does the pump discharge? Sanitary Sewer \Box Separate Pipe Out \Box Surface \Box Ca	annot Locate 🗆
Unknown 🗆 Other	
Comments:	
5. Are the following present in the basement to collect water from the floor? (indicate if connected to so Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test	3
Comments: <u>Copped clean out</u>	
Any of the following present outside the building (Put quantity observed in spaces marked and indica	ate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto	o Surface
i i	eway Drain 🗆
Comments:	·
Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Belo	w Floor Level
Pipe Material: Copper I Plastic I Iron I Lead I Other Cor	nments:
uleral Comments:	

NOTE - SEE SKETCH ON BACK

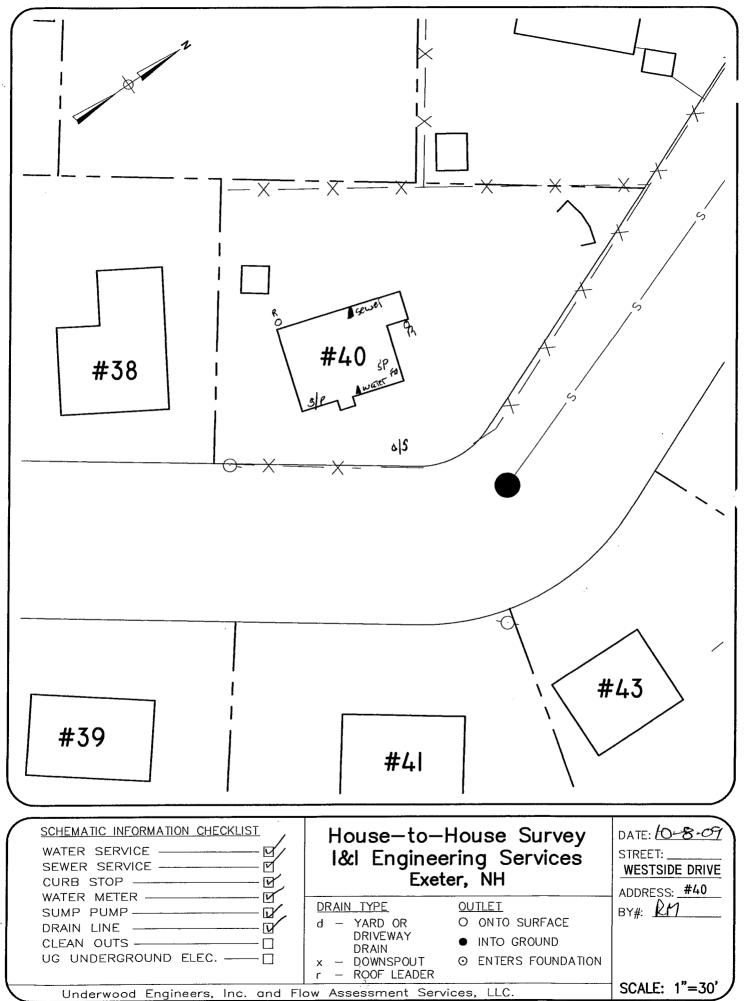


H.\SDSKPROJ\ 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 2:14:51 PM, rla

OWNER STATES She has No Time - AST oday

HOUSE SURVEY

l/I Engineering Services	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # <u>41 we si si</u>	de DF Interviewer RST/RM
Aulti Unit Res 🛛 Single Unit Res 🕼 Commercial 🗆 # of Units House Vacant 🗆	,
itial Visit: Date $10-6-09$ Time: $15/2$ Unsuccessful, Left FlyerNn ^d Visit: Date $10-8-09$ Time: $12-30$ Unsuccessful, Left FlyerNrd Visit: DateTime:Time:UnsuccessfulN	Vot Admitted □ Other Vot Admitted □ Other Not Admitted □ Other
Have any of the following problems occurred?	
Flooded Basement 🗶 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆	
Comments: THEY USE 4 PORTIBLE SUMP PUMPS DISHEHARGED OUT	- BULKEDD TO BACK HARD
Is there a basement? Full Basement/X Crawl Space □ Slab Floor □ Dirt Floor □ Comm	nents:
Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance Fro	m Floor D Below Floor Level D
Pipe Material: Cast Iron D PVC D Clay D Other	
Comments:	
.s there a Sump Pump? Yes Ø No □	
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface	Cannot Locate
Unknown D Other	
Comments: PORTABLE PUMPS	
Are the following present in the basement to collect water from the floor? (indicate if connected to Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indic	cate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL On	nto Surface
, , , , , , , , , , , , , , , , , , ,	veway Drain 🗆
Comments:	
Water Service Information: Cannot Locate A Above Floor Level 🗆 Distance from Sill Bel	low Floor Level 🛛
Pipe Material: Copper Plastic Iron Lead Other	omments:


NOTE – SEE SKETCH ON BACK

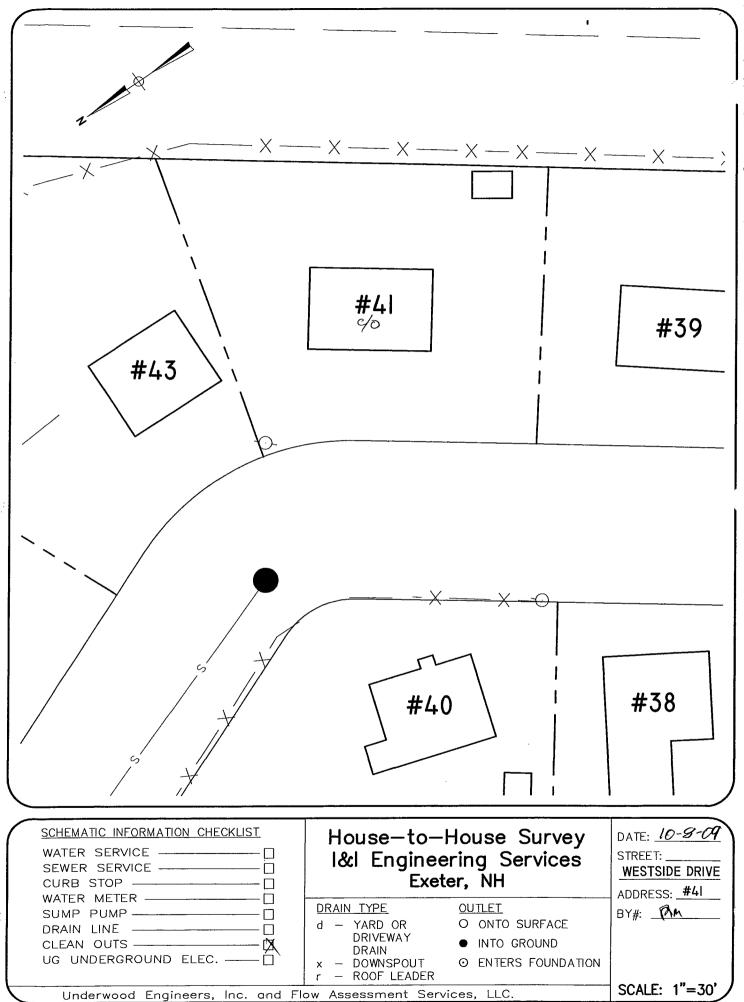

H:ISDSKPROJN: 342LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 10:50:10 AM, rla

I/I Engineering Services Exeter, NH	gerald Roderson	<i>U</i> -		Flow Assessment Services Bedford, NH
Lot # Tax Map #				
Multi Unit Res 🛛 🛛 Single Unit Res 🗙				
Initial Visit: Date $10-6-09$ 2^{nd} Visit: Date Brd Visit: Date	Time: <u>15:15</u> Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted 🗅	Other Other Other
. Have any of the following problems or	courred?			
Flooded Basement Sewage in Base Comments:				
. Is there a basement? Full Basement 🗆	Crawl Space 🗆 Slab	Floor 🗆 Dirt Floor 🗆 Co	mments:	
. Sewer Invert Information? Cannot Lo Above Floor Level – Distance From In Pipe Material: Cast Iron D PVC Comments:	vert to Sill 🗆	Unknown Distance	From Floor 🛛	
	? Sanitary Sewer 🗆 Sep			
Are the following present in the basement Open Clean Out Basement Drain Comments:	□ Open Pipe □ Sum	p Pit 🗆 Recommend Dye	Test 🗆	
Any of the following present outside th Roof Leader (RL) Into Foundation Flat Roof Drain System D Yard Dra Comments:	e building (Put quantity ob RL Into in Window Well Drai	oserved in spaces marked and i Ground <u>O</u> RI in D Stair Well Drain D	Indicate if connecte Onto Surface <u></u> Driveway Drain D	d to sewer)
Water Service Information: Cannot Locate □ Above Floor Leve Pipe Material: Copper □ Plastic		Other	Below Floor Leve	
	 			


NOTE – SEE SKETCH ON BACK

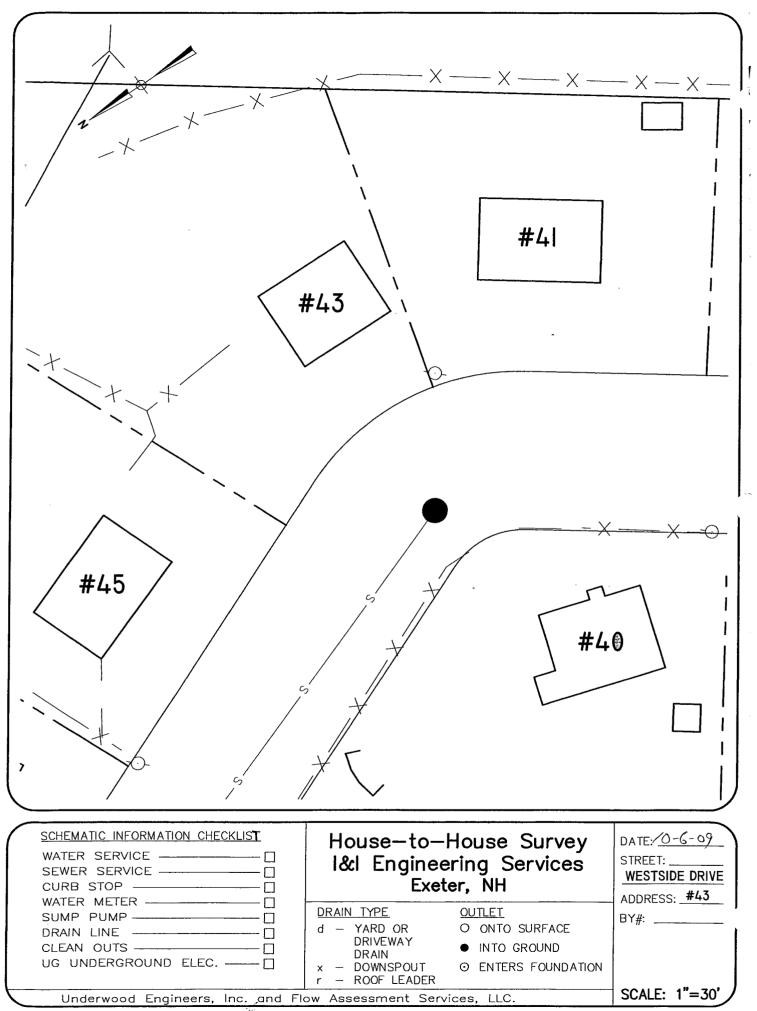

/I Engineering eter, NH	s sei vices	·			Flow Assessment Services Bedford, NH
ot#	Tax Map #	Sub System	Street # <u>45</u>	WESTSIDE OR.	Interviewer RM-RT/RST
		Commercial □ # of Units			l
nitial Visit: Date / 2 nd Visit: Date / 3rd Visit: Date	0-6-09 0-8-09 10-12-09	Time: $\frac{15:22}{12:45}$ Time: $\frac{12:45}{1025}$	Unsuccessful, Left Fly Unsuccessful, Left Fly Unsuccessful	er D Not Admitted	Other Other Other Other
Flooded Basement		aent □ Clogged Pipe □		<u></u>	
		Crawl Space Slab		Comments:	
Pipe Material: Ca Comments:	np? Yes 🗆 No 🗆 he pump discharge? r	Clay 🗆 Other	rate Pipe Out □ Surfa	ce 🗆 Cannot Locat	Below Floor Level
Open Clean Out	Basement Drain □	to collect water from the Open Pipe Sump	Pit Recommend	Dye Test 🛛	
Roof Leader (RL) Li Flat Roof Drain Sys	nto Foundation tem D Yard Drain		round	RL Onto Surface <u>(</u> Driveway Drain	2
Water Service Inform Cannot Locate	nation: Above Floor Level (Distance from Sill		Below Floor Lev	
		<u> </u>			


NOTE – SEE SKETCH ON BACK

•

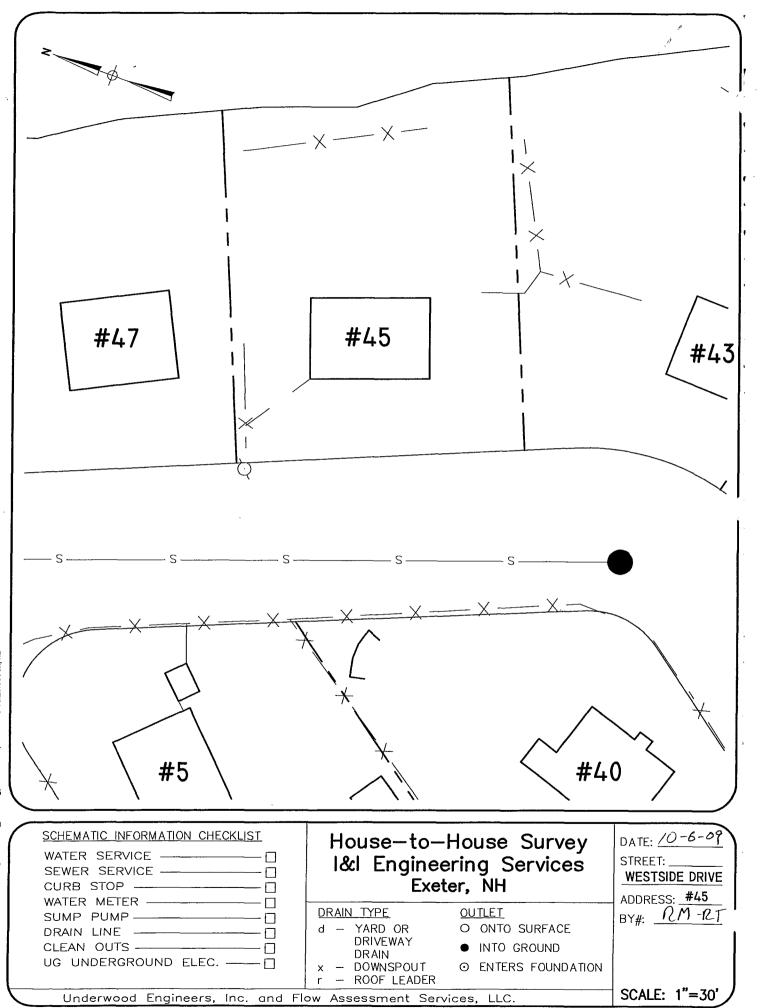

I Engineering Services				Flow Assessment Services Bedford, NH
ot # Tax Map #	Sub System	Street # <u>47</u> w	ESTSIDE DR II	iterviewer RM-RT-RST
Multi Unit Res 🗆 Single Unit Res	Commercial 🗆 # of Uni	ts House Vacar	it 🗆	1
itial Visit: Date (1) $6-09$ 2^{nd} Visit: Date $10-8-09$ 3^{rd} Visit: Date $10-12-09$ $10-13-09$	Time: $\frac{15:20}{12:47}$ Time: $\frac{12:47}{17:30}$	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted 🗆	OtherOtherOther
. Have any of the following problems or	curred?			
Flooded Basement D Sewage in Base	ement 🗆 Clogged Pipe 🗆	Not Known 🛛 Other 🗆 _		
Comments:				
Is there a basement? Full Basement D	/			
. Sewer Invert Information? Cannot Lo	cate 🛛 Distance From B	asement Floor to Sill β	/''	
Above Floor Level – Distance From Inv	vert to Sill	Unknown Distance	From Floor 🛛	Below Floor Level 🕅
Pipe Material: Cast Iron PVC				
Comments:				
` <u></u>				
s there a Sump Pump? Yes No [
If yes, where does the pump discharge?	Sanitary Sewer 🗆 Sep.	arate Pipe Out 🗆 Surface 🕽	Cannot Locate]
Unknown 🛛 Other				
Comments:				
Are the following present in the baseme Open Clean Out Basement Drain				
Comments:		·		
Any of the following present outside the	building (Put quantity ob	served in spaces marked and i	ndicate if connected	to sewer)
Roof Leader (RL) Into Foundation		_/		,
Flat Roof Drain System Vard Drain	ŧ		Driveway Drain 🗆	
Comments:				
Water Service Information: Cannot Locate Above Floor Level	Distance from Sill		Below Floor Level	Ŕ
Pipe Material: Copper 😾 Plastic 🗆	I Iron 🗆 Lead 🗆 (
areral Comments:			·····	

NOTE – SEE SKETCH ON BACK

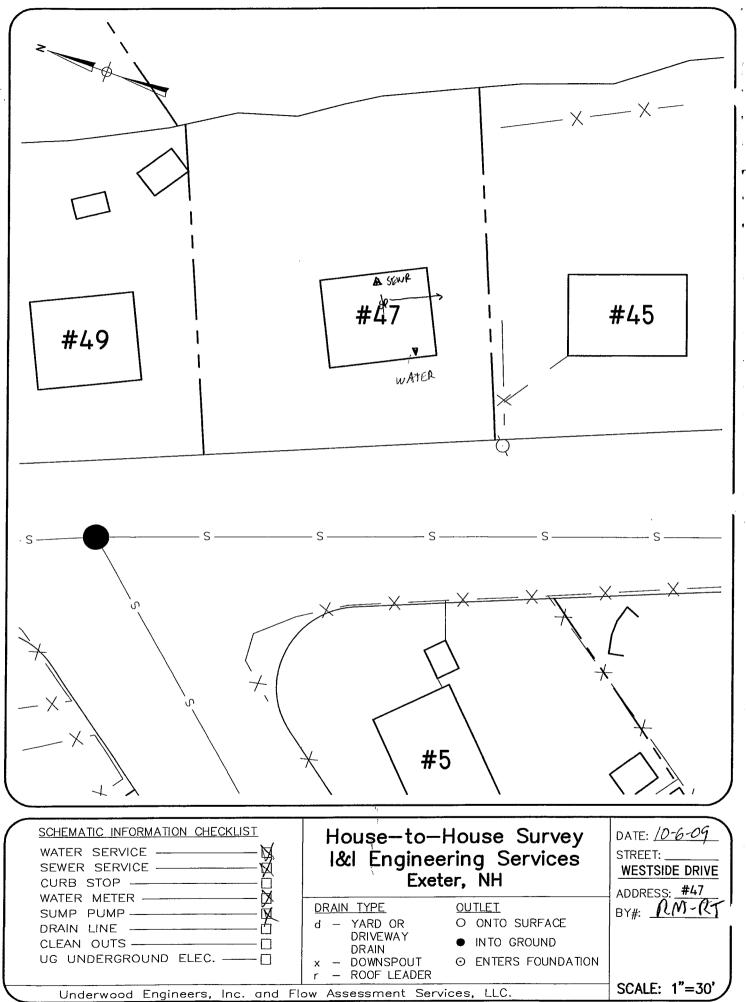


÷, · · ·

H:\SDSKPROJ\. 542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/21/2009 10:27:43 AM, rla

I/I Engine eter, N	eering Services H				Flow Assessment Services Bedford, NH
Lot #	Tax Map #	Sub System	Street # <u>49</u> We	STSIDE DR IT	nterviewer RM-RT
			its House Vacan		
Initial Visit: I 2 nd Visit: I 3rd Visit: I	Date <u>10-6-09</u> Date Date	Time: <u>15:23</u> Time: Time:	Unsuccessful, Left Flyer [] Unsuccessful, Left Flyer [] Unsuccessful	Not Admitted 🛛	Other Other Other
1. Have any of	f the following problems of	occurred?			
	1			·	
2. Is there a bas	sement? Full Basement	🛛 Crawl Space 🗆 Sla	b Floor 🗆 🛛 Dirt Floor 🗆 Co	omments:	· · ·
3. Sewer Invert	t Information? Cannot I	Locate Distance From 1	Basement Floor to Sill 83) ?t)	
Above Floor	·Level – Distance From I	nvert to Sill 🗆	Unknown Distance	From Floor 🛛	Below Floor Level
					÷ ,
	1				
		·····		<u></u>	
	mp Pump? Yes 🗆 No				
			parate Pipe Out □ Surface □		
Unknown 🗆	Other	- <u> </u>			
Comments: _					
			ne floor? (indicate if connected np Pit Recommend Dye 7		
Comments: _					
•			bserved in spaces marked and i		,
RoofLeader	(RL) Into Foundation	O RL Into	Ground RL	, Onto Surface()
Flat Roof Dr	ain System 🛛 🛛 Yard Dra	ain 🛛 🛛 Window Well Dra	in 🗆 Stair Well Drain 🗆	Driveway Drain 🛛	
Comments: _					
. Water Service Cannot Locate	e Information: e 🛯 Above Floor Lev	rel □ Distance from Sill		Below Floor Level	X
Pipe Material	: Copper	□ Iron □ Lead □			`
	'				·····
contar Continuor					


NOTE – SEE SKETCH ON BACK

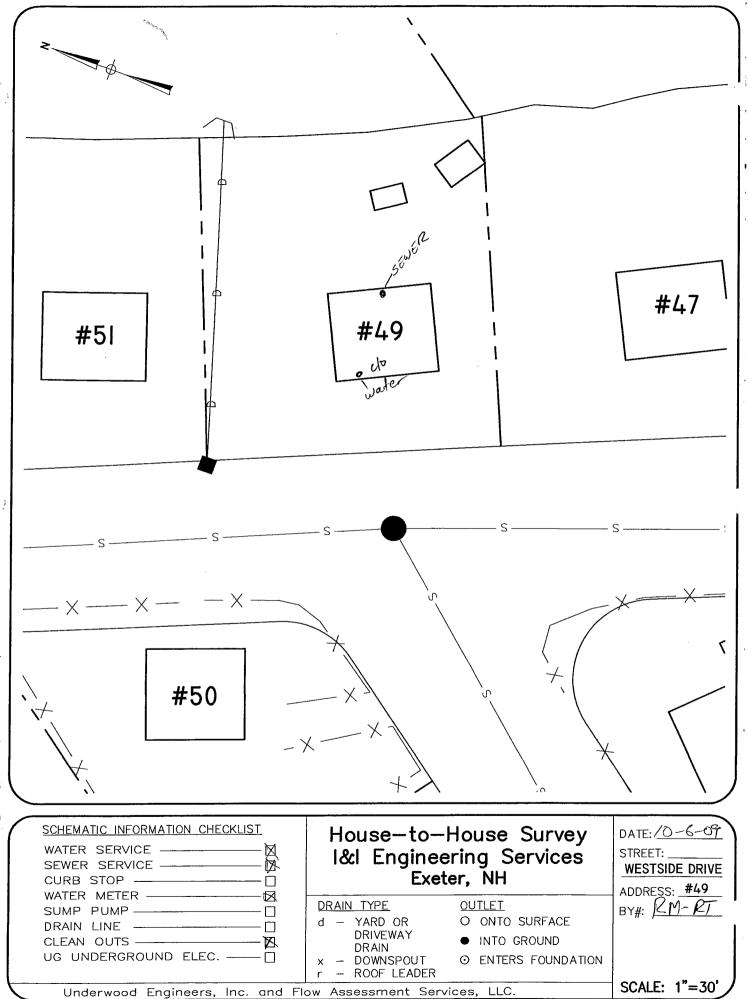


/I Engineering Services ?ter, NH			Flow Assessment Service Bedford, NH
Lot # Tax Map #	Sub System	Street # <u>50</u> Wi	STSIDE DR Interviewer RM - RT
Aulti Unit Res 🗆 Single Unit Res 🕅	Commercial □ # of Units	House Vacant	
			Not Admitted Other
. Have any of the following problems o	ccurred?		
Flooded Basement 🛛 Sewage in Bas	ement 🗆 Clogged Pipe 🗆	Not Known 🕅 Other 🗆	
	Crawl Space □ Slab F	Floor 🗆 🛛 Dirt Floor 🗆 Co	mments:
. Sewer Invert Information? Cannot La	ocate Distance From Bas	sement Floor to Sill 82	2 l) >
Above Floor Level – Distance From In	vert to Sill 🗆	Unknown Distance I	From Floor 🛛 🔹 Below Floor Level
			· · · · ·
1			
	Sanitary Sewer □ Separa		Cannot Locate 🗆
Are the following present in the basem Open Clean Out Basement Drain Comments:	□ Open Pipe □ Sump I	Pit 🗆 Recommend Dye T	est 🗆
Any of the following present outside th	e building (Put quantity obse	rved in spaces marked and ir	dicate if connected to sewer)
Roof Leader (RL) Into Foundation	O RL Into Gr	ound <u>O</u> RL	Onto Surface
Flat Roof Drain System 🗆 Yard Drai	n 🗆 Window Well Drain	□ Stair Well Drain □]	Driveway Drain 🗆
Water Service Information:	l □ Distance from Sill		Below Floor Level
Pipe Material: Copper A Plastic	Iron 🗆 Lead 🗆 Ot		Comments:
víeral Comments:			

NOTE – SEE SKETCH ON BACK

.

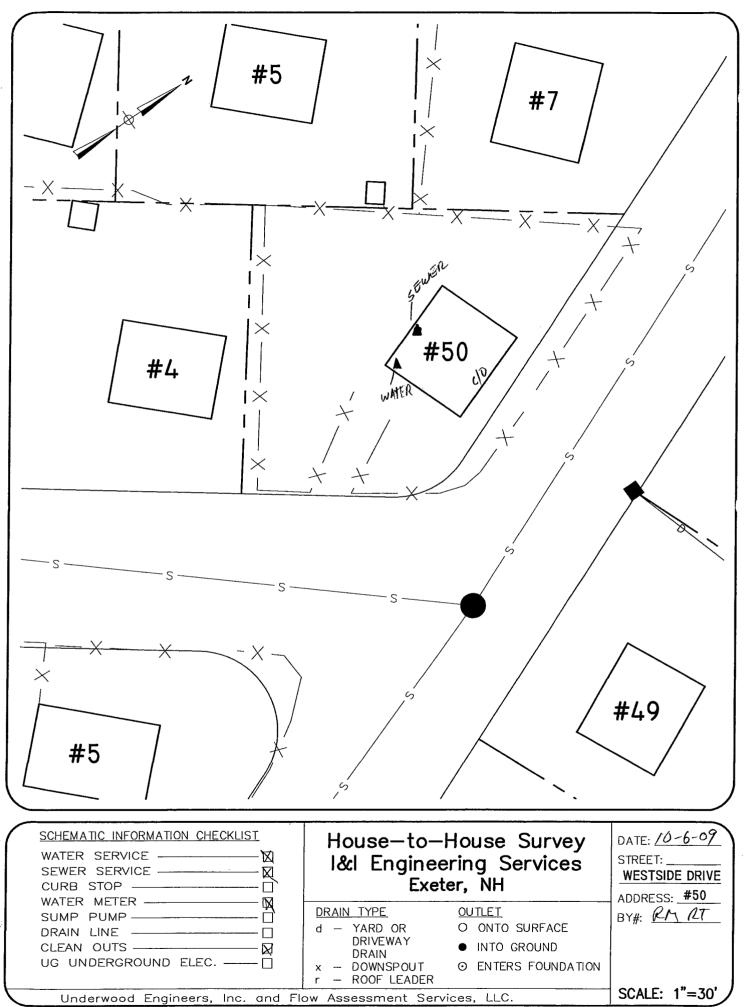

I/I Engineerin Fxeter, NH	g Services				Flow Assessment Services Bedford, NH
Lot #	Tax Map #	Sub System	Street #_5/	ESTSIDE DRINT	erviewer <u>RM-RT</u>
Multi Unit Res 🛙	Single Unit Res	Commercial □ # of Uni	ts House Vacar	nt 🗋	
Initial Visit: Date 2 nd Visit: Date 3rd Visit: Date	10-6-09	Time: <u>15:50</u> Time: Time:	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted 🛛	Other Other Other
I. Have any of the fo	bllowing problems o	ccurred?			
2. Is there a basemen	t? Full Basement	Crawl Space 🗆 Slai	5 Floor 🗆 Dirt Floor 🗆 C	omments:	
Above Floor Leve Pipe Material: C	l – Distance From In Cast Iron □ PVC	vert to Sill		From Floor 🛛	Below Floor Level 🛛
If yes, where does	ner	? Sanitary Sewer 🗆 Sep	oarate Pipe Out □ Surface □		
Open Clean Out	Basement Drain	🗆 Open Pipe 🗆 Sun	ne floor? (indicate if connecte np Pit 🗆 Recommend Dye	Test 🗆	· · · · · · · · · · · · · · · · · · ·
Roof Leader (RL) Flat Roof Drain S	Into Foundation ystem □ Yard Dra	RL Into	bserved in spaces marked and Ground <u> </u>	L Onto Surface(Driveway Drain 🗆	
. Water Service Info Cannot Locate □ Pipe Material: C	Above Floor Lev		Other	Below Floor Level Comments:	
NOTE – SEE SKET(CH ON BACK				

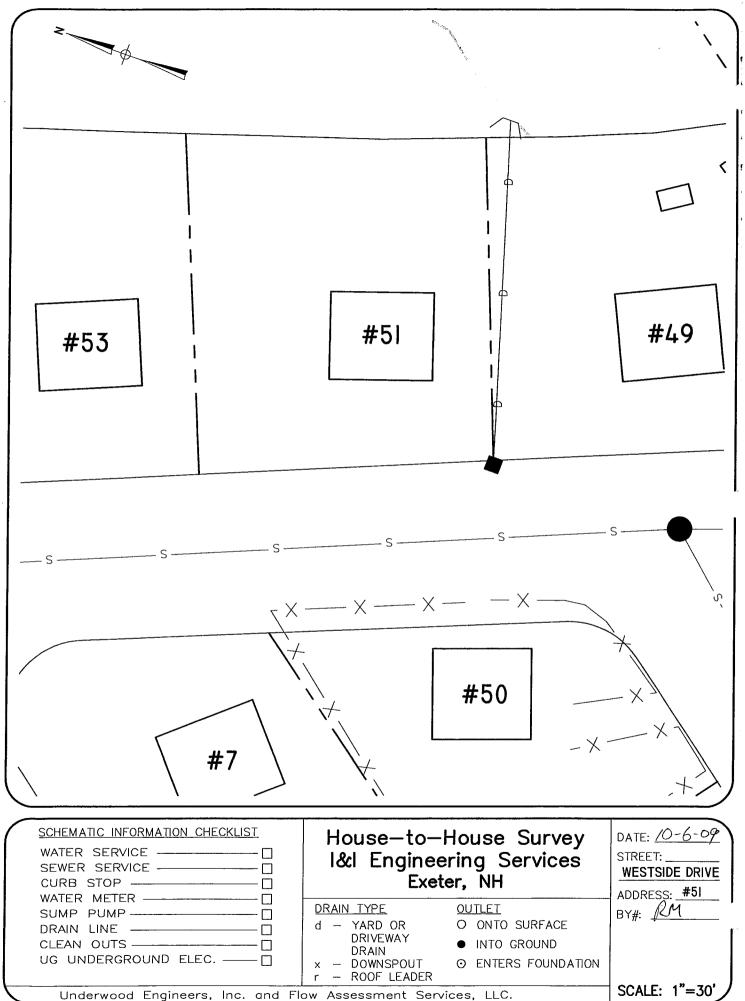


H:\SDSKPROJ\i 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 10:25:31 AM, rla

[/I Engineering Services ^{T-}eter, NH

r

Flow Assessment Services Bedford, NH

Lot#	Tax Map # Sub System Street # 53 WESTSINE DR Interviewer RM - RT
Multi Unit Res 🛛	Single Unit Res 🖄 Commercial 🗆 # of Units House Vacant 🗆
Initial Visit: Date 2 nd Visit: Date 3rd Visit: Date	16-6-04 Time: 15:52 Unsuccessful, Left Flyer Not Admitted Other 10-8-09 Time: 12:50 Unsuccessful, Left Flyer Not Admitted Other 10-8-09 Time: 10:50 Unsuccessful, Left Flyer Not Admitted Other 10-8-09 Time: 10:00 Unsuccessful, Left Flyer Not Admitted Other
Flooded Basemer	following problems occurred? nt A Sewage in Basement Clogged Pipe Not Known Clother Clogged Pipe Clother Clogged Pipe Clother Clother Clogged Pipe Clother Cl
Comments: <u>SPU</u>	OP VAC IS USED TO REMOVE WATER
2. Is there a basement	nt? Full Basement 🗶 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 Comments:
3. Sewer Invert Info	rmation? Cannot Locate 🗆 Distance From Basement Floor to Sill
Pipe Material: 0	el – Distance From Invert to Sill Unknown Distance From Floor Below Floor Level
there a Sump P	rump? Yes 🗆 No 🕅
-	s the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface 🗆 Cannot Locate 🗆
	her
Are the following Open Clean Out	present in the basement to collect water from the floor? (indicate if connected to sewer) Basement Drain Open Pipe Sump Pit Recommend Dye Test
Any of the followi	ing present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer)
÷	Into Foundation RL Into Ground RL Onto Surface
Flat Roof Drain S	ystem 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆 Driveway Drain 🗅
<u></u>	
Water Service Info Cannot Locate	Above Floor Level 🗆 Distance from Sill Below Floor Level
Pipe Material: C	Coppet Plastic I Iron I Lead I Other Comments:
.éral Comments:	
OTE – SEE SKETC	CH ON BACK

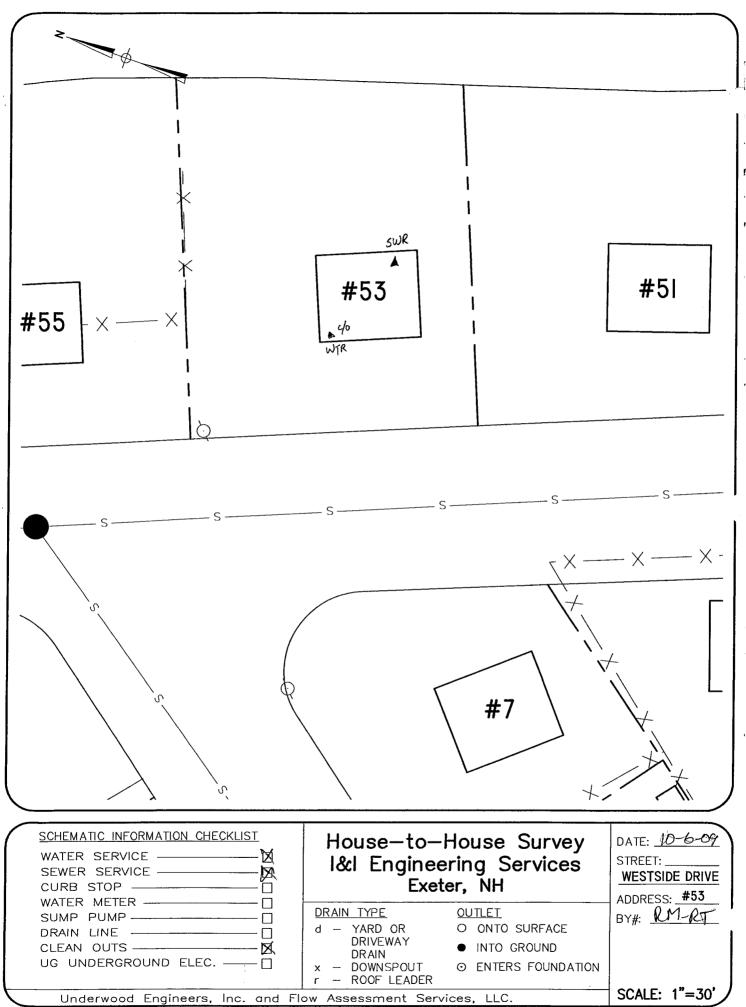


H:\SDSKPROJ\\. 542LDD\dwg\EXETER_G(S.dwg, HSE2HSE, 5/21/2009 10:24:21 AM, rla

/I Engineering Services F ¬ter, NH			Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # <u>55</u> WES	TSIDE DR Interviewer RM-RT
Multi Unit Res 🛛 🛛 Single Unit Res	Commercial 🗆 # of Units	5 House Vacan	t 🛙
Initial Visit: Date $\frac{10-6-69}{10-8-09}$ rd Visit: Date $\frac{10-8-09}{10-12-09}$	Time: <u>15:54</u> Time: <u>12:57</u> Time: <u>1021</u>	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
Comments:	asement 🗆 Clogged Pipe 🗆		
			mments:
Comments:	Invert to Sill C C Clay C Other 0	Unknown Distance I	From Floor Below Floor Level
Comments:		-	
Are the following present in the baser Open Clean Out Basement Drain Comments:	ı □ Open Pipe □ Sump	Pit 🗆 Recommend Dye T	°est □
Any of the following present outside r Roof Leader (RL) Into Foundation Flat Roof Drain System D Yard Dr	the building (Put quantity obs RL Into G rain	erved in spaces marked and in round RL	ndicate if connected to sewer) Onto Surface
Water Service Information: Cannot Locate Above Floor Le Pipe Material: Copper Plastic			Below Floor Level 🛛
eral Comments:			

.


NOTE – SEE SKETCH ON BACK

ņ

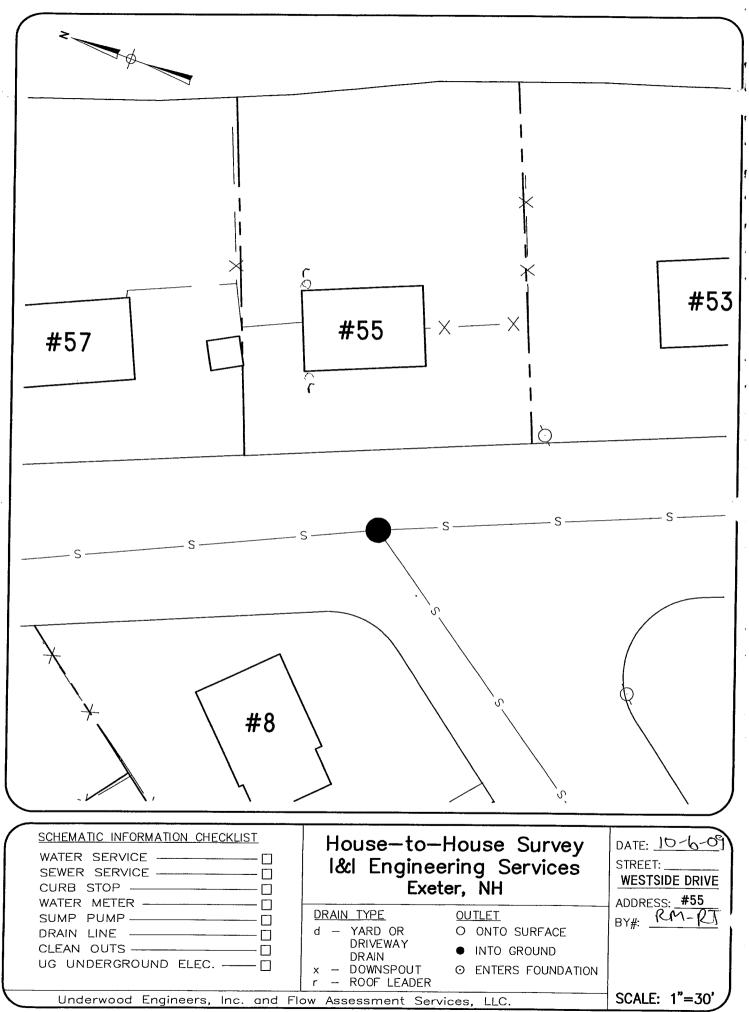

ot #Tax Map #Sub SystemStreet #_ <u>57</u> WESTSIDE DR In ulti Unit Res □ Single Unit Res □ Commercial □ # of UnitsHouse Vacant □ ulti Unit Res □ Single Unit Res □ Commercial □ # of UnitsHouse Vacant □ utial Visit: DateTime:Time:House Vacant □ Unsuccessful, Left Flyer □ Not Admitted □ Visit: DateTime:Time: Insuccessful, Left Flyer □ Not Admitted □ Unsuccessful Not Admitted □ Unsuccessful Not Admitted □ Have any of the following problems occurred? Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known ⊠ Other □ Comments:	Other Other Other
ulti Unit Res Single Unit Res Commercial # of Units House Vacant itial Visit: Date /0-6-09 Time: //6:09 Unsuccessful, Left Flyer Not Admitted Visit: Date	Other Other Other
Have any of the following problems occurred? Flooded Basement □ Sewage in Basement □ Clogged Pipe □ Not Known A Other □ Comments:	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments:	
's there a basement? Full Basement I Crawl Space □ Slab Floor □ Dirt Floor □ Comments:	
Sewer Invert Information? Cannot Locate Distance From Basement Floor to SillAbove Floor Level – Distance From Invert to SillUnknown Distance From Floor Pipe Material: Cast Iron Clay PVC C Clay Other Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface Plat Roof Drain System I Yard Drain I Window Well Drain I Stair Well Drain I Driveway Drain I Comments:	
Vater Service Information: annot Locate Above Floor Level Distance from SillBelow Floor Level pe Material: Copper Plastic Iron Lead OtherComments:	,
ral Comments:	


VOTE -- SEE SKETCH ON BACK

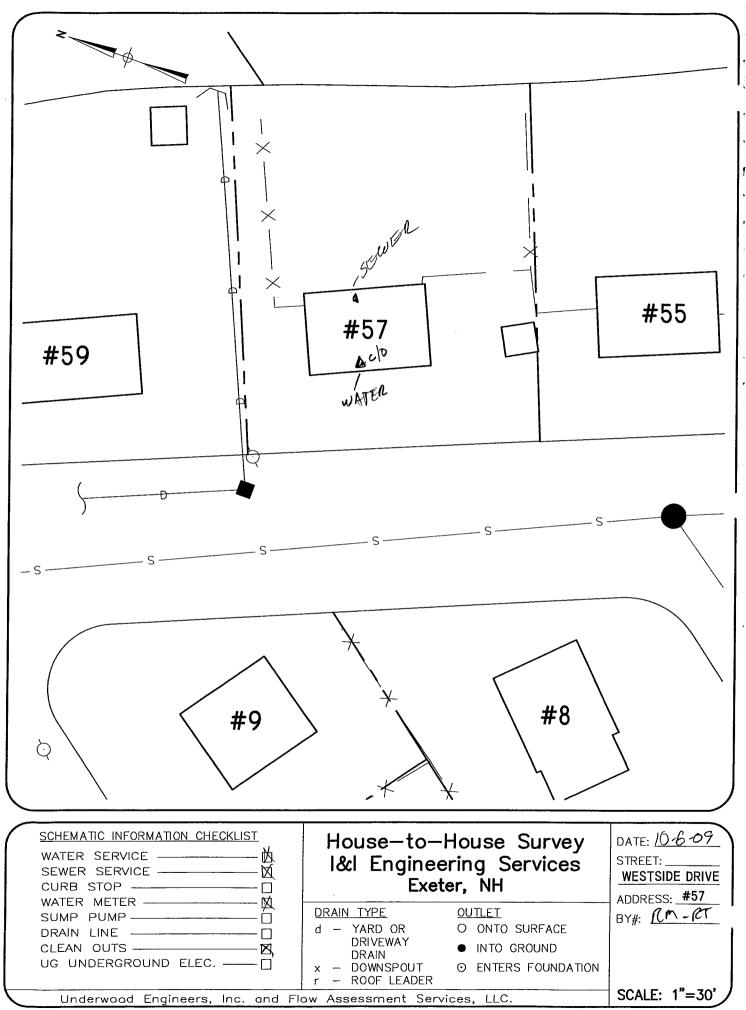

·				Flow Assessment Service Bedford, NH
Lot # Tax Map #		Street # <u>59 WE</u>	SISIDE DR Inte	viewer <u>RM-RT</u>
Multi Unit Res 🗆 Single Unit Res 🖌				
Initial Visit: Date $10-6-09$ 2^{nd} Visit: Date 3^{rd} Visit: Date	Time: Time:	Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🗅 Unsuccessful	Not Admitted () Not Admitted () Not Admitted ()	Other
I. Have any of the following problems oc Flooded Basement □ Sewage in Base Comments:	ement 🛛 Clogged Pipe 🗆	.,		
. Is there a basement? Full Basement	Crawl Space 🗆 Slat	Floor 🗆 Dirt Floor 🗆 Cor	nments:	
Sewer Invert Information? Cannot Lo Above Floor Level – Distance From Inv Pipe Material: Cast Iron PVC Comments:s there a Sump Pump? Yes No If yes, where does the pump discharge? Unknown Other	vert to Sill Clay Other	Unknown Distance H	rom Floor	
				· · · · · · · · · · · · · · · · · · ·
Comments:				
	nt to collect water from the Open Pipe D Sum	e floor? (indicate if connected p Pit Recommend Dye T	to sewer) est 🗆	
Comments:	nt to collect water from the Dopen Pipe D Sum building (Put quantity ob RL Into on D Window Well Drai	e floor? (indicate if connected p Pit \Box Recommend Dye T served in spaces marked and in Ground <u>2</u> RL n \Box Stair Well Drain \Box I	to sewer) est dicate if connected to Onto Surface Driveway Drain	o sewer)
Comments:	nt to collect water from the Dopen Pipe D Sum building (Put quantity ob RL Into on D Window Well Drai	e floor? (indicate if connected p Pit \Box Recommend Dye T served in spaces marked and ir Ground <u>2</u> RL n \Box Stair Well Drain \Box I	to sewer) est dicate if connected to Onto SurfaceO Driveway Drain	o sewer)
Comments:	nt to collect water from the Dopen Pipe D Sum Sum Suilding (Put quantity ob C RL Into of D Window Well Drai	e floor? (indicate if connected p Pit Recommend Dye T served in spaces marked and in Ground 2 RL n Stair Well Drain I	to sewer) est dicate if connected to Onto Surface Driveway Drain Below Floor Level)	D sewer)

NOTE – SEE SKETCH ON BACK

γ.

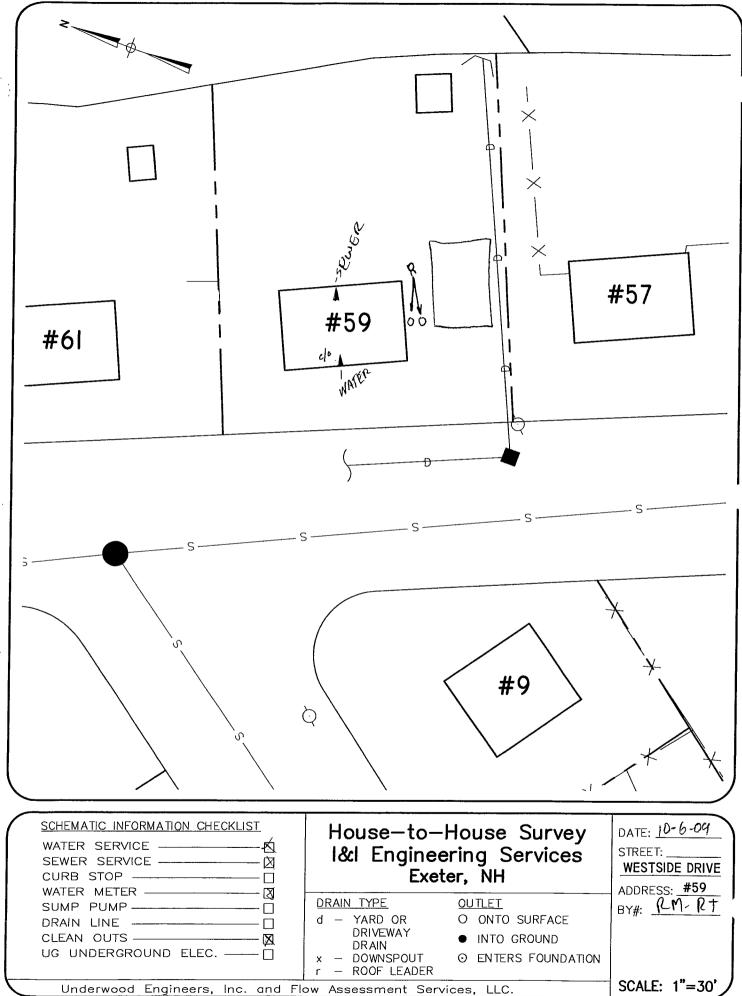


H:\SDSKPROJ(1, ..., 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/2/12009 10:20:51 AM, rla

I/I	Engi	neering	Services
Ex	eter,	NH	

Flow Assessment Services Bedford, NH

Lot # Tax Map # Sub System Street # 61 WESTSIDE DR Interviewer RM-RT
Multi Unit Res 🛛 Single Unit Res 🕑 Commercial 🗆 # of Units House Vacant 🗆
Initial Visit:Date $10-6-09$ Time: $16-20$ Unsuccessful, Left FlyerNot AdmittedOther 2^{nd} Visit:Date $10-8-09$ Time: $12-55$ Unsuccessful, Left FlyerNot AdmittedOther 3^{rd} Visit:Date $10-12-09$ Time: $10-3$ UnsuccessfulNot AdmittedOther
 Have any of the following problems occurred? Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments:
2. Is there a basement? Full Basement & Crawl Space Slab Floor Dirt Floor Comments:
3. Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill <u>SG</u> . Above Floor Level – Distance From Invert to Sill Unknown Distance From Floor Below Floor Level Pipe Material: Cast Iron PVC CLAY Other Comments:
5. Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments: <u>Capped Clean out</u>
6. Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer) Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface Flat Roof Drain SystemYard Drain Window Well Drain Stair Well Drain Driveway Drain Comments:
7. Water Service Information: Cannot Locate Above Floor Level Distance from SillBelow Floor Level Pipe Material: Copper Plastic Iron Lead OtherComments:
Coneral Comments:
NOTE – SEE SKETCH ON BACK

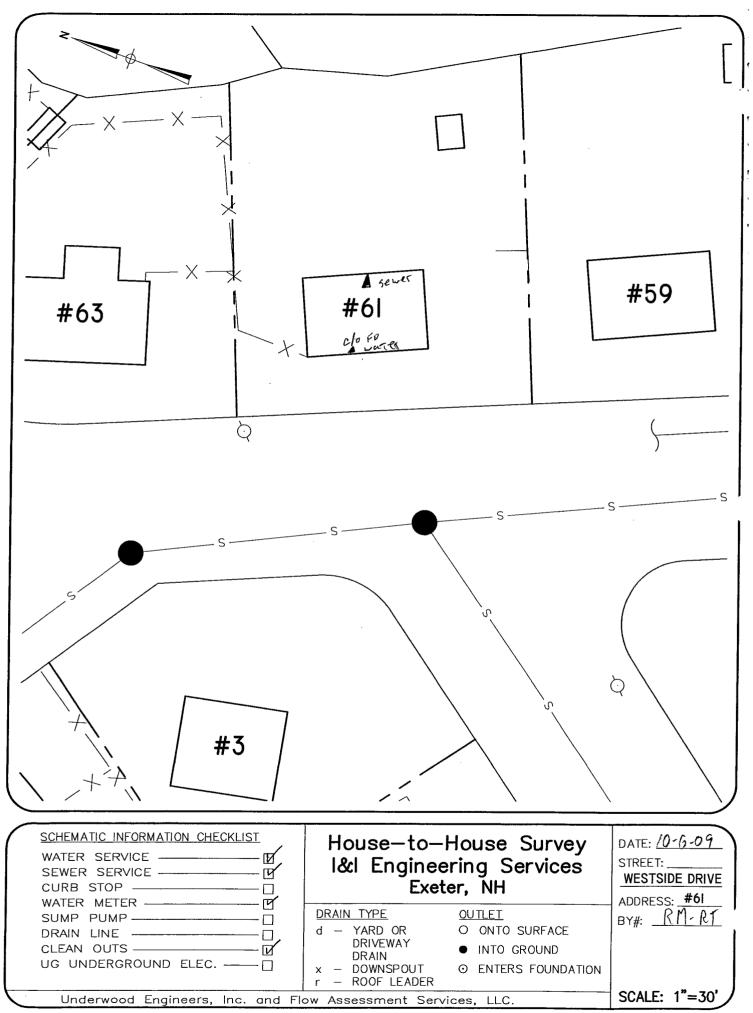


H:\SDSKPROJV. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 10:19:54 AM, rla

UNISE SUDVEV

// Engineering Services		<u>UUSE SURVEY</u>		Flow Assessment Services Bedford, NH
Lot # Tax Map #		Street # 63- W	ESTSIDE DR_Inte	rviewer <u>RM</u> - RT
Multi Unit Res 🗆 Single Unit Res 🎽 Comr		House Vacant		
Initial Visit: Date $\frac{10-6-09}{10-8-09}$ Time 2^{nd} Visit: Date $\frac{10-8-09}{10-8-09}$ Time $3rd$ Visit: Date $\frac{10-8-09}{10-12-09}$ Time	: 16:27 : 12:57 : 1000	,,	Not Admitted D	Other Other Other
1. Have any of the following problems occurred? Flooded Basement D Sewage in Basement D Comments:	Clogged Pipe 🗆		<u> </u>	
2. Is there a basement? Full Basement Cra				
Above Floor Level – Distance From Invert to S Pipe Material: Cast Iron PVC C Comments:	lay □ Other	ate Pipe Out 🛛 Surface 🗆	Cannot Locate 🛙	
Are the following present in the basement to cc Open Clean Out Basement Drain Op Comments:	ollect water from the : ben Pipe □ Sump	floor? (indicate if connected Pit □ Recommend Dye T	to sewer) est □	· · · · · · · · · · · · · · · · · · ·
Any of the following present outside the buildir Roof Leader (RL) Into Foundation	RL Into G	round RL	Onto Surface <u>3</u> Driveway Drain 🛛	
Water Service Information: Cannot Locate Above Floor Level Dist Pipe Material: Copper Plastic I Irc	tance from Sill]	Below Floor Level	۵
reral Comments: House appeals To				

NOTE – SEE SKETCH ON BACK


į.

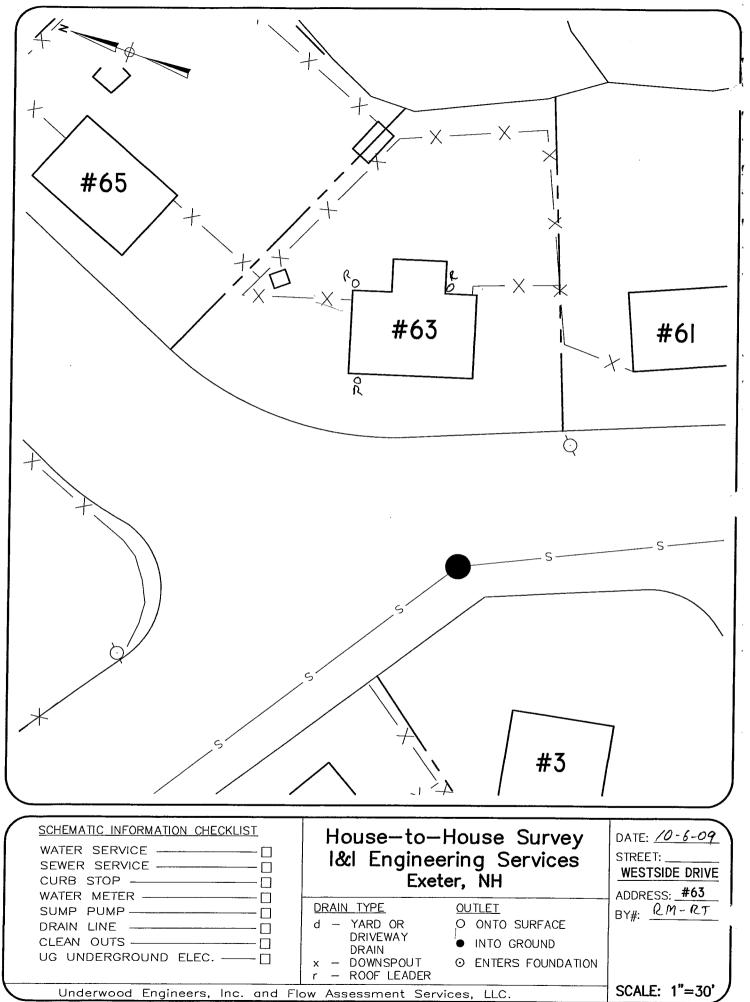

.

Flow Assessment Services Bedford, NH


Lot # Tax Map # Sub System Street # 65 WESTSIDE DE Interviewer RM-RT-RS
`Aulti Unit Res □ Single Unit Res 🛛 Commercial □ # of Units House Vacant □
Initial Visit: Date $/0-6-09$ Time: $/6-30$ Unsuccessful, Left FlyerNot AdmittedOther 2^{nd} Visit: Date $10-8-09$ Time: $/2-59$ Unsuccessful, Left FlyerNot AdmittedOther rd Visit: Date $10-12-09$ Time: $/2-59$ Unsuccessful, Left FlyerNot AdmittedOther $10-13-09$ 7715 7715 $Not Admitted$ Not AdmittedOther
1. Have any of the following problems occurred?
Flooded Basement 🗆 Sewage in Basement 🗆 Clogged Pipe 🗆 Not Known 🗆 Other 🗆
Comments:
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comments:
. Sewer Invert Information? Cannot Locate D Distance From Basement Floor to Sill
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance From Floor 🗆 Below Floor Level 🗆
Pipe Material: Cast Iron D PVC D Clay D Other
Comments:
→ there a Sump Pump? Yes □ No □
If yes, where does the pump discharge? Sanitary Sewer \Box Separate Pipe Out \Box Surface \Box Cannot Locate \Box
Unknown Other
Comments:
 Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out □ Basement Drain □ Open Pipe □ Sump Pit □ Recommend Dye Test □
Comments:
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface
Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Drain
Comments:
7. Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level □
Pipe Material: Copper 🗆 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments:
eral Comments: Denied Access by home owner
NOTE – SEE SKETCH ON BACK

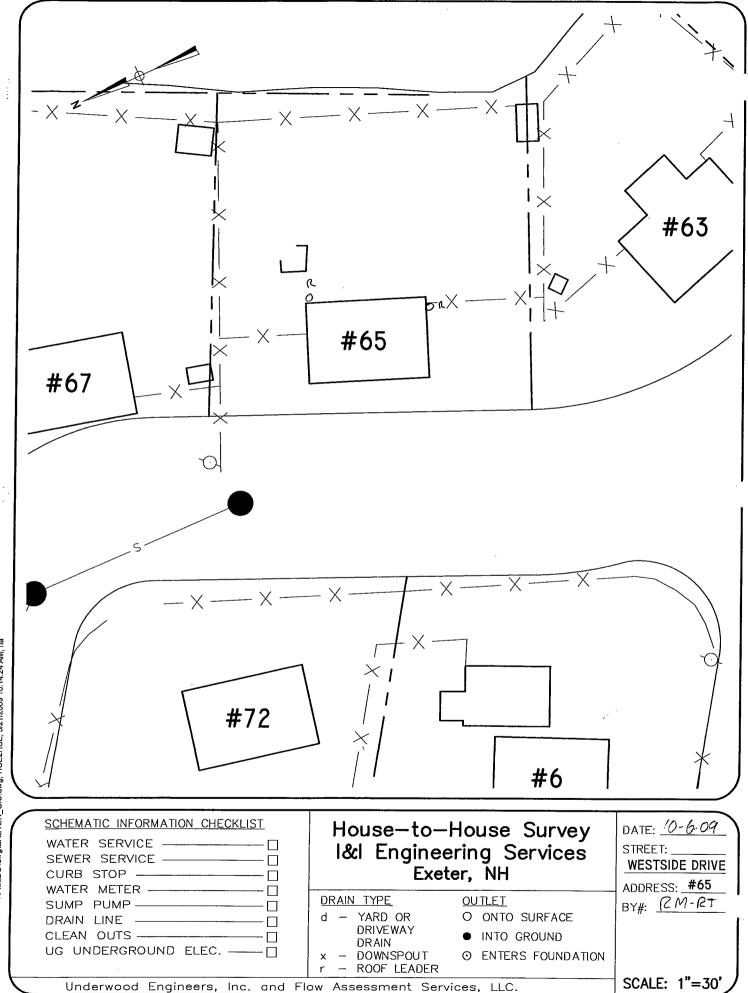

H:\SDSKPROJ\i 542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/2//2009 10:14:24 AM, rla

/I Engineering Services	Flow Assessment Services Bedford, NH
	TSide DF Interviewer RST/RM
Tulti Unit Res 🗆 Single Unit Res 🕼 Commercial 🗆 # of Units House Vacant	
itial Visit:Date $10 - 7 - 09$ Time: 1320 Unsuccessful, Left FlyerImade Visit:Date $10 - 8 - 09$ Time: $13:03$ Unsuccessful, Left FlyerInd Visit:DateTime: $13:03$ Unsuccessful	Not Admitted Other Other Not Admitted Other Not Admitted Other Other
. Have any of the following problems occurred?	
Flooded Basement D Sewage in Basement D Clogged Pipe D Not Known D Other D	
Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Con	mments:
Sewer Invert Information? Cannot Locate 🗆 Distance From Basement Floor to Sill	
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance F	from Floor 🛛 🛛 Below Floor Level 🗆
Pipe Material: Cast Iron 🗆 PVC 🗆 Clay 🗆 Other	
Comments:	
→s there a Sump Pump? Yes □ No □	
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface	Cannot Locate 🗆
Unknown Other	
Coniments:	
Are the following present in the basement to collect water from the floor? (indicate if connected Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Te	
Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and in	dicate if connected to sewer)
Roof Leader (RL) Into Foundation 6 RL Into Ground 7 RL (,
Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain E	
Comments:	
Water Service Information: Cannot Locate Above Floor Level Distance from Sill F	Below Floor Level
Pipe Material: Copper Plastic Iron Lead Other	Comments:
eral Comments: Denirce Access by occupant.	
Commenter provide incless vy becapacitie	


VOTE - SEE SKETCH ON BACK

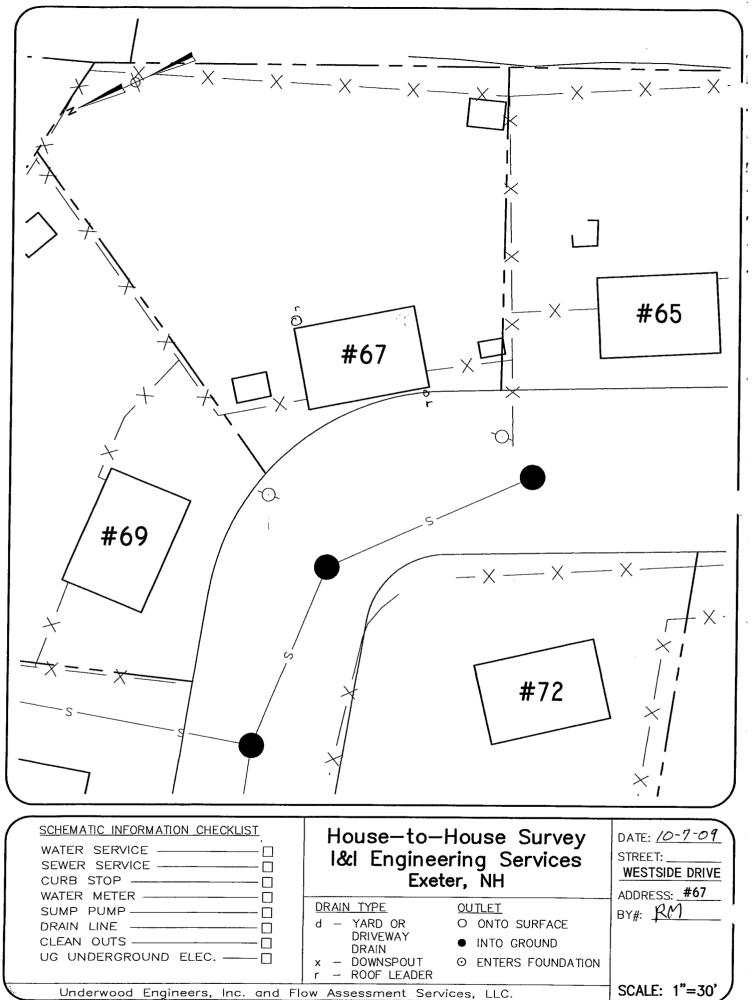

/I Engineering Services			Flow Assessment Services Bedford, NH
	Sub System	Street # 69 we	STSIDE DF_ Interviewer RST/RM
Iulti Unit Res 🗆 Single Unit Re	es 🕼 Commercial 🗆 # of Units	House Vacant	. D
nitial Visit: Date $10 - 7 - 66$ 10 - 7 - 66 10 - 8 - 69 10 - 8 - 69	Time: 1325 Time: 13:15 Time: 13:15	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of the following proble	ms occurred?		
Flooded Basement 🛛 Sewage in	a Basement 🗆 Clogged Pipe 🗆	Not Known 🗆 Other 🗆	
Comments: <u>Sumppy</u>	Mps Take Care a	of problem	
			mments: FINNISHED BASEMENT
. Sewer Invert Information? Canr	ot Locate 🕱 Distance From Ba	sement Floor to Sill	
Above Floor Level – Distance Fro	m Invert to Sill 🗆	Unknown Distance F	from Floor 🛛 🛛 Below Floor Level 🗆
Pipe Material: Cast Iron D	PVC 🗆 Clay 🗆 Other		•
Comments:			
			· · · · · · · · · · · · · · · · · · ·
.s there a Sump Pump? Yes 🗙			
If yes, where does the pump disch		-	
Unknown 🕅 Other			
Comments: <u>SPUMPS</u>			
Are the following present in the ba Open Clean Out Basement D	rain 🗆 Open Pipe 🗆 Sump	Pit 🛛 Recommend Dye To	est 🗆
Any of the following present outsi	le the building (Put quantity obse	erved in spaces marked and in	dicate if connected to sewer)
Roof Leader (RL) Into Foundation	n RL Into G	round RL	Onto Surface]
Flat Roof Drain System 🗆 Yard		/	
Water Service Information: Cannot Locate 🗆 Above Floor			
			Comments:
eral Comments:			······································
	· · · · · · · · · · · · · · · · · · ·		


NOTE – SEE SKETCH ON BACK

^

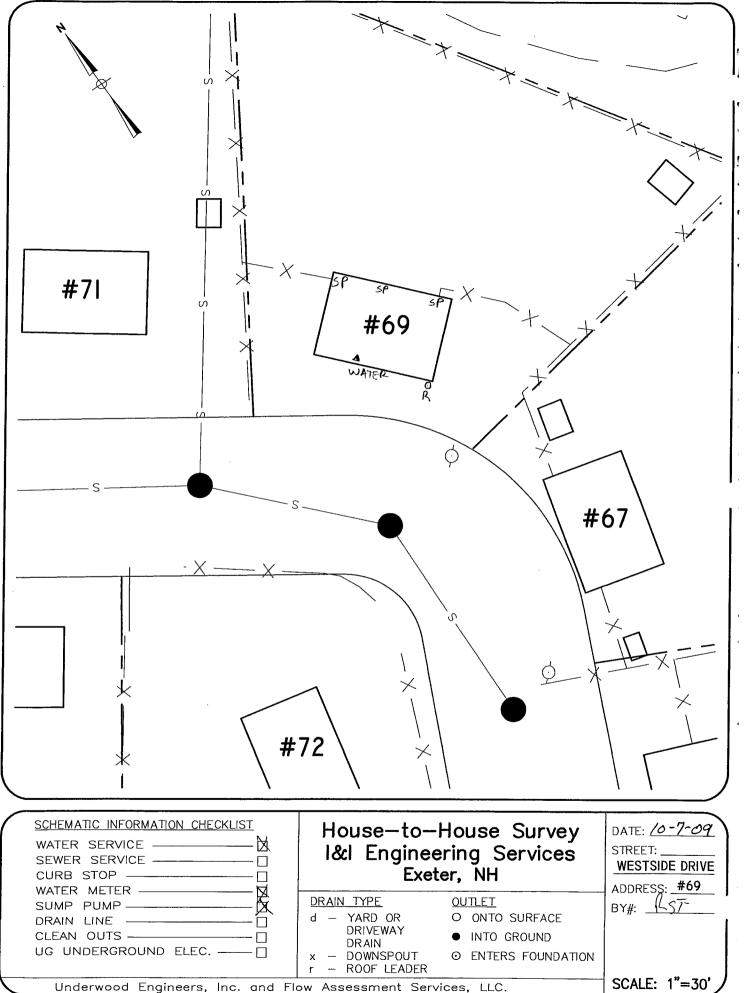

H:\SDSKPROJV 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 10:09:39 AM, rla


I/I Enginee Fxeter, NH	ering Services I			Flow Assessment Se Bedford, NH	rvices
Lot #	Tax Map #	Sub System	Street # 71 60	STSIDE DE Interviewer RST	
Multi Unit Res	□ Single Unit Res 🗗	Commercial 🗆 # of Ur	nits House Vacan	t 🗆	
Initial Visit: Da 2 nd Visit: Da 3rd Visit: Da	ate <u>10-7-09</u> ate	Time: <u>13 29</u> Time: Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other	
1. Have any of t	the following problems o	ccurred?			
Flooded Base	ement 🛛 Sewage in Bas	ement Clogged Pipe	□ Not Known □ Other □ _		
				Τι	
				omments:	
3. Sewer Invert	Information? Cannot L	ocate 🗆 Distance From	Basement Floor to Sill	1,	
Above Floor	Level – Distance From Ir	vert to Sill 🗆 💡	Unknown Distance	From Floor D Below Floor Level	/
Pipe Material	: Cast Iron D PVC	□ Clay □ Other _			
If yes, where Unknown □	Other	? Sanitary Sewer 🗆 So			
Comments: _	ouver sta	Tes That Both	Sumps used TO 1	re tital into sewel.	
Open Clean (Out 🗆 Basement Drain	□ Open Pipe □ Su	the floor? (indicate if connecte mp Pit Recommend Dye	d to sewer) Test □	
-			observed in spaces marked and		
Roof Leader	(RL) Into Foundation	RL Int	o Ground R	L Onto Surface	
Flat Roof Dra	ain System 🗆 🛛 Yard Dr	ain 🗆 Window Well Di	rain 🗆 Stair Well Drain 🗆	Driveway Drain 🗆	
7. Water Service	e Information:	<u>, s.</u> <u>.</u> , <u>.</u>	<u> </u>	/	
Cannot Locate	,				
Pipe Material:	Copper 🗹 Plastic		Other	Comments:	
ineral Commer	nts:				
	- <u></u>				
NOTE – SEE SI	KETCH ON BACK				

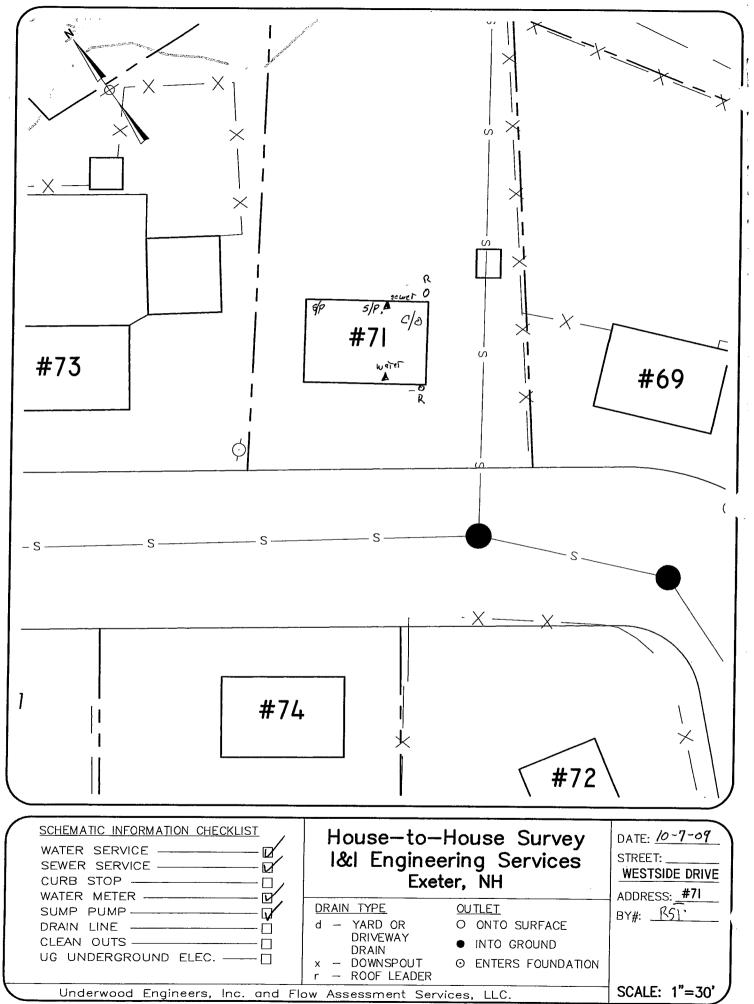

.542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 10:08:23 AM, rla H:\SDSKPROJ\.

Freter, NH	ring Services					ssessment Services rd, NH
Lot #	Tax Map #	Sub System	Street #_ 72 w	estside Dr.	_ Interviewer	RST/RM
			ts House Vac			Z
Initial Visit: Da 2 nd Visit: Da 3rd Visit: Da	te $\frac{10 - 7 - 09}{10 - 9 - 09}$ te $\frac{10 - 9 - 09}{10 - 9 - 09}$	Time: 13:21 Time: <u>/3:03</u> Time:	Unsuccessful, Left Flyer I Unsuccessful, Left Flyer I Unsuccessful	Not Admitter Not Admitter Not Admitte	d Other d Other d Other	
. Have any of tl	he following problems oc	curred?				
Flooded Baser	ment 🕅 Sewage in Base	ment 🛛 Clogged Pipe 🗆	Not Known 🛛 Other 🗆			
Comments: <u>\</u>	ISES SHOP VAC	TO REMOVE WA	TER	·		
. Is there a base	ment? Full Basement	Crawl Space 🗆 Slab	Floor 🛛 Dirt Floor 🗆 🤇	Comments:		
. Sewer Invert I	nformation? Cannot Loc	cate 🗆 Distance From B	asement Floor to Sill 8	2*		
Above Floor L	evel – Distance From Inv	ert to Sill 🗆	Unknown Distanc	e From Floor 🛛	Below	Floor Level 🗴
						/ \
	,					
<u>-</u>	~			<u> </u>		
i there a Sum	p Pump?YesX No 🗆					
If yes, where d	loes the pump discharge?	Sanitary Sewer 🗆 Sepa	arate Pipe Out 🗆 Surface	Cannot Loca	ate 🗆	
Unknown 🕅	Other PUMPS DC	INT WORK	······································			
Comments: <u>S</u>	UMP PUMPS AT	LE NUT HOOKI	ED UP TO ANY T	HING /OLS) PUMPS	· · · · · · · · · · · · · · · · · · ·
	· · · · · · · · · · · · · · · · · · ·			/	·	
			e floor? (indicate if connect p Pit A Recommend Dye			
			F			
					· · · · · · · · · · · · · · · · · · ·	
Any of the follo	owing present outside the	building (Put quantity ob	served in spaces marked and	l indicate if conn	ected to sewer)	
Roof Leader (H	RL) Into Foundation	Ø RL Into (Ground F	L Onto Surface	2	
			n 🗆 Stair Well Drain 🗆			
	-			-	_	
			······································			
Water Service I Cannot Locate		□ Distance from Sill		Below Floor L	evel 📈	
Pipe Material:	_		Other		•)	
<u> </u>						
.eral Comments						

NOTE - SEE SKETCH ON BACK

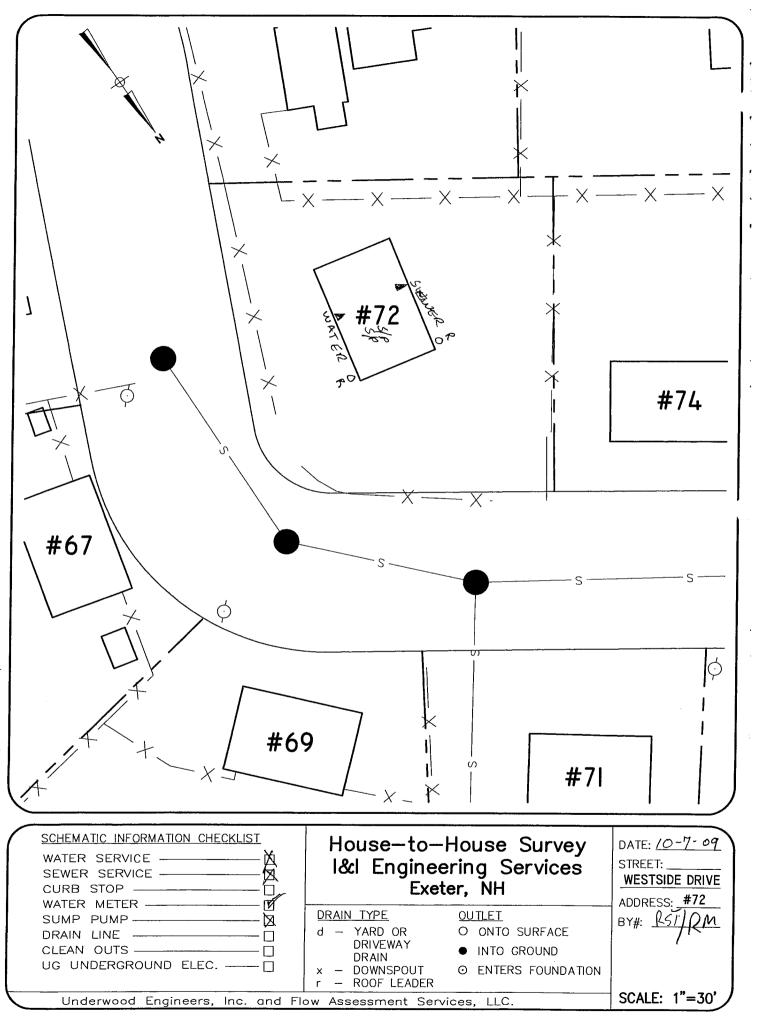


H:\SDSKPROJ\. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 1:48:53 PM, rla

HOU	SE	SU	R	VEY


I Engineering Services F ter, NH	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # <u>73 we</u>	stside Dr. Interviewer RST
'iulti Unit Res 🛛 Single Unit Res 🕼 Commercial 🗆 # of Units House Vacar	
Initial Visit: Date 10-7-09 Time: 1336 Unsuccessful, Left Flyer □ 2 nd Visit: Date Time: Unsuccessful, Left Flyer □ :d Visit: Date Time: Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
1. Have any of the following problems occurred?	
Flooded Basement 🗗 Sewage in Basement 🗆 Clogged Pipe 🗅 Not Known 🗆 Other 🗅 _	
Comments: <u>Sump</u> was parin.	
2. Is there a basement? Full Basement & Crawl Space Slab Floor Dirt Floor Co	
. Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	S/ ''
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance	_
Pipe Material: Cast Iron 🕑 PVC 🗆 Clay 🗆 Other	
Comments:	
there a Sump Pump? Yes D No 🗆	
If yes, where does the pump discharge? Sanitary Sewer 🗹 Separate Pipe Out 🗆 Surface 🗆	Cannot Locate 🗆
Unknown 🗆 Other	
Comments:	
Are the following present in the basement to collect water from the floor? Andicate if connected Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye	
Comments: <u>Clear out is cappel</u> .	
Any of the following present outside the building (Put quantity observed in spaces marked and i	indicate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RL	Onto Surface
1	Driveway Drain 🗆
Comments:	
Water Service Information:	Below Floor Level
Pipe Material: Copper & Plastic Iron Lead Other	Comments:
areral Comments:	

NOTE - SEE SKETCH ON BACK

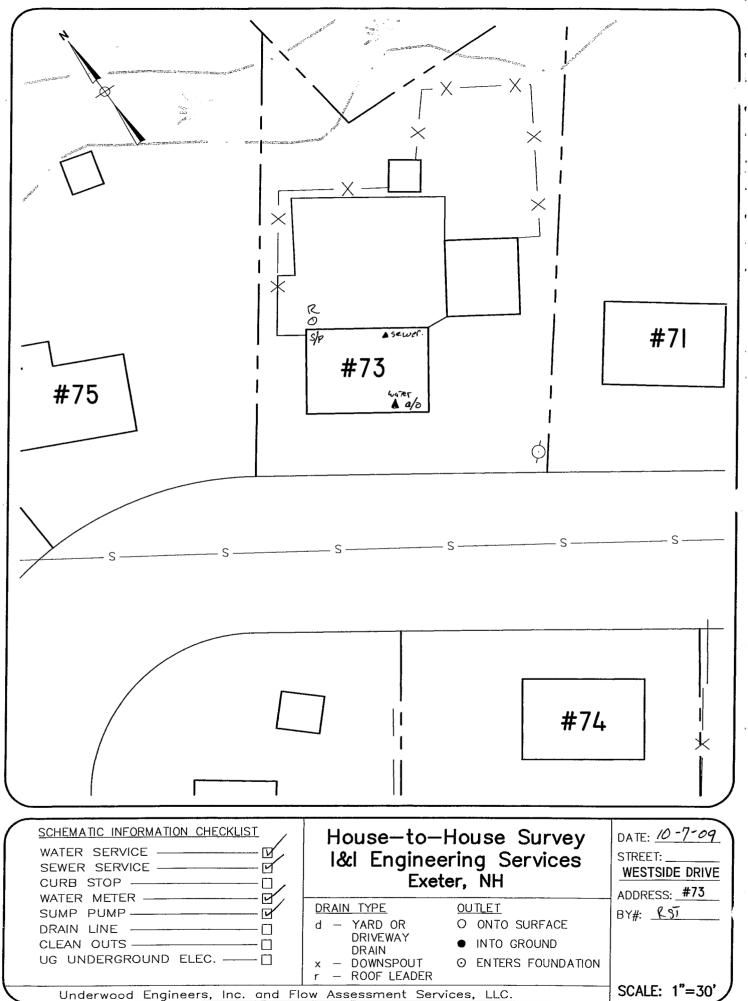


H:\SDSKPROJ\\ 342LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/21/2009 10:07:06 AM, rla

Lot #	I/I Engineering Services vter, NH				Flow Assessment Services Bedford, NH
Initial Visit: Date 10-7-09 Time: 10 successful, Left Flyer Not Admitted Other 2 ¹⁴ Visit: Date Time: 10 successful, Left Flyer Not Admitted Other 3 ¹⁴ Visit: Date Time: 10 successful, Left Flyer Not Admitted Other 1. Have any of the following problems occurred? Flooded Basement D Sewage in Basement D Clogged Pipe Not Known Other Comments: P2-Fielble 5ursp. 70 Just Face.	Lot # Tax Map #	Sub System	Street # <u>74 wee</u>	TSIDE Dr. Inte	rviewer RST
1. Have any of the following problems occurred? Flooded Basement if Sewage in Basement □ Clogged Pipe □ Not Known □ Other □ Comments:	Multi Unit Res 🗆 Single Unit Res 🛱	Commercial □ # of Univ	ts House Vacan	t 🗆	
Flooded Basement if Sewage in Basement Clogged Pipe Not Known Other Comments: Other Comments: Comments: Period ble Sump ID Sufface 2. Is there a basement? Full Basement & Crawl Space Distance From Basement Floor to Sill	Initial Visit: Date <u>10-7-09</u> 2 nd Visit: Date 3rd Visit: Date	_ Time: <u>/347</u> _ Time: _ Time:	Unsuccessful, Left Flyer Unsuccessful, Left Flyer Unsuccessful	Not Admitted (Not Admitted)	Dther Dther Other
Comments: Prideble guerre 10 Just Face 2. Is there a basement? Full Basement & Crawl Space Distance From Basement Floor to Sill	1. Have any of the following problems of	occurred?			
2. Is there a basement? Full Basement @ Crawl Space Slab Floor Dirt Floor Comments: Sever Invert Information? Cannot Locate Distance From Basement Floor to Sill <u>63</u> ^{''}	Flooded Basement 🛛 Sewage in Ba	sement 🗆 Clogged Pipe 🗆	Not Known 🗆 Other 🗆		
2. Is there a basement? Full Basement @ Crawl Space Slab Floor Dirt Floor Comments: 3. Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill <u>62</u> " Above Floor Level – Distance From Invert to Sill Unknown Distance From Floor Below Floor Level @ Pipe Material: Cast Iron PVC Clay Other Comments: 	Comments: <u>Portable sump</u>	TO SUFFACE.			
Above Floor Level – Distance From Invert to SillUnknown Distance From Floor Below Floor Level @ Pipe Material: Cast Iron Ø PVC Clay Other	2. Is there a basement? Full Basement				
Fipe Material: Cast Iron 2 PVC □ Clay □ Other Comments:	3. Sewer Invert Information? Cannot I	.ocate 🗆 Distance From B	asement Floor to Sill	<u> </u>	
Comments:	Above Floor Level – Distance From I	nvert to Sill 🗆 💁	Unknown Distance 1	From Floor	Below Floor Level
.s there a Sump Pump? Yes I/ No	Pipe Material: Cast Iron D PVC	Clay 🗆 Other			
If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface of Cannot Locate Unknown Other Comments:	Comments:				
Unknown □ Other Comments:					
Unknown □ Other	If yes, where does the pump discharge	2? Sanitary Sewer 🗆 Sep	arate Pipe Out 🗆 Surface 🗹	Cannot Locate □	
Comments:					
Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:					
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer) Roof Leader (RL) Into Foundation <td< td=""><td>. Are the following present in the basen Open Clean Out □ Basement Drain</td><td>ient to collect water from the Open Pipe 🗆 Sum</td><td>e floor? (indicate if connected p Pit □ Recommend Dye T</td><td>l to sewer) `est □</td><td></td></td<>	. Are the following present in the basen Open Clean Out □ Basement Drain	ient to collect water from the Open Pipe 🗆 Sum	e floor? (indicate if connected p Pit □ Recommend Dye T	l to sewer) `est □	
Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface Flat Roof Drain System Yard Drain Water Service Information: Cannot Locate Above Floor Level Distance from Sill Pipe Material: Copper Plastic Iron Lead Other	Comments:				
Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Drain Water Service Information: Cannot Locate Above Floor Level Distance from Sill Below Floor Level Pipe Material: Copper Plastic Iron Lead Other Comments:	Any of the following present outside the	ne building (Put quantity ob	served in spaces marked and i	ndicate if connected to	o sewer)
Flat Roof Drain System Yard Drain Window Well Drain Stair Well Drain Driveway Drain Water Service Information: Cannot Locate Above Floor Level Distance from Sill Below Floor Level Pipe Material: Copper Plastic Iron Lead Other Comments:	Roof Leader (RL) Into Foundation	RL Into (Ground RL	Onto Surface	
Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level □ Pipe Material: Copper □ Plastic □ Iron □ Lead □ Other Comments:		-			
Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level □ Pipe Material: Copper □ Plastic □ Iron □ Lead □ Other Comments:	Comments:				
Pipe Material: Copper 🕑 Plastic 🗆 Iron 🗆 Lead 🗆 Other Comments:	Water Service Information:				
	Pipe Material: Copper 🛛 Plastic	□ Iron □ Lead □ (Other	Comments:	
uieral Comments:	nieral Comments:			.	
NOTE – SEE SKETCH ON BACK					

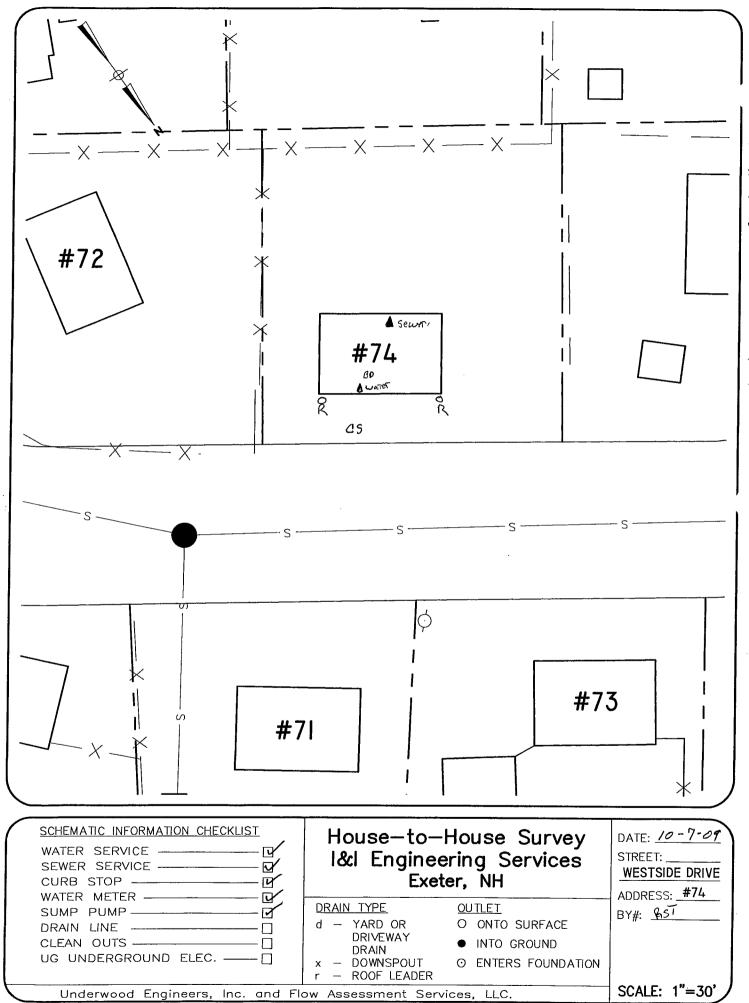

I/I Engineering Services ter, NH			Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # <u>75 we</u>	STS 1DE D& Interviewer 631
Multi Unit Res 🗆 Single Unit Res	Commercial 🗆 # of Units	B House Vacant	. 0
Initial Visit: Date 2^{nd} Visit: Date 3rd Visit: Date	Time: Time: Time:	Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🗅 Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
	Basement 🗆 Clogged Pipe 🗆	ι ·	
2. Is there a basement? Full Basemen	t⊠ Crawl Space □ Slab	Floor 🗆 Dirt Floor 🗆 Cor	mments: PARTIALY FINISHED
Pipe Material: Cast Iron 🗙 PV	Invert to Sill	Unknown Distance F	From Floor Below Floor Level
s there a Sump Pump? Yes □ N If yes, where does the pump dischar, Unknown □ Other	ge? Sanitary Sewer □ Sepa		
Comments: <u>RESIDENT SAID SHE THI</u> ARE ACOUNTED FOR.	ONGHT THERE WAS A SUM	AP PUMP. WE COULD	NOT FIND ONE, ALL PIPES ON STACK
Are the following present in the base Open Clean Out □ Basement Drai Comments:	n 🗆 Open Pipe 🗆 Sump	Pit 🗆 Recommend Dye T	
Any of the following present outside Roof Leader (RL) Into Foundation Flat Roof Drain System □ Yard D Comments:		iround RL	Onto Surface
	evel 🗆 Distance from Sill		
aieral Comments:			

NOTE -	SEE	SKETCH	ON	BACK

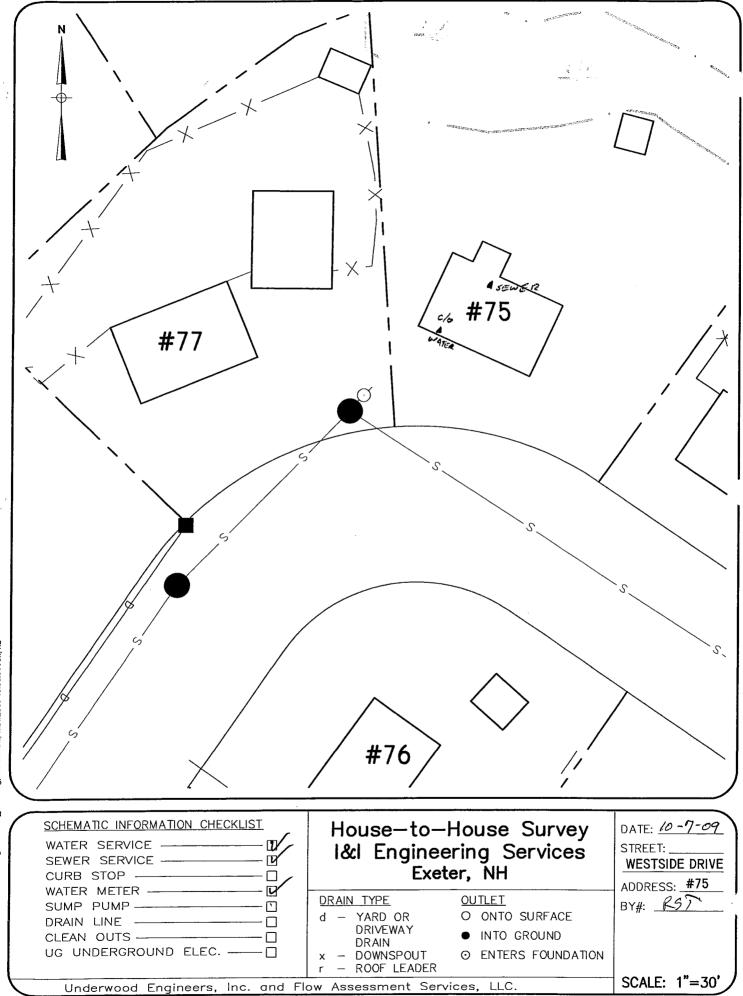

H:\SDSKPROJ\\ 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 10:03:01 AM, rla

.


I/I Engineering Services Freter, NH	HOUSEBORVEL	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System	nStreet #_76 westside	PDF_Interviewer_RST
Multi Unit Res D Single Unit Res Commercial D # c	of Units House Vacant 🗆	
Initial Visit: Date $10 - 7 - 09$ Time: 1359 2^{nd} Visit: DateTime:Time: $3rd$ Visit: DateTime:Time:	Unsuccessful, Left Flyer 🛛 🛛 Not A	dmitted Other dmitted Other dmitted Other
 Have any of the following problems occurred? Flooded Basement Sewage in Basement Clogged F Comments:		
2. Is there a basement? Full Basement Crawl Space	Slab Floor Dirt Floor Comments:	·
3. Sewer Invert Information? Cannot Locate Distance F Above Floor Level – Distance From Invert to Sill D Pipe Material: Cast Iron PVC C Clay Othe Comments: <u>home on a state sewer clear out</u> in	Unknown Distance From Flo	oor Below Floor Level
is there a Sump Pump? Yes D No D If yes, where does the pump discharge? Sanitary Sewer D Unknown D Other Comments:		
 5. Are the following present in the basement to collect water for Open Clean Out Comments:	Sump Pit Recommend Dye Test	,
 6. Any of the following present outside the building (Put quar Roof Leader (RL) Into Foundation RI Flat Roof Drain System D Yard Drain D Window We Comments: 	L Into Ground RL Onto S ell Drain 🗆 Stair Well Drain 🗆 Drivewa	ay Drain []
7. Water Service Information: Cannot Locate Above Floor Level Distance from S Pipe Material: Copper Plastic Iron Lead		Floor Level B
Jeneral Comments:		

-

NOTE – SEE SKETCH ON BACK

• •


.

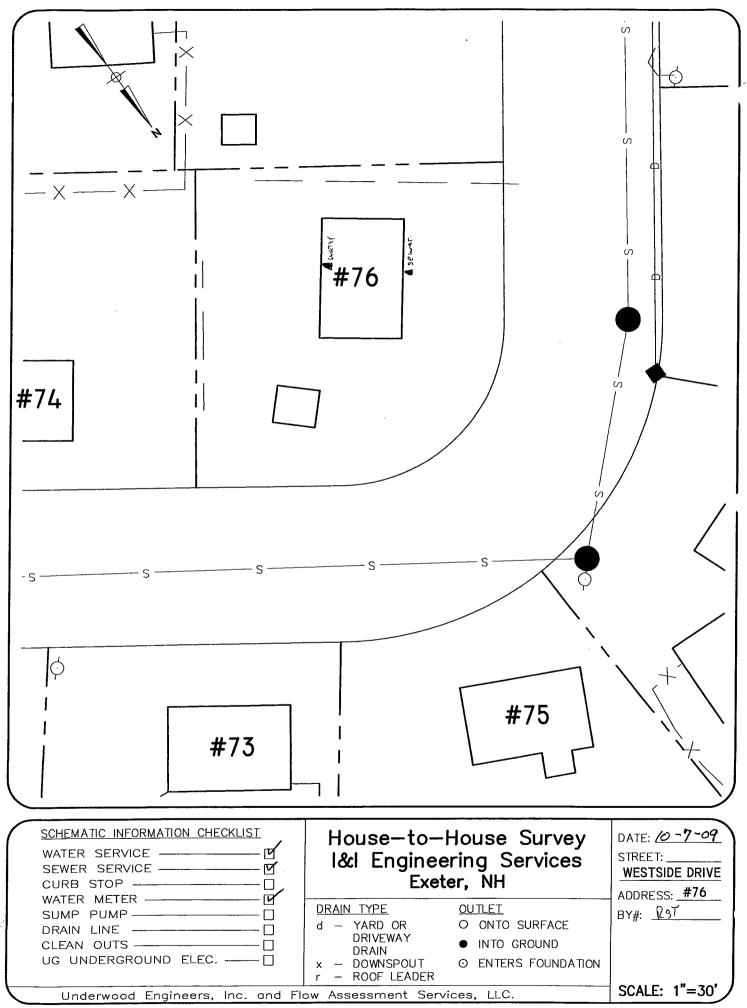

I/I Engineering Services	Flow Assessment Services Bedford, NH
Lot # Tax Map # Sub System Street # <u>77ke</u>	STSIDE DI: Interviewer RST
Multi Unit Res 🛛 Single Unit Res 🗹 Commercial 🗆 # of Units House Vaca	
Initial Visit: Date 10-7-09 Time: 1407 Unsuccessful, Left Flyer □ 2 nd Visit: Date Time: 1100 Unsuccessful, Left Flyer □ 3rd Visit: Date Time: Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
I. Have any of the following problems occurred?	
Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments:	
2. Is there a basement? Full Basement 🗹 Crawl Space 🗆 Slab Floor 🗆 Dirt Floor 🗆 C	Comments:
B. Sewer Invert Information? Cannot Locate Distance From Basement Floor to Sill	83''
Above Floor Level – Distance From Invert to Sill 🗆 Unknown Distance	From Floor D Below Floor Level
Pipe Material: Cast Iron 🕑 PVC 🗆 Clay 🗆 Other	
Comments:	
.s there a Sump Pump? Yes □ No ⊡	
If yes, where does the pump discharge? Sanitary Sewer 🗆 Separate Pipe Out 🗆 Surface	
Unknown Other	
Comments:	
Are the following present in the basement to collect water from the floor? (indicate if connecte Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye	Test 🗆
Comments: <u>Clean out capped</u>	
Any of the following present outside the building (Put quantity observed in spaces marked and	indicate if connected to sewer)
Roof Leader (RL) Into Foundation RL Into Ground RJ	L Onto Surface
Flat Roof Drain System 🗆 Yard Drain 🗆 Window Well Drain 🗆 Stair Well Drain 🗆	Driveway Drain 🗆
Comments:	
Water Service Information: Cannot Locate Above Floor Level Distance from Sill	Below Floor Level
Pipe Material: Copper 🕑 Plastic 🗆 Iron 🗆 Lead 🗆 Other	Comments:
ceral Comments:	

NOTE - SEE SKETCH ON BACK


.....

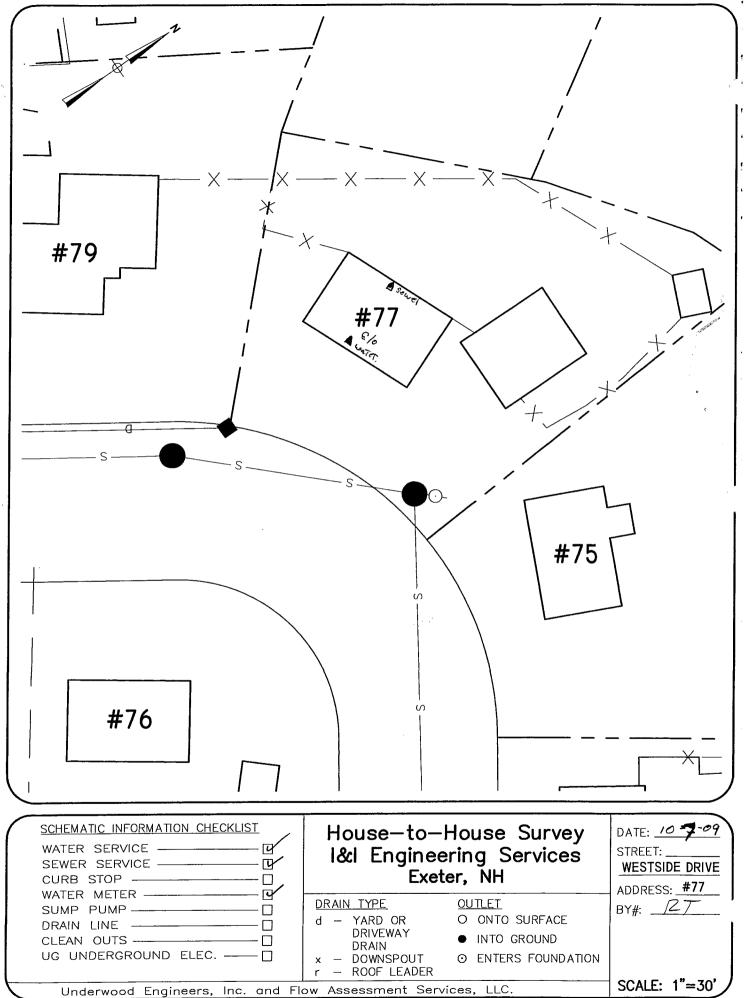

H:\SDSKPROJ\\. 542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/21/2009 11:34:53 AM, rla

I/I Engineering Services Exeter, NH			Flow Assessment Services Bedford, NH
Lot # Tax Map #	Sub System	Street # <u>79 wr</u>	Tside Dr. Interviewer RST.
Multi Unit Res 🗆 🛛 Single Unit Res 😰 🤇			
nitial Visit: Date $10 - 7 - 09$ 2^{nd} Visit: Date Brd Visit: Date	Time: <u>1413</u> Time: Time:	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
Comments: <u>Sump Pump</u>	nent 🗆 Clogged Pipe 🗆		
. Is there a basement? Full Basement	Crawl Space Slab I	Floor 🗆 Dirt Floor 🗆 Co	mments:
3. Sewer Invert Information? Cannot Loca Above Floor Level – Distance From Inve Pipe Material: Cast Iron PVC Comments:	rt to Sill □ Clay □ Other	Unknown Distance I	From Floor Below Floor Level
s there a Sump Pump? Yes r No If yes, where does the pump discharge? Unknown Other Comments:			
Are the following present in the basemen Open Clean Out \Box Basement Drain \Box Comments: <u>Clean own</u> Capp	Open Pipe 🗆 Sump	Pit P Recommend Dye 7	fest
Any of the following present outside the Roof Leader (RL) Into Foundation Flat Roof Drain System D Yard Drain	RL Into G	round RI	Onto Surface Driveway Drain □
Comments:			
Water Service Information: Cannot Locate Above Floor Level	□ Distance from Sill		Below Floor Level D

NOTE - SEE SKETCH ON BACK

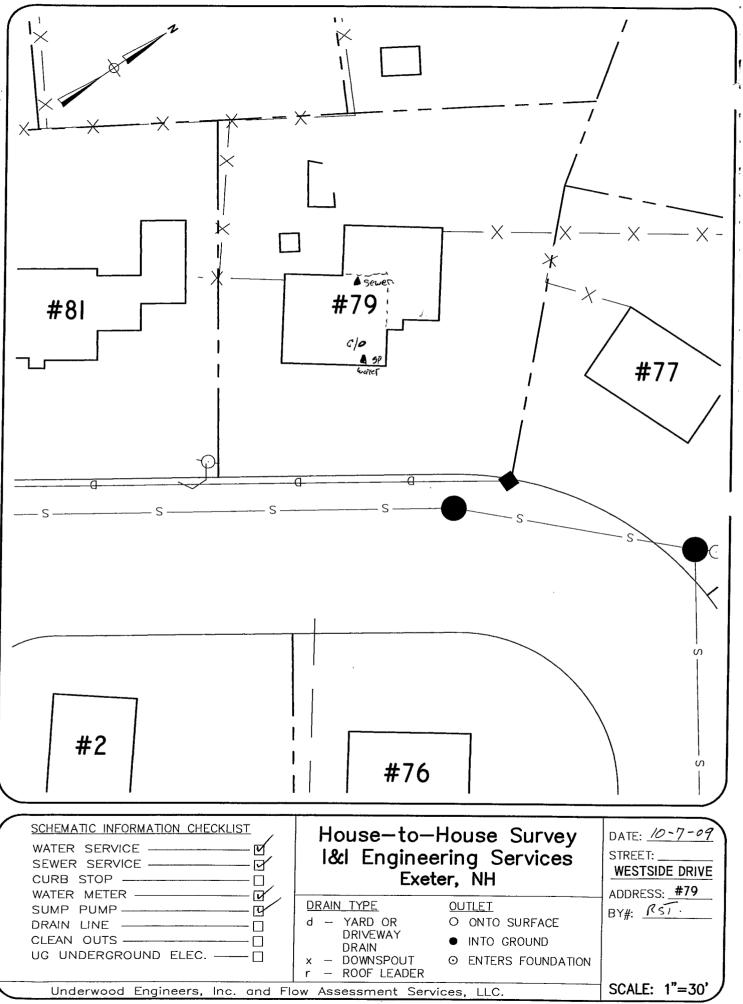


H:\SDSKPROJN. 542LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 11:33:21 AM, rla

I/I Engineering Services Fxeter, NH

Flow Assessment Services Bedford, NH

_


Lot # Tax Map # Sub System Street # <u>81 West side Dr.</u> Interviewer <u>R57</u>	
Multi Unit Res 🛛 Single Unit Res 🕼 Commercial 🗆 # of Units House Vacant 🗆	
Initial Visit: Date $10 - 7 - 09$ Time: 1423 Unsuccessful, Left FlyerNot AdmittedOther 2^{nd} Visit: Date $10 - 8 - 09$ Time: 1697 Unsuccessful, Left FlyerNot AdmittedOther $3rd$ Visit: DateTime: 1697 Time: 1697 Unsuccessful, Left FlyerNot AdmittedOther $3rd$ Visit: DateTime:Time: 1697 UnsuccessfulNot AdmittedOther	
1. Have any of the following problems occurred? Flooded Basement Sewage in Basement Clogged Pipe Not Known Other Comments: NOT WITH NEW SUMP PUNP	
2. Is there a basement? Full Basement Crawl Space Slab Floor Dirt Floor Comments:	
Sewer Invert Information? Cannot Locate □ Distance From Basement Floor to Sill So '' Above Floor Level Distance From Invert to Sill □ Unknown Distance From Floor □ Below Floor Level Pipe Material: Cast Iron A PVC □ Clay □ Other Comments:	
_ there a Sump Pump? Yes) No If yes, where does the pump discharge? Sanitary Sewer Separate Pipe Out Surface Comments:	
. Are the following present in the basement to collect water from the floor? (indicate if connected to sewer) Open Clean Out Basement Drain Open Pipe Sump Pit Recommend Dye Test Comments:	
Any of the following present outside the building (Put quantity observed in spaces marked and indicate if connected to sewer) Roof Leader (RL) Into Foundation RL Into Ground RL Onto Surface Flat Roof Drain System I Yard Drain I Window Well Drain I Stair Well Drain I Driveway Drain I Comments:	
Water Service Information: Cannot Locate □ Above Floor Level □ Distance from Sill Below Floor Level × Pipe Material: Copper × Plastic □ Iron □ Lead □ Other Comments:	
Comments:	

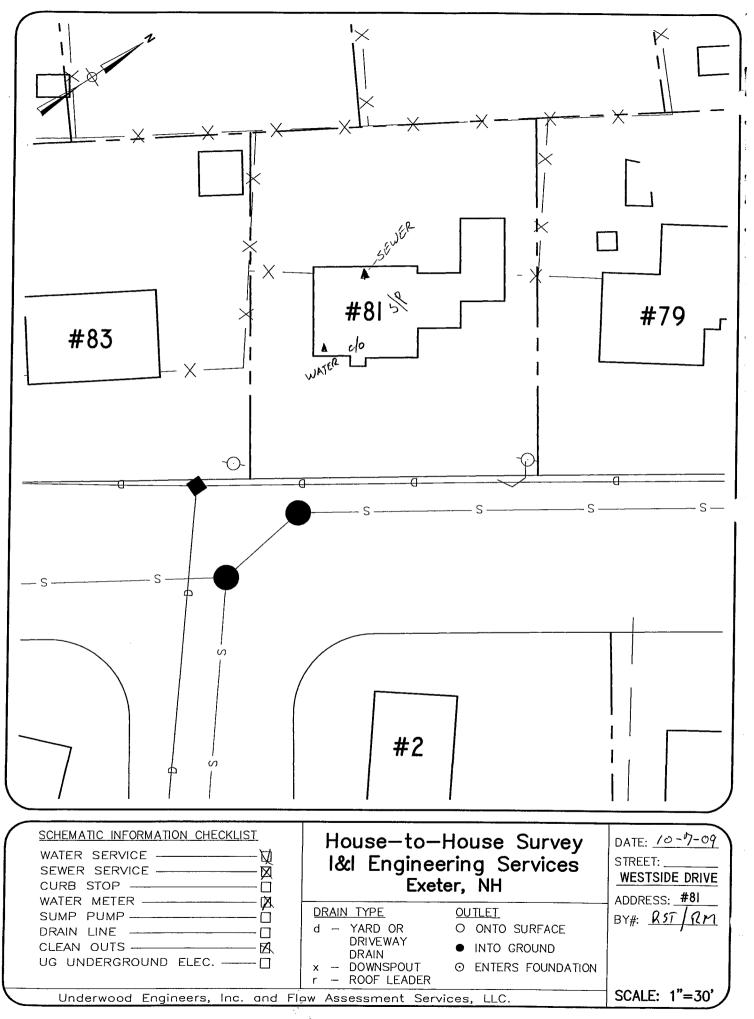

H:\SDSKPRDJ\\. 542LDD\dwg\EXETER_G\S.dwg, HSE2HSE, 5/21/2009 11:32:06 AM, rla

/I Engineering Services			Flow Assessment Services Bedford, NH
_ot # Tax Map #	Sub System	Street # 82 WE	STSIDE DR-Interviewer R3T
Multi Unit Res 🛛 Single Unit Res			
nitial Visit: Date $10-7-09$ 2^{nd} Visit: Date 3rd Visit: Date	Time: <u>1520</u> Time: Time:	Unsuccessful, Left Flyer 🛛 Unsuccessful, Left Flyer 🗅 Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
1. Have any of the following problem	s occurred?		
Flooded Basement D Sewage in 2	Basement 🛛 Clogged Pipe 🗆] Not Known 🗆 Other 🗆	
	/		mments:
Sewer Invert Information? Canno	t Locate 🗆 Distance From F	Basement Floor to Sill	74
Above Floor Level – Distance From	n Invert to Sill 🗆	Unknown Distance I	From Floor 🛛 🛛 Below Floor Level 💁
Pipe Material: Cast Iron D/ PV	/C 🗆 Clay 🗆 Other		-
Comments:			
· · · · · · · · · · · · · · · · · · ·	4		
there a Sump Pump? Yes 🗆 کړ there a Sump Pump?			
If yes, where does the pump discha		-	
Unknown 🗆 Other			
Comments:			
Are the following present in the bas Open Clean Out Basement Dra	in □ Open Pipe □ Sum	np Pit □ Recommend Dye T	lest 🗆
Comments: <u>Clean out</u>	Capped:		
. Any of the following present outside		-	*
RoofLeader (RL) Into Foundation	RL Into	Ground RL	Onto Surface
Flat Roof Drain System 🛛 🛛 Yard I			Driveway Drain 🗆
Comments:			
Water Service Information: Cannot Locate Above Floor L	evel □ Distance from Sill		Below Floor Level
Pipe Material: Copper 🖌 Plast	c 🗌 Iron 🗆 Lead 🗆	Other	Comments:
ucital Comments:			
	· · · · · · · · · · · · · · · · · · ·	······	

NOTE - SEE SKETCH ON BACK

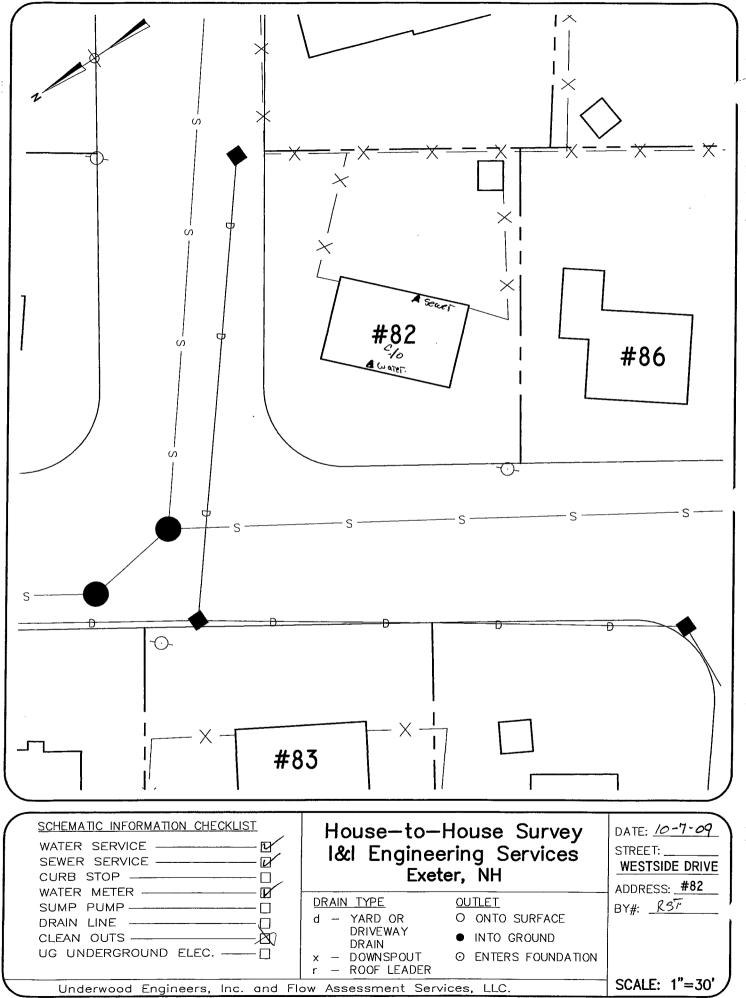


I/I Engineering Services

Flow Assessment Services Bedford, NH

Lot #	Tax Map #	Sub System	Street # 83 we	STSIDE DE Interviewer RST/RM
Multi Unit Rea	s 🗆 Single Unit Res 🗗	Commercial 🗆 # of Units	House Vacan	ıt 🗆
nitial Visit: D 2 nd Visit: D 3rd Visit: D	Date <u>10 - 7 - 0 9</u> Date <u>10 - 8 - 0 9</u> Date	Time: <u>/426</u> Time: <u>/6:47</u> Time:	Unsuccessful, Left Flyer □ Unsuccessful, Left Flyer □ Unsuccessful	Not Admitted Other Not Admitted Other Not Admitted Other
. Have any of	f the following problems o	ccurred?		
Flooded Bas	sement X Sewage in Bas	ement 🗆 Clogged Pipe 🗆 🗎	Not Known 🛛 Other 🗆 _	
Comments:	Previous OWNERS	HAD FLOOD		
. Is there a bas	sement? Full Basement §	Crawl Space □ Slab F	loor 🗆 Dirt Floor 🗆 Co	omments:
. Sewer Invert	t Information? Cannot L	ocate 🗆 Distance From Bas	ement Floor to Sill $\underline{\mathcal{SE}}$	5.2
				From Floor 🛛 🛛 Below Floor Level 🕅
Pipe Materia	l: Cast Iron 🗶 PVC	Clay Other		
Comments: _	·			
Unknown 🗆 Comments: _	S/P NEVER RUN			
	wing present in the basem Out Basement Drain	ent to collect water from the fi □ Open Pipe □ Sump F		
Comments: _				
Any of the fo	llowing present outside th	e building (Put quantity obser	rved in spaces marked and i	ndicate if connected to sewer)
Roof Leader	(RL) Into Foundation	RL Into Gr	oundRL	. Onto Surface
		/ in □ Window Well Drain [Driveway Drain 🗆
Comments: _		·····		
	e Information:	el □ Distance from Sill		Below Floor Level 🗙
Water Service Cannot Locate				
Cannot Locate		Iron 🗆 Lead 🗆 Otl	her	Comments:
Cannot Locate Pipe Material:	: Copper Plastic	•		_ Comments:


NOTE – SEE SKETCH ON BACK

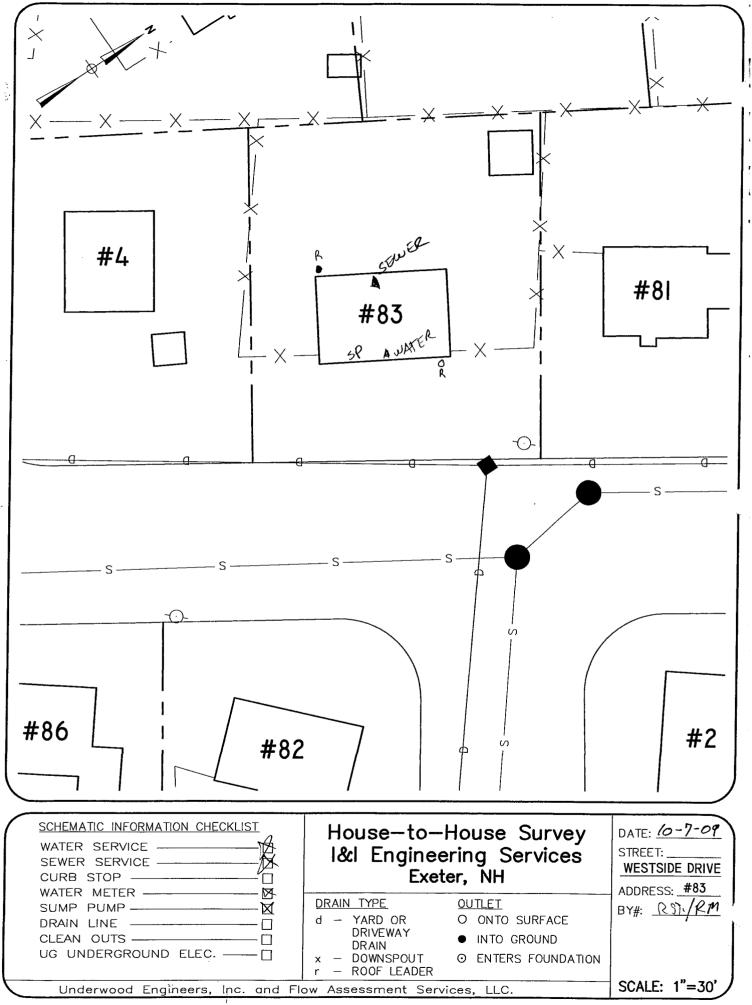

1....


F-eter, NH					w Assessment Services Iford, NH
			Street # <u>86 ωe</u>	stside Dr. Interviewe	er R37. RM
Multi Unit Res	□ Single Unit Res Ø	✓ Commercial □ # of Un	its House Vacan	t 🖸	7
	ate $10 - 7 - 09$ ate $10 - 8 - 09$ ate	Time: <u>1528</u> Time: <u>17:50</u> Time:	Unsuccessful, Left Flyer 🗆 Unsuccessful, Left Flyer 🗆 Unsuccessful	Not Admitted Other_	
1. Have any of t	the following problems of	occurred?			
			□ Not Known □ Other □		
2. Is there a base	ement? Full Basement	🗶 Crawl Space 🗆 🛛 Sla	b Floor 🗆 🛛 Dirt Floor 🗆 Co	mments:	
Above Floor I Pipe Material:	Level – Distance From I : Cast Iron 🗶 PVC	nvert to Sill 🗆	Basement Floor to Sill83	From Floor 🛛 🔅 Bel	, , , , , , , , , , , , , , , , , , ,
If yes, where Unknown □	Other	? Sanitary Sewer 🕅 Sej	parate Pipe Out 🗆 Surface 🗆		
Open Clean O	ving present in the basen out 🗆 Basement Drain	ent to collect water from th D Open Pipe D Sun	ne floor? (indicate if connected np Pit □ Recommend Dye T	to sewer) Sest 🗆	
Roof Leader (Flat Roof Dra	(RL) Into Foundation in System 🗆 Yard Dra	RL Into	bserved in spaces marked and in Ground <u>O</u> RL in D Stair Well Drain D	Onto Surface <u>3</u> Driveway Drain 🛛	
. Water Service Cannot Locate Pipe Material:	□ Above Floor Lev	el 🛙 Distance from Sill	Other	Below Floor Level 🛛 🗙	
uéral Comment					
				····	

NOTE – SEE SKETCH ON BACK

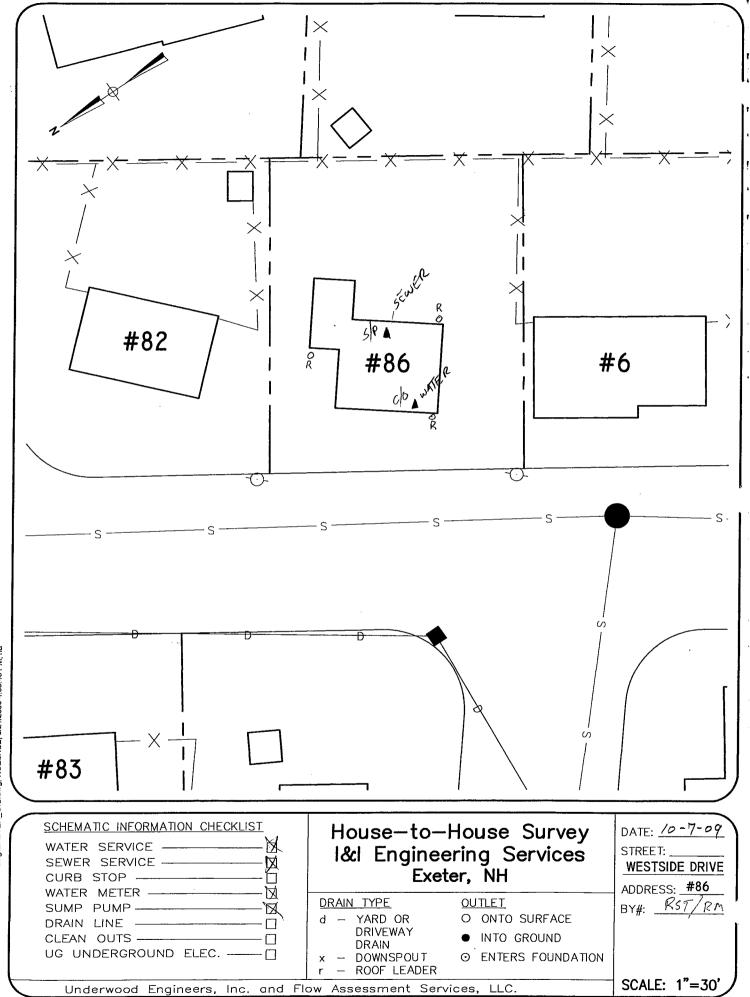

H:\\SDSKPROJ\. 642LDD\dwg\EXETER_GIS.dwg, HSE2HSE, 5/21/2009 4:05:48 PM, rla

Appendix H Road Condition Analysis

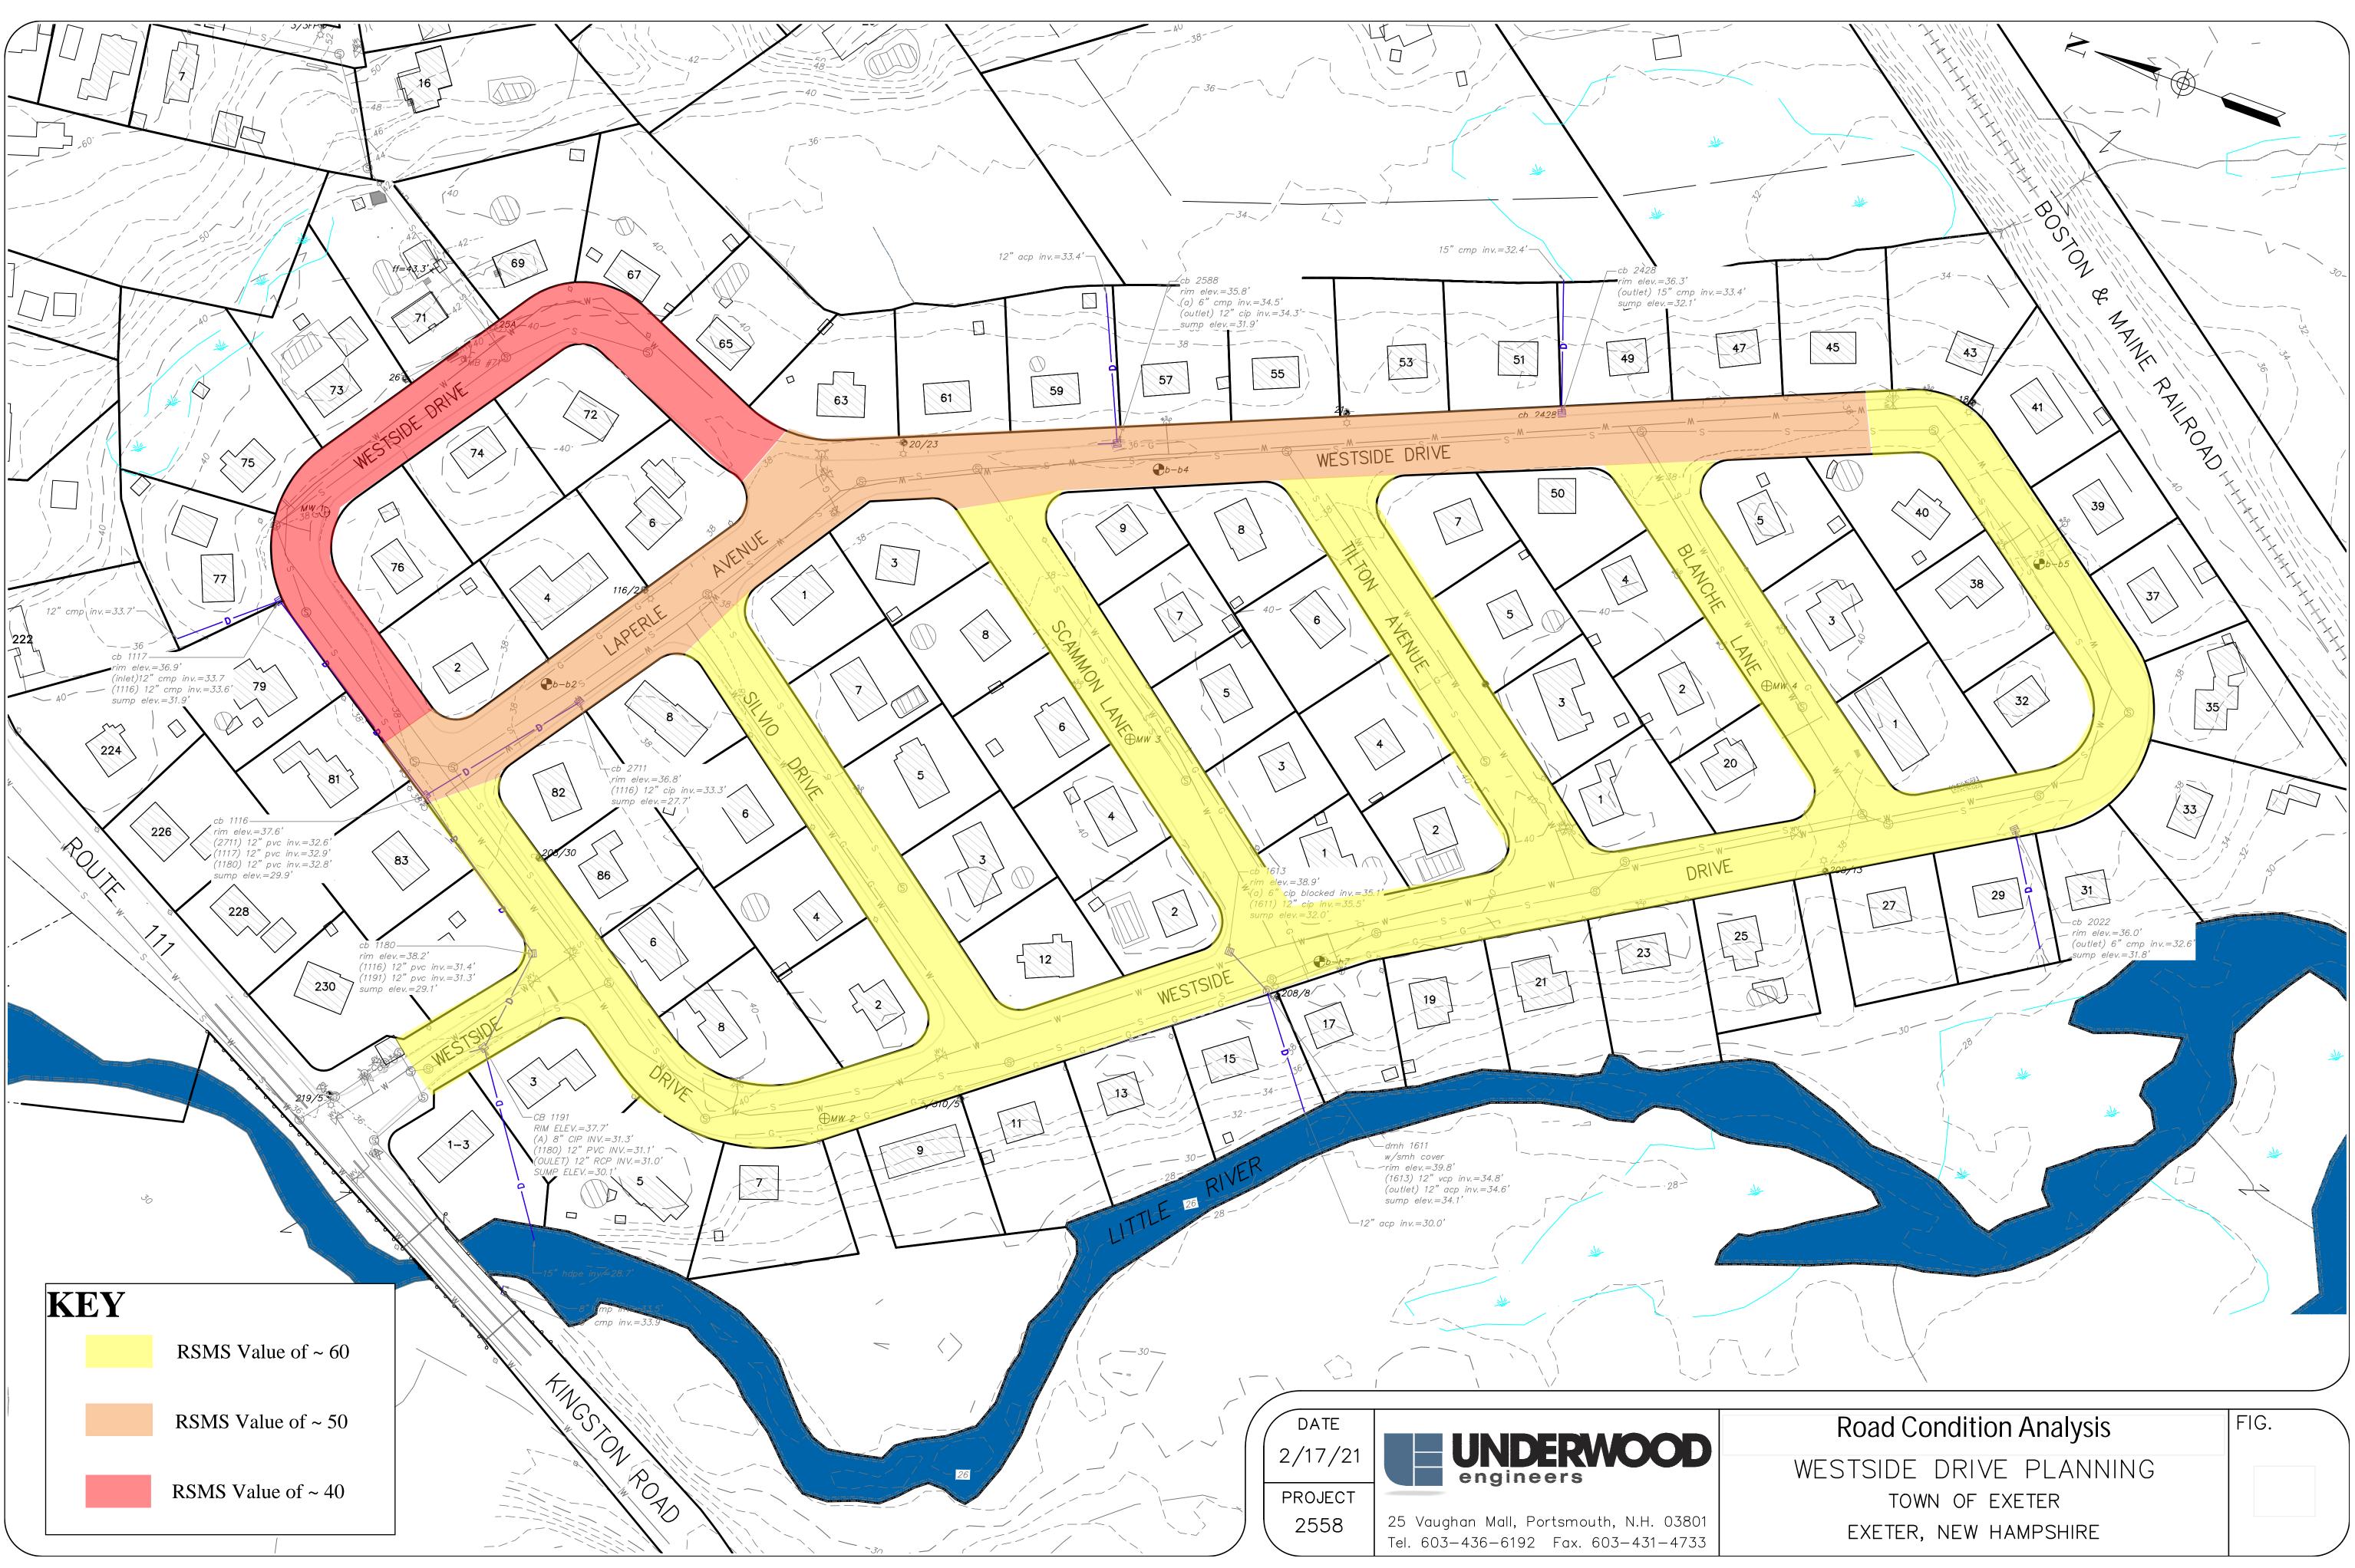

Road Condition Analysis	FIG.
WESTSIDE DRIVE PLANNING	
TOWN OF EXETER	
EXETER, NEW HAMPSHIRE	


RSMS Inventory and Condition Assessment Asphalt Surface Road Sections

,

Inspected by: <u>EBN</u>/csm

Date: 3.12.21			RIN:				
Road Name: Westsil	Drive t	Cross Sta	Road Section	on:			
Seq. No.:			Maintenan	ce Div.:	-		
From	То		Jurisdiction	n:			
No. Lanes W	vidth: 150	ft					
Shoulder Width:			Class: V				
Shoulder: Natural			Traffic:	Â	2 3 4	5	
					2 3 4 2 3 4	5	
Gravel Backing: Yes		· 11.	Importance		2 3 4	5	
Shoulder Description: \underline{N}	robally Side	Walk					
and Curb	Ĩ						
Mile Post: E	nd Post:						
	La		۸)				
Comments: Road C	suditions_	were	harry con	nsistert	throught	the	
aren. Transverse	e crackin	s seen	el constitu	intly sp	raced to	neitrolad	
aren. Transverse Crocking evident	. Not m	wh all	cator cr	melene	OF Pot	holes/ partilis	
	• / 0 0		0		<i>· · · · · · · · · · · · · · · · · · · </i>		
Condition & Deduct Val	116	<u></u>		÷	<u></u>		
	<u>uv</u>						
				←	Extent	\rightarrow	
			None	Low	Medium	High	
		τ	No Defects	<10%	10-30%	>30%	
Alligator Cracking	Severity	Low Medium	0	$\frac{2}{5}$	5	8	
	Seventy	High		5)	8	11 14	
			No Defects	<u> </u>	10-30%	>30%	
Long/Trans Cracking		Low	0	2	5	8	
	Severity	Medium	L	5	8	11	
	-	High		8	(11	(14)	
			No Defects	<10%	10-30%	>30%	
Edge Cracking		Low		2	5	8	
	Severity	Medium		5	8	11	
		High		8	11	14	
n . 1 m . 1 1			No Defects		1		
Patch/Pothole	••••••		0	2	5	14	
D				Good	Fair	Poor	
Roughness	••••••			0	<u>(8)</u>	15	
Rutting				None (0)	0-1 inch	>1 inch 14	
-				Good	r <u> </u>	Poor	
Drainage		•••••		0	(8)	14	

Westside Drive and Cross Streets Photos

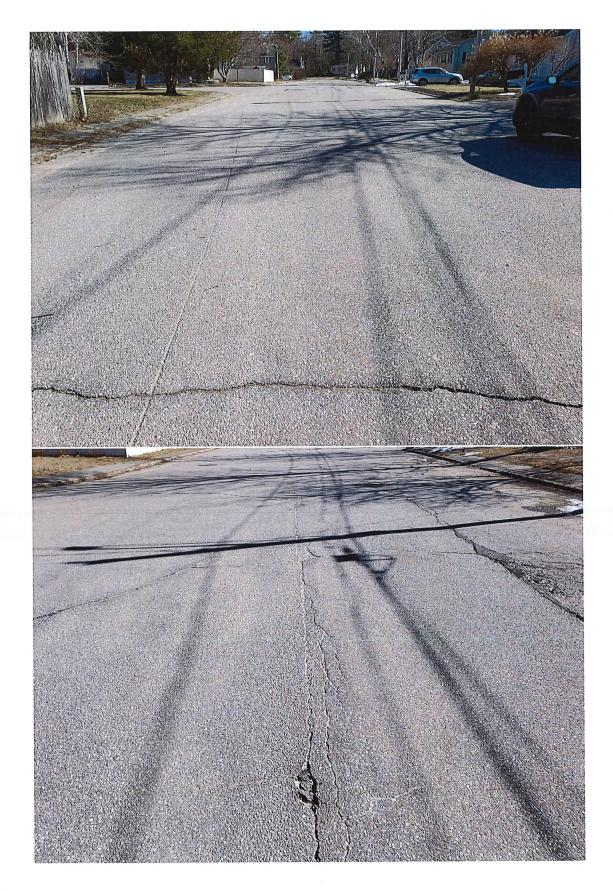

Westside Drive and Cross Streets Photos



Westside Drive and Cross Streets Photos



RSMS Inventory and Condition Assessment Asphalt Surface Road Sections


Inspected by: \underline{FBN}/CFM


Date:		RIN:					
Road Name: Loop (Wests: Je			Road Section:				
Seq. No.:			Maintenance Div.:				
From To			Jurisdiction:_				
No. Lanes V		_ft					
Shoulder Width:			Class: V				
Shoulder: Natural Gravel			Traffic:	(AD)	2 3 4	5	
Gravel Backing: Yes No			Importance:	A	2 3 4 2 3 4	5	
Shoulder Description: _	ł	×					
Curbing							
Mile Post: E	Ind Post:						
Comments: Aren Allightor Crade Porting through Stans on fa Condition & Deduct Va	lt, apac wiment lue	in Alé	e ground	Water	Extent Medium 10-30%	→ Kmst High >30% 8	
	Severity	Medium High	-	<u> </u>	8	11	
		-	No Defects	<10%	10-30%	>30%	
Long/Trans Cracking	Q - ''	Low	0	2	5	8	
	Severity	Medium High		5	8	<u> </u>	
		8	No Defects	<10%	10-30%	>30%	
Edge Cracking		Low	$\left[\begin{array}{c} 0 \end{array} \right]$	2	5	8	
	Severity	Medium		5	8	11	
	2	High	-	8	11	14 -	
			No Defects	·			
Patch/Pothole			0	2	(5)	14	
				Good	Fair	Poor	
Roughness				0	8(/	(15)	
Dutting			F	None	0-1 inch	>l inch	
Rutting				0	<u> </u>	<u>14</u>	
Drainage	Γ	Good 0	Fair 8	(14)			

1





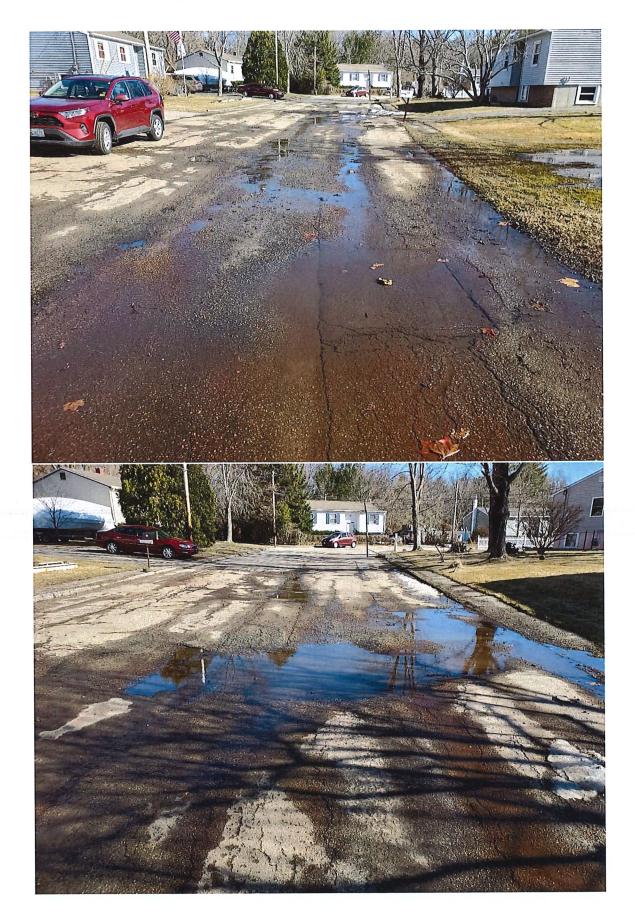

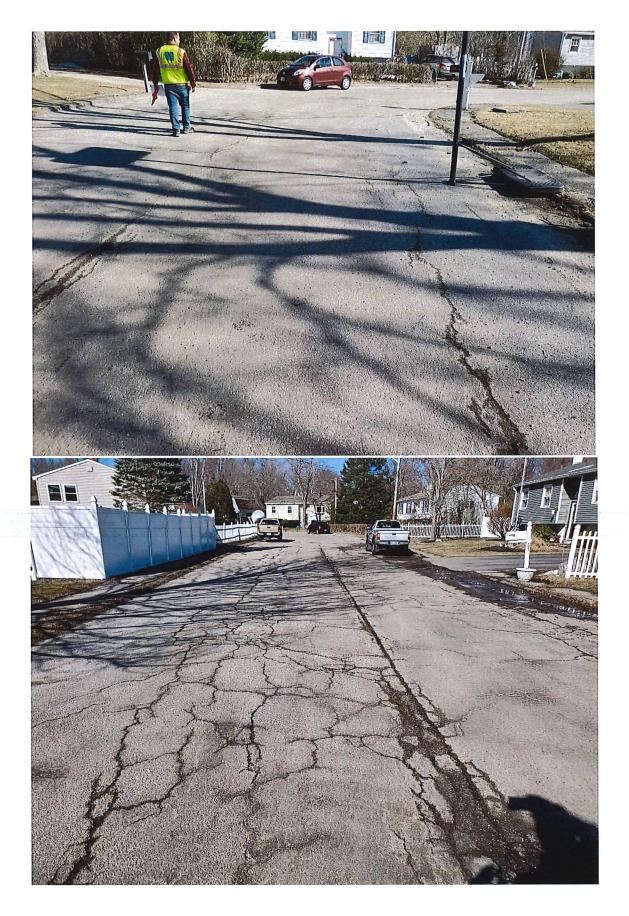

RSMS Inventory and Condition Assessment Asphalt Surface Road Sections

Inspected by: Flan Joson

Date:			RIN:			/	
Road Name: 1235	TiltmE +	a Legen Me	Road Sectio	n:			
Seq. No.:			Maintenance Div.:				
From	То		Jurisdiction:_				
		£4					
No. Lanes	width: $\frac{7}{50}$	_n					
Shoulder Width:	ft		Class: V	~			
Shoulder: Natu	ral Gravel		Traffic:	(1) 2	2 3 4	5	
Gravel Backing: Yes	No		Importance	$: \widehat{D}$	2 3 4 2 3 4	5	
Shoulder Description:		l		\bigcirc			
Shoulder Description:	3.04 WAT	- ann					
Carbing							
<u> </u>							
Mile Post:	End Post:						
Comments: Section <u>Continues</u> on and <u>and</u> Potholes <u>Laperle</u> and <u>N</u> <u>Condition & Deduct V</u>	Anding or fonding or	Laperle	en hus	More Po Neur An	tehing	rutting,	
			1	←	Extent	\rightarrow	
			None	Low	Medium	High	
			No Defects	<10%	10-30%	>30%	
Alligator Cracking		Low	0	2	<u> </u>	8	
	Severity	Medium		<u>5</u>	8	11	
		High		8	11	14	
		_	No Defects	<10%	10-30%	>30%	
Long/Trans Cracking		Low	0	2	5	8	
	Severity	Medium		5	8	11	
Edge Cracking		High		8	11	>30%	
		Low	No Defects	<10%	<u>10-30%</u> 5	8	
	Severity	Medium				11	
	Severity	High		5	8	11	
		Ingn	No Defeate	<u> </u>		14	
Patch/Pothole			No Defects	2	5	14	
			Ľ <u>ť</u>	Good	Fair	Poor	
Roughness	•••••			0	(8)	15	
C C			r	None	0-1 inch	>1 inch	
Rutting				0	8	14	
Drainage			Ī	Good	Fair	Poor	
Dramage	*****	••••••		0	8	(14)	

Laperle Section Photos



Laperle Section Photos



Laperle Section Photos



Appendix I Drainage Structures

Storm Drain Outfall Inspection Form

Date Inspected	1/22/2021			
	Drive Conceptual Improvements, Exeter NH			
Outfall ID	#1			
Location	Discharges to the Little River between 15 and 17 Westside Drive			
Size	12"			
Material	ACP			
Condition	No Visible Damage to pipe, no visible blockage, water was flowing out.			
Notes	Approximately 40" of the pipe is exposed and hangs over the river bank unsupported. Outfall appears that it			
	would be damaged easily.			

Date Inspected	1/22/2021				
2588 Westside I	38 Westside Drive Conceptual Improvements, Exeter NH				
Outfall ID	#2				
Location	Discharges to the Swale behind 29 Westside Drive				
Size	6"				
Material	СМР				
Condition	No Visible Damage to pipe, no visible blockage				
Notes	Approximately 13" of the pipe is exposed and discharges to a swale in the backyard and eventually into the				
	Lttle River				
	Blanche Ln				
	Westside Drive				
	the states the				
	#22 J				
	#31				
	Outfall #2				
	© 2021 Google				

Date Inspected	1/22/2021				
	Drive Conceptual Improvements, Exeter NH				
Outfall ID	#3				
Location	Discharges behind 49 and 51 Westside Drive				
Size	15"				
Material	СМР				
Condition	No blockage visible, Top of outfall has been flattened				
Notes	Dischages to small stream behind properties. Water is trickling out of pipe. CB on Westside Drive was				
	mostly covered in leaves and pine needles.				

Date Inspected	1/22/2021				
2588 Westside Drive Conceptual Improvements, Exeter NH					
Outfall ID	#4				
Location	Discharges behind 59 and 57 Westside Drive				
Size	12"				
Material	ACP				
Condition	No blockage visible, Outfall partially submerged				
Notes	Dischages to small stream behind properties. Outfall is approximately 50% submerged within the wetland.				

DRAIN STRUCTURE INSPECTION REPORT

Location: Westsile	Nordh			ID No. <i>Cf</i>	51117
Dia. <u>4</u> Ft. Material: Clear Opening: In.	Britk/M	reccal By:	<u>EBN</u>	Date: <u>7/</u> Inflow Area Potential:	$\frac{1/2}{2}$
Notes: 11/2 Precast T Standing water in	op, Drick CB. SF.E. S.	Suse,	chial Inver	ts not this	161e
	€ € € ()		Clock Position	Size/ Material	Flow Depth
	€ <i>[</i> . 5] Ft.	1. $\frac{9.5^{-1}}{1.5^{-1}}$ Ft. 2. $\overline{3.5^{+1}}$ Ft.	 9	12" cmp	
		3 Ft.			
	Ft.	4 Ft. 5 Ft.			
	Ft.	al -			
	5.0 Ft7				
			#1	Conne	ets to: CBNC
		CB 116			

Infiltration: D	ed Est. GPM	Location:		H_2S pH
Observations	Material	Condition	Notes	
		Rating		0
Frame/Cover:	A	2	Square Grute	1.8 x z'
Corbel:	Rot	4	Ø	
Cone/Slab Top		2		
Walls		2	Brik	
Invert/Shelf				

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs <u>immediate</u> action.

DRAIN STRUCTURE INSPECTION REPORT

Location: UESt side	+ Laperle		ID No	51116
Clear Opening: ZY	In. Liser	By: <u>FBN</u> In. Frame <u>9</u> In	Inflow Area . Potential:	S.F.
Notes: Flat Top	CB7'Thick Water @ 5.5'	Solment 7.5' from him	(Top);	8' to SAMP
	.	Rim to Clock Inv. Depth Position		Flow Depth
		1. <u>6</u> Ft. <u>6</u>		
	Ft.	2 Ft		
		3 Ft	PUC	
	Ft.	4 Ft		
		5Ft		
	Ft.	CB771		
	 Ft.			
		#1	Conne	ects to:

Infiltration: □ None observe	ed Est. GPM	Location:		H_2S	pH
Observations	Material	Condition	Notes		
		Rating			
Frame/Cover:	65	83	Rushel		
Corbel:	Preast	Abre			
Cone/Slab Top	Precut	2/3			
Walls	Preast	21.			
Invert/Shelf	Creest				

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

DRAIN STRUCTURE INSPECTION REPORT

Location: Loperle	ID No. 08 7	7111
Dia. Ft. Material: Precest By: EBN Clear Opening: In. Corbel: 11/2 In. Frame 7 In.	Inflow Area Potential:	S.F.
Notes: 1' Riser w/ Brick wills and possible cust in Schimb @ 8', Sump @ 9.5 Not Found	place	
Rim to Clock S	Size/ Flov Material Dep	W
1. 36 Ft. 6		
[.,5']FtFt		
3 Ft		
Ft Ft		
5 Ft		
Ft.		
Ft.		
	Connects t	0:

Infiltration: None observed	Est. GPM	Location:			$_H_2S$	_ pH
Observations	Material	Condition	Notes			
		Rating				
Frame/Cover:		3				
Corbel:		4	Bride			
Cone/Slab Top		4	Assreyate	Visibe	+ Miss	ing Cache
Walls					•	
Invert/Shelf						
			·			

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

DRAIN STRUCTURE INSPECTION REPORT

Location: <u>Lestside</u> Dia. <u>4</u> Ft. Materia Clear Opening: <u>Z4</u> In. Notes: <u>Materia</u>				eaS.F.
2'	Inv 1. 1. 1. Ft. 2. 3. Ft. 4. Ft. 5. F	m to Clock v. Depth Position Ft. $\underline{6}$ Ft. $\underline{/D}$ Ft Ft Ft Ft	Size/ Material 12 ["] 12 ["]	•
	Ft.		#1 Com	nects to:

Infiltration: None observed	Est. GPM	Location:		H_2S pH
Observations	Material	Condition Rating	Notes	
Frame/Cover:		Ľ		
Corbel:		None		
Cone/Slab Top		2		
Walls		2		
Invert/Shelf				

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

	DRAIN STRUC	TURE INSPECTION REP	<u>ORT</u>	
Location:	Le + Front Stre	ect	ID No// °	7/
		By: EBN	Inflow Area	12/21
Clear Opening: <u>74</u>	_In. Corbel :	_In. Frame 📕	In. Potential:	S.F.
Notes: Flat Top;	Vater @ 6.3'	, Sodimet @ 8'	had bothom	
	Ft.	Rim to Inv. DepthClock Position1. $-$ Ft.2.Ft. $2.$ Ft. $3.$ Ft.	Material	Flow Depth
	Ft. Ft.	3. Ft. 4. Ft. 5. Ft.		
	Ft. ~		#1 Connec	ets to:

Infiltration: None observed	Est. GPM	_ Location:		$_H_2S$	pH
Observations	Material	Condition Rating	Notes		
Frame/Cover:	CI	2	4		
Corbel:	Concete.	Ц	Exposed store		
Cone/Slab Top Flit					
Walls		9	Missing Pieces of	wall	
Invert/Shelf					

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

	DRAIN STRUC	CTURE INSPECTION REP	ORT	
Location: Scannon A	Westsile,	Prive	ID No. 1613	
Dia. <u> </u>	: Precast	By: <u>EGA</u>	Date: Inflow Area	
Clear Opening: <u> </u>	Corbel: 6	In. Frame9	Innow Area	S.F.
Notes: Water @ 3.5'	, 6° Jo ;	rediment, b.8' to	3~~~p	
	\$	Rim to Clock Inv. Depth Position	Size/ Flow Material Dept	
		1 Ft6	CIP	
.5	Ft.	2 Ft		
		3 Ft		
	 Ft.	4 Ft		
	I VI	5Ft		
	Ft.			
	Ft.			
			#1 Connects to	:

Infiltration: Infiltration:	i Est. GPM	Location:	H_2S PH
Observations	Material	Condition	Notes
		Rating	
Frame/Cover:	CA	2	
Corbel:	brick	3	Hissna bricks
Cone/Slab Top		3	Missing Aggest
Walls	PC	3	Aggreite Visible
Invert/Shelf			

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

		DRAIN	STRUC	<u>FURE INSPEC</u>	TION REPOF	<u>RT</u>		
Location:	Stucke .	+ West	sk 1	Pess.		ID No. <u>Z</u>	, 077	
Dia. <u> </u>	Materia : In.	l: Corbe	1:	By: _ In. Fran	<u>KAN</u> ne <u>. 3 </u> 1	Date: Inflow Ar n. Potential:	ea	
	Prop Inly S							
		\$		Rim to Inv. Depth	Clock Position	Size/ Material		
				1. <u> </u>	6	CMP		
			Ft.	2 Ft.				
				3 Ft.				
X			 Ft.	4 Ft.				
			1 t.	5 Ft.		·		
			Ft.					
		Ft.			\ /			
					#	41 Con	nects to:	

Infiltration: None observe	ed Est. GPM	Location:		H ₂ S pH
Observations	Material	Condition Rating	Notes	
Frame/Cover:		3		
Corbel:	Brick	3M	Хите С	
Cone/Slab Top				
Walls		ł		
Invert/Shelf				

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

Project No. <u>2588</u> inicipality Exeter, NH

	Municipality Exeter,
DRAIN STRUCTURE INSPECTION REPORT	

DIGHINDING			
Location: Wests & North + Bi		ID No2	2428
Dia. <u>4</u> Ft. Material: <u>Precupt</u>		Inflow At	
Clear Opening: In. Corbel:	In. Frame /	In. Potential:	S.F.
Notes: 2' Drop Inlet, Wahre	3', 4.2' to sol		
	Rim to Clock Inv. Depth Position	Size/ Material	Flow Depth
	1 Ft6	CMP	
Ft.	2 Ft		
	3 Ft		
I Ft.	4 Ft 5. Ft.		
Ft.	J It		
		#1 Con	nects to:

Infiltration: None observe	ed Est. GPM	Location:		H_2S pH
Observations	Material	Condition	Notes	
		Rating		
Frame/Cover:		\$3		
Corbel:		41		
Cone/Slab Top		.'		
Walls		703		
Invert/Shelf				

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs <u>immediate</u> action.

DRAIN STRUCTURE INSPECTION REPORT

Location: Westsik N.			ID No. てう 家	
Dia. $\underline{-4}$ Ft. Material: Clear Opening: $\underline{-2}$ In.	Corbel:	In. Frame	Inflow Area In. Potential:	S.F.
Notes: Z' Prop Inlet,	9 10 k	20 Ham		
ernannannan an a		Rim to Clock Inv. Depth Position	Size/ Flow Material Depth	
		1. <u>1.4</u> Ft. <u>6</u>	AT 12"	
	Ft.		6" (01)	
		3 Ft		
		4 Ft		
↓	Ft.	5 Ft		-
	Ft.	<u></u>		
		(E?		
	Ft.	N. J.		
			#1 Connects to:	

Infiltration: □ None observ	ved Est. GPM	Location:		H_2S I	oH
Observations	Material	Condition Rating	Notes		
Frame/Cover:	CI	2			
Corbel:		3			
Cone/Slab Top					
Walls		4			
Invert/Shelf					

- 1. Good condition no further action needed
- 2. Minor defects no immediate action needed no I/I observed.
- 3. Minor defects or I/I potential needs attention or rehabilitation.
- 4. Significant defects and/or I/I corrective action should be scheduled in near future.
- 5. Manhole or connecting pipes in extremely poor condition failure eminent needs immediate action.

Appendix J Water AM Excerpt


Public Water System Asset Management Plan Exeter, New Hampshire



Prepared by:



May 2015

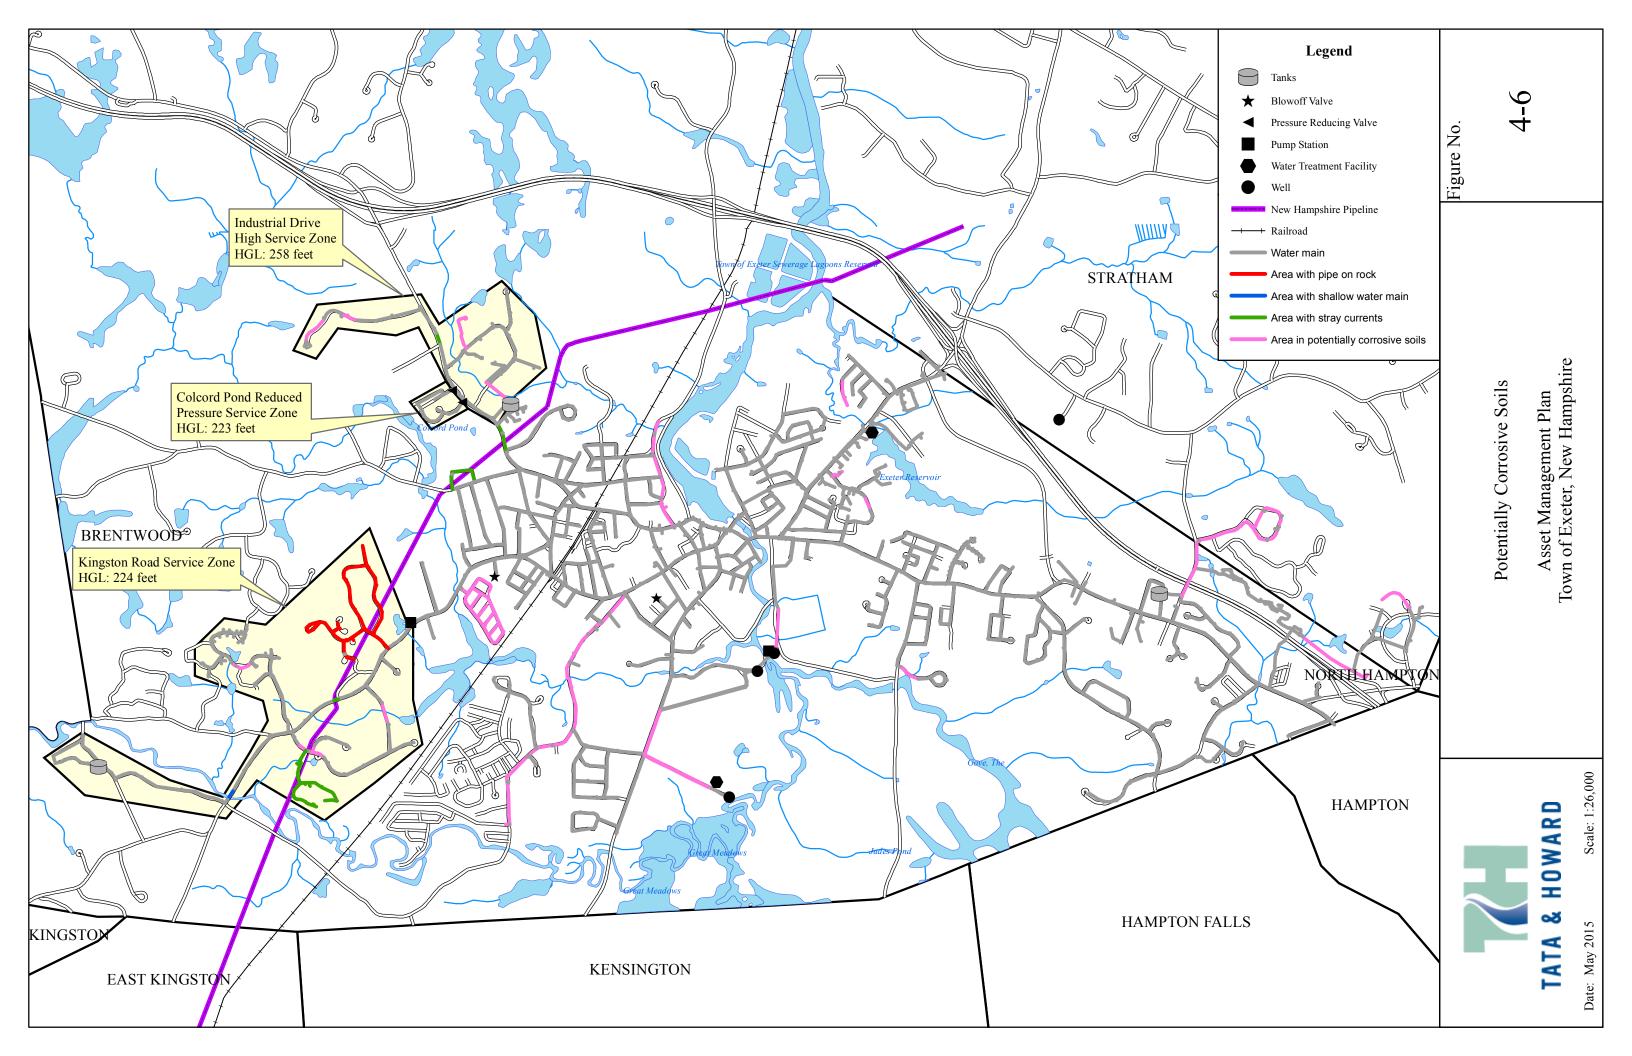


Appendix K FEMA Flood Map 2020


National Flood Hazard Layer FIRMette

42°58'43"N



Legend

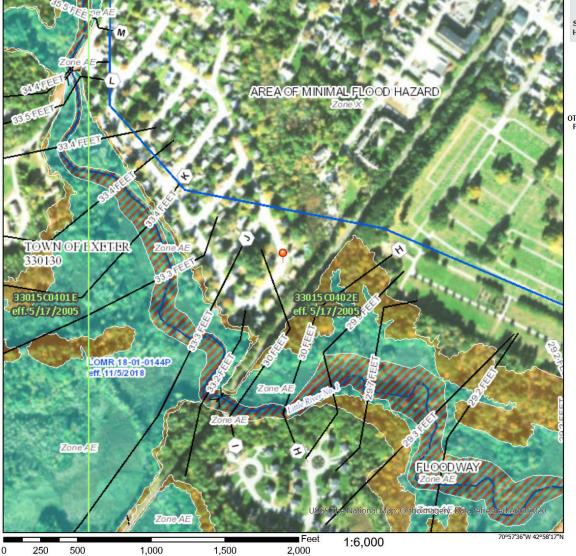

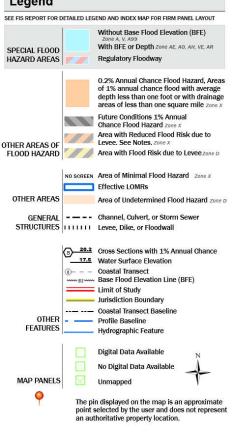

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards


The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 9/23/2020 at 9:49 AM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or horsemended by uservices are not and a subsequent to the subbecome superseded by new data over time.


This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.


Appendix L FEMA 2018 Letter of Map Revision


Document Password Protected Provided Under Separate Cover

Appendix M 2017 LTCP Excerpt

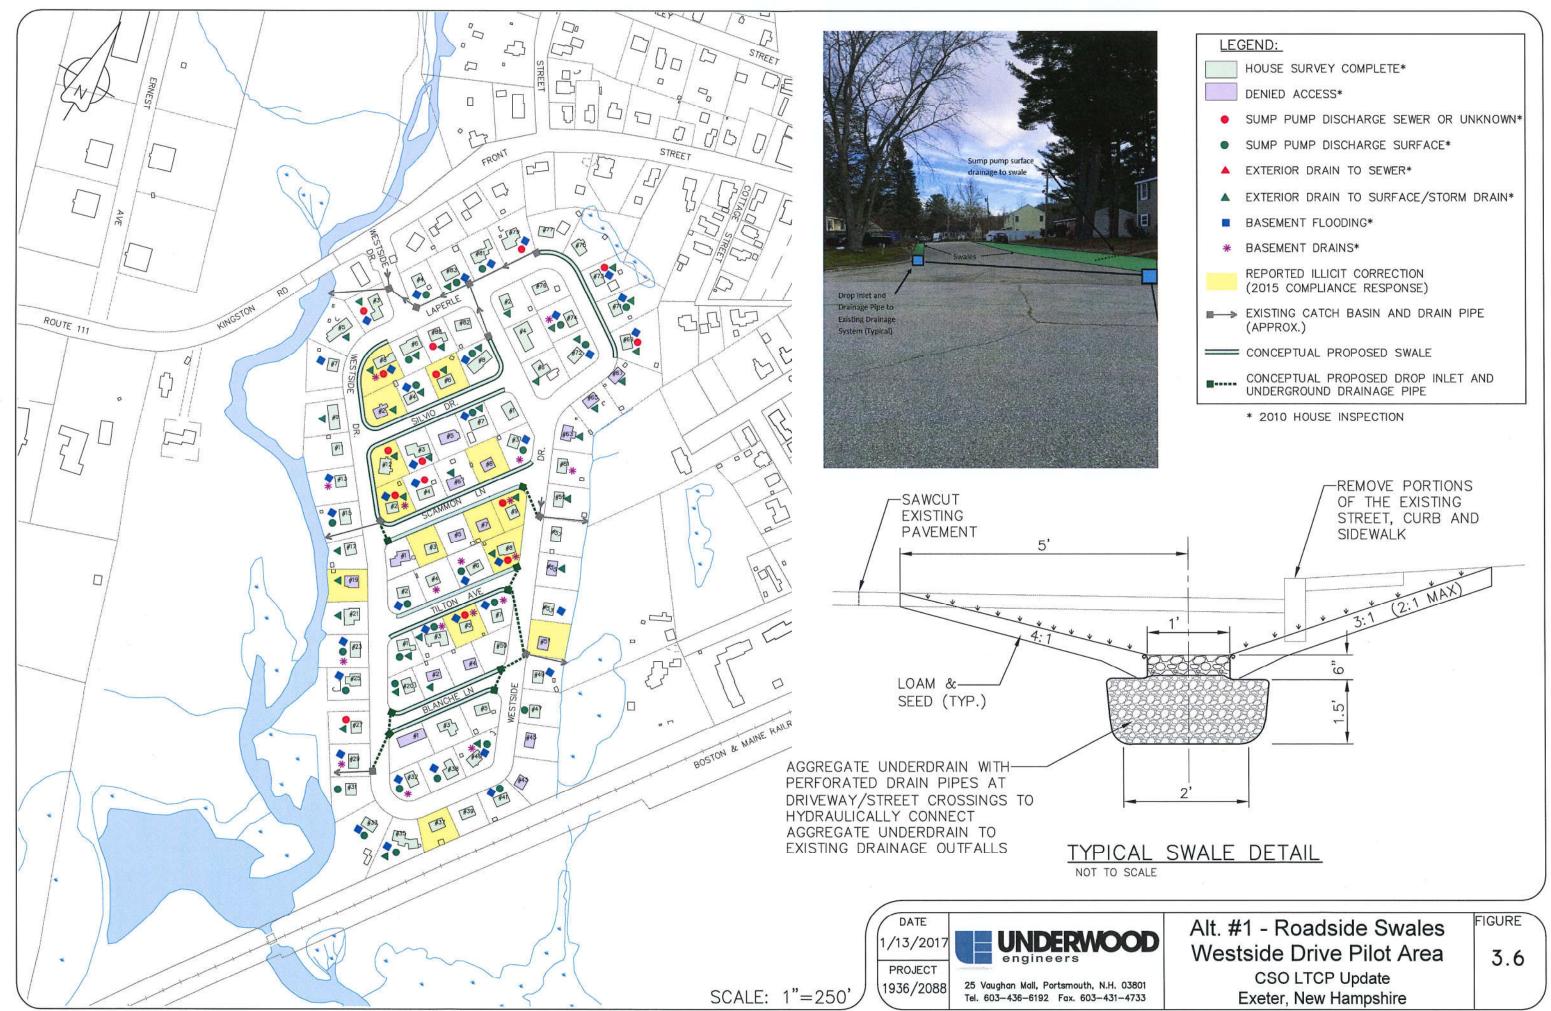


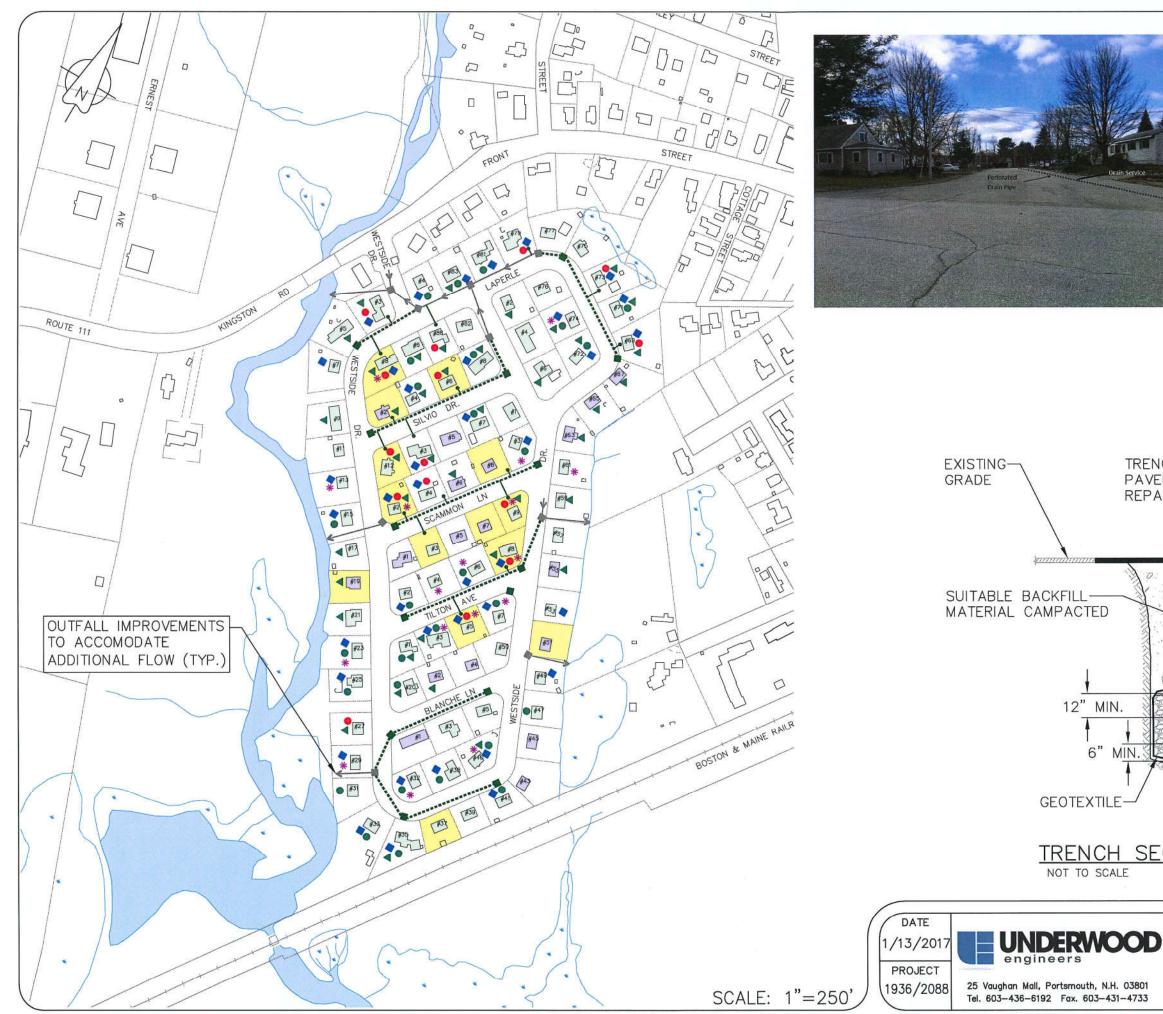

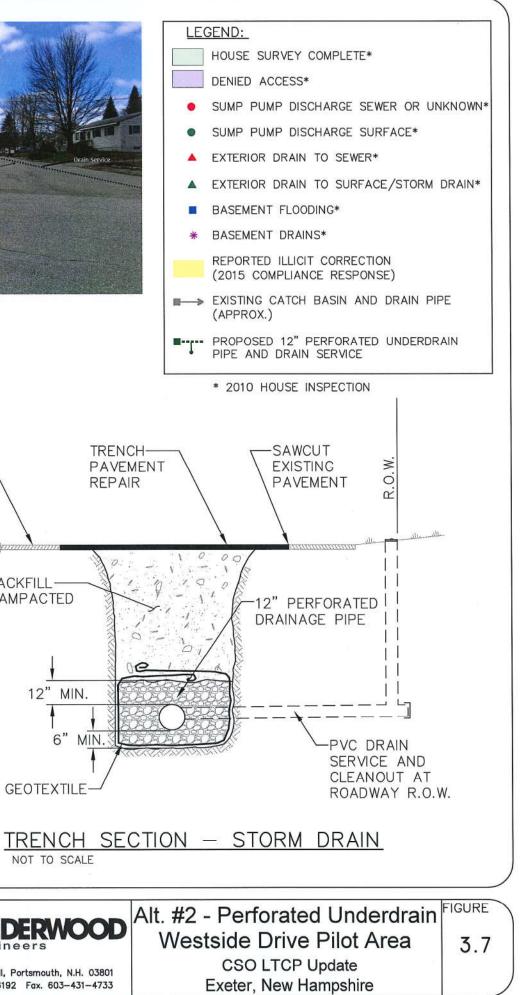

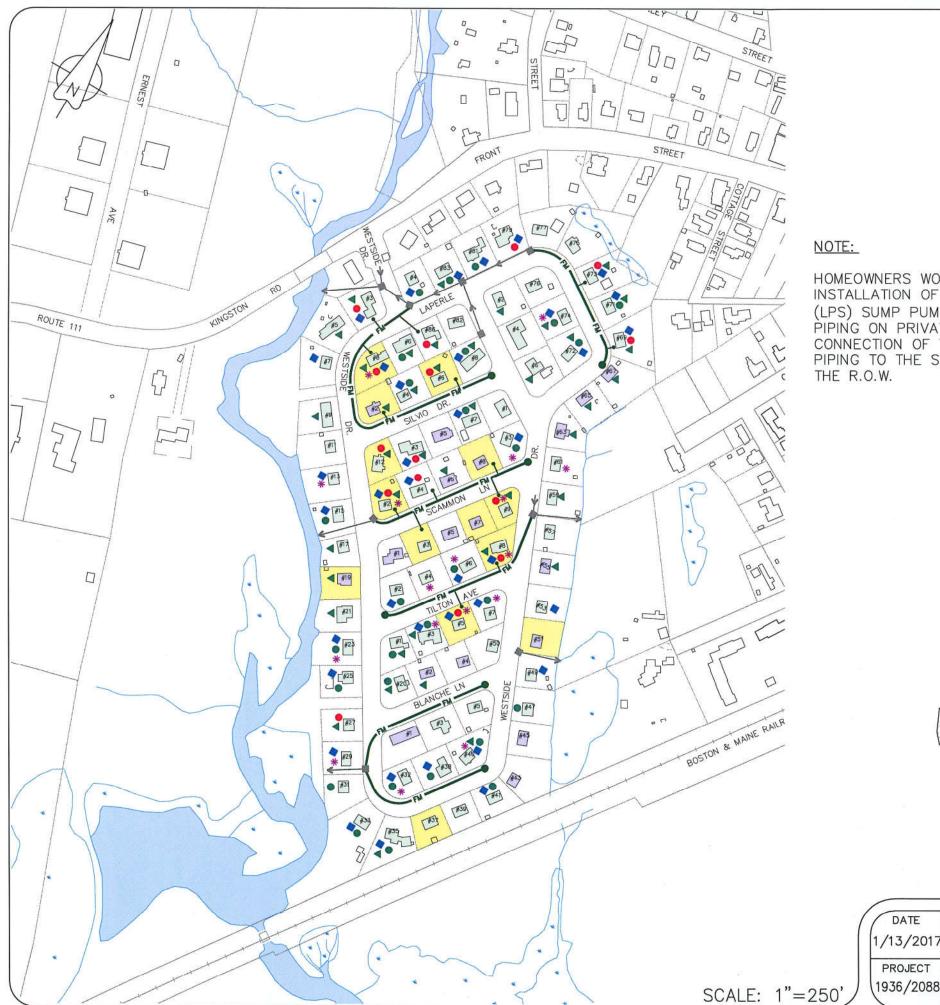

HOMEOWNERS WOULD BE RESPONSIBLE FOR INSTALLATION OF LOW PRESSURE SYSTEM (LPS) SUMP PUMP, SUMP PUMP DISCHARGE PIPING ON PRIVATE PROPERTY, AND CONNECTION OF THE SUMP PUMP DISCHARGE PIPING TO THE SERVICE LATERAL STUB AT

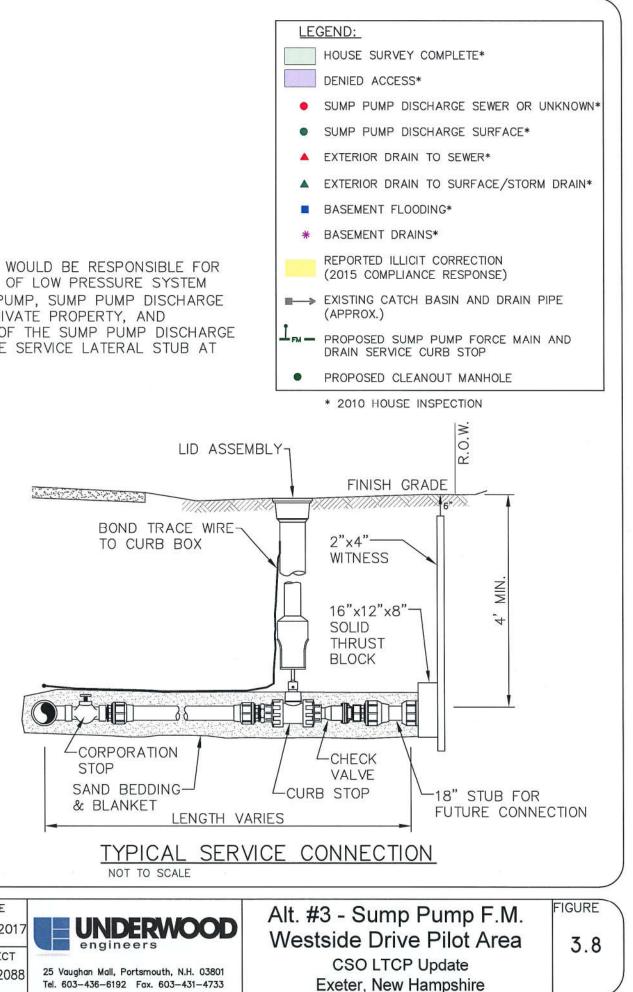

Appendix N Conceptual Cost Opinion 2588 - Westside Drive Conceptual Plan Exeter, NH 23-May-22

			- Alternative	
Base	QTY	Unit	Unit Price	Amount
Full Width Pavement Reclamation (28' Wide)	17,000		\$4.00	\$68,000.00
Additional Stone for Road Base Improvements (3")	1,500		\$25.00	\$37,500.00
Remove, Rehandle and Regrade Roadway Subgrade		Days	\$9,000.00	\$63,000.00
Strip Existing Pavement and Sidewalks (20' wide)	4,000	CY	\$20.00	\$80,000.00
Unuitables Removal		Allow	\$80,000.00	\$80,000.00
Hot Bituminous Pavement (4" Depth x 24' & 28' wide)	3,500		\$150.00	\$525,000.00
Shoulder Gravels	600		\$40.00	\$24,000.00
Loam and Seed	15,000	SY	\$5.00	\$75,000.00
Concrete Sidewalk (4' Wide)	2,100	SY	\$70.00	\$147,000.00
Curbing	3,800	LF	\$40.00	\$152,000.00
Driveway Improvements/Repaving	500	Ton	\$170.00	\$85,000.00
Drain Service To ROW for Sump Connection	50	EA	\$2,500.00	\$125,000.00
Furnish and Install 6" Perforated Underdrain	1,800	LF	\$50.00	\$90,000.00
Furnish and Install 8" Sump Pump Collectors (Interior Rds)	1,400	LF	\$75.00	\$105,000.00
Furnish and Install 12" Perforated Drain Pipe	1,700	LF	\$80.00	\$136,000.00
Furnish and Install 15" to 24" Perforated Drain Pipe	1,000		\$100.00	\$100,000.00
Furnish and install Drain Structures	35	EA	\$8,000.00	\$280,000.00
Modifications to Existing Structures	4	EA	\$2,000.00	\$8,000.00
Outfall Improvements and Possible Treatment	4	EA	\$10,000.00	\$40,000.00
Utility Allowance	1	Allow	\$10,000.00	\$10,000.00
Private Property Restoration Allowance	1	Allow	\$20,000.00	\$20,000.00
8" Water Main with Poly Wrap or PVC	5,500	LF	\$150.00	\$825,000.00
Temporary Water	1	LS	\$350,000.00	\$350,000.00
Water Services	90	EA	\$3,000.00	\$270,000.00
8" Gate Valves	12	EA	\$4,000.00	\$48,000.00
Hydrant Assemblies	8	EA	\$9,000.00	\$72,000.00
Mobilization, General Conditions and Permit Fees (10%)		LS	\$381,550.00	\$381,550.00
			SUBTOTAL	\$4,197,050.00
Easement Allowance	1	Allow	\$10,000.00	\$10,000.00
Contingency (20%)		LS	\$839,410.00	\$839,410.00
Final Design (7%)		LS	\$293,793.50	\$293,793.50
Construction Engineering (13%)		LS	\$545,616.50	\$545,616.50
	1		TOTAL	\$5,890,000.00

Conceptual Engineer's Opinion of Probable Cost - Alternative #1

Escalate to 2022 to 2024 (3.5% per year)	1.035	\$6,300,000.00

2588 - Westside Drive Conceptual Plan Exeter, NH 23-May-22

Conceptual Engineer's Opinion of	f Probabl	le Cost	- Alternative	e #2
Base	QTY	Unit	Unit Price	Amount
Full Width Pavement Reclamation (28' Wide)	17,000	SY	\$4.00	\$68,000.00
Additional Stone for Road Base Improvements (3")	1,500		\$25.00	\$37,500.00
Remove, Rehandle and Regrade Roadway Subgrade	7	Days	\$9,000.00	\$63,000.00
Strip Existing Pavement and Sidewalks (20' wide)	4,000		\$20.00	\$80,000.00
Unuitables Removal	1	Allow	\$80,000.00	\$80,000.00
Hot Bituminous Pavement (4" Depth x 28' wide)	3,800	Ton	\$150.00	\$570,000.00
Shoulder Gravels	600	CY	\$40.00	\$24,000.00
Loam and Seed	15,000	SY	\$5.00	\$75,000.00
Concrete Sidewalk (4' Wide)	300	SY	\$70.00	\$21,000.00
Curbing	600	LF	\$40.00	\$24,000.00
Driveway Improvements/Repaving	500	Ton	\$170.00	\$85,000.00
Drain Service To ROW for Sump Connection	50	EA	\$2,500.00	\$125,000.00
Furnish and Install 6" Perforated Underdrain	1,800	LF	\$50.00	\$90,000.00
Furnish and Install 8" Sump Pump Collectors (Interior Rds)	1,400	LF	\$75.00	\$105,000.00
Furnish and Install 12" Perforated Drain Pipe	1,700	LF	\$80.00	\$136,000.00
Furnish and Install 15" to 24" Perforated Drain Pipe	1,000	LF	\$100.00	\$100,000.00
Furnish and install Drain Structures	35	EA	\$8,000.00	\$280,000.00
Modifications to Existing Structures	4	EA	\$2,000.00	\$8,000.00
Outfall Improvements and Possible Treatment	4	EA	\$10,000.00	\$40,000.00
Utility Allowance	1	Allow	\$10,000.00	\$10,000.00
Private Property Restoration Allowance	1	Allow	\$20,000.00	\$20,000.00
8" Water Main with Poly Wrap or PVC	5,500	LF	\$150.00	\$825,000.00
Temporary Water	1	LS	\$350,000.00	\$350,000.00
Water Services	90	EA	\$3,000.00	\$270,000.00
8" Gate Valves	12	EA	\$4,000.00	\$48,000.00
Hydrant Assemblies	8	EA	\$9,000.00	\$72,000.00
Mobilization, General Conditions and Permit Fees (10%)	1	LS	\$360,650.00	\$360,650.00
			SUBTOTAL	\$3,967,150.00
Easement Allowance		Allow	\$10,000.00	\$10,000.00
Contingency (20%)		LS	\$793,430.00	\$793,430.00
Final Design (7%)		LS	\$277,700.50	\$277,700.50
Construction Engineering (13%)	1	LS	\$515,729.50	\$515,729.50
			TOTAL	\$5,560,000.00

Conceptual Engineer's Opinion of Probable Cost - Alternative #2

Escalate to 2022 to 2024 (3.5% per year)	1.035	\$6,000,000.00