


**ADDENDUM 2**

The following information is forwarded to all qualified bidders for the above project for bids due Junel 1, 2026 at 3:00 PM. This addendum shall be signed by all BIDDERS and included with the Bid Form.

This addendum is issued pursuant to a question raised by a prospective bidder.

The bidder asked whether the concrete base under the cobblestone truck apron under the cobblestone alternate bid item needs to be reinforced, and if so, would the reinforcing differ from the reinforcing noted in Addendum 1 for the concrete truck apron?

The answer is that the reinforcing for the 6" concrete base under the cobblestone setting bed shall be 6" x 6" W2.9 x W2.9 Welded Wire Fabric. It is not as critical to resist cracking since the concrete base would not be visible under the cobblestones, but the wire mesh would serve to resist heaving of any cracked pieces.

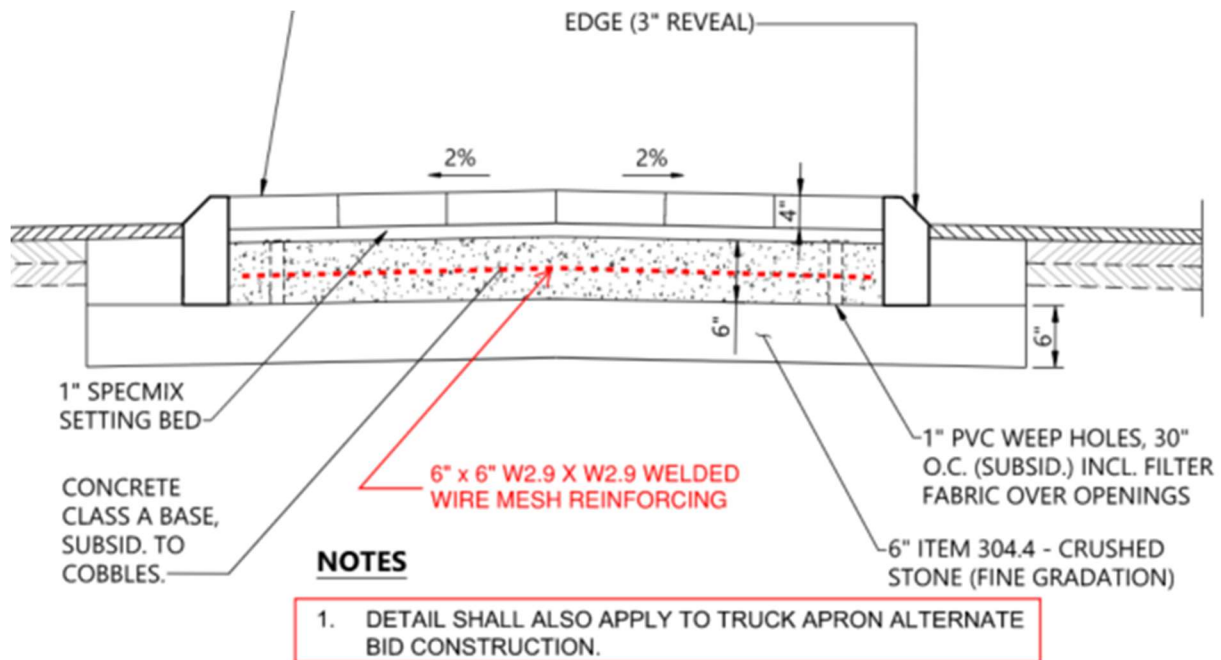

**ALTERNATE BID DESIGN**

**Median Islands With Beveled Curb And Cobblestone Infill**

N.T.S.

The below BIDDER acknowledges receipt of this information.

BIDDER's Name: \_\_\_\_\_ Date: \_\_\_\_\_

COMPANY NAME: \_\_\_\_\_